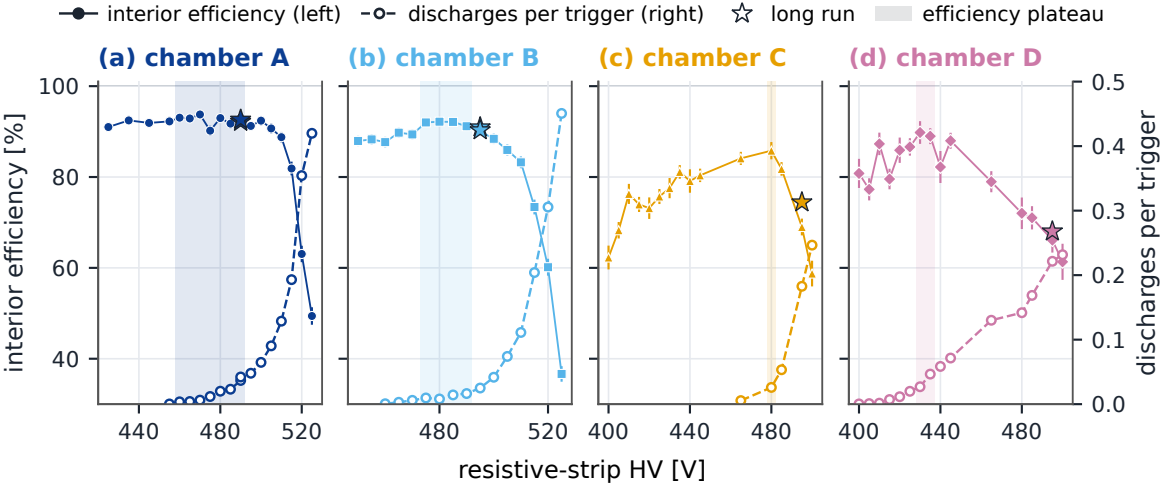
interior efficiency (left)
discharges per trigger (right)
long run
efficiency plateau
(a) chamber A
(b) chamber B
(c) chamber C
(d) chamber D
interior efficiency [%]
discharges per trigger
resistive-strip HV [V]
100
80
60
40
0.5
0.4
0.3
0.2
0.1
0.0
440
480
520
400
440
480
520
480
520
400
440
480
400
440
480