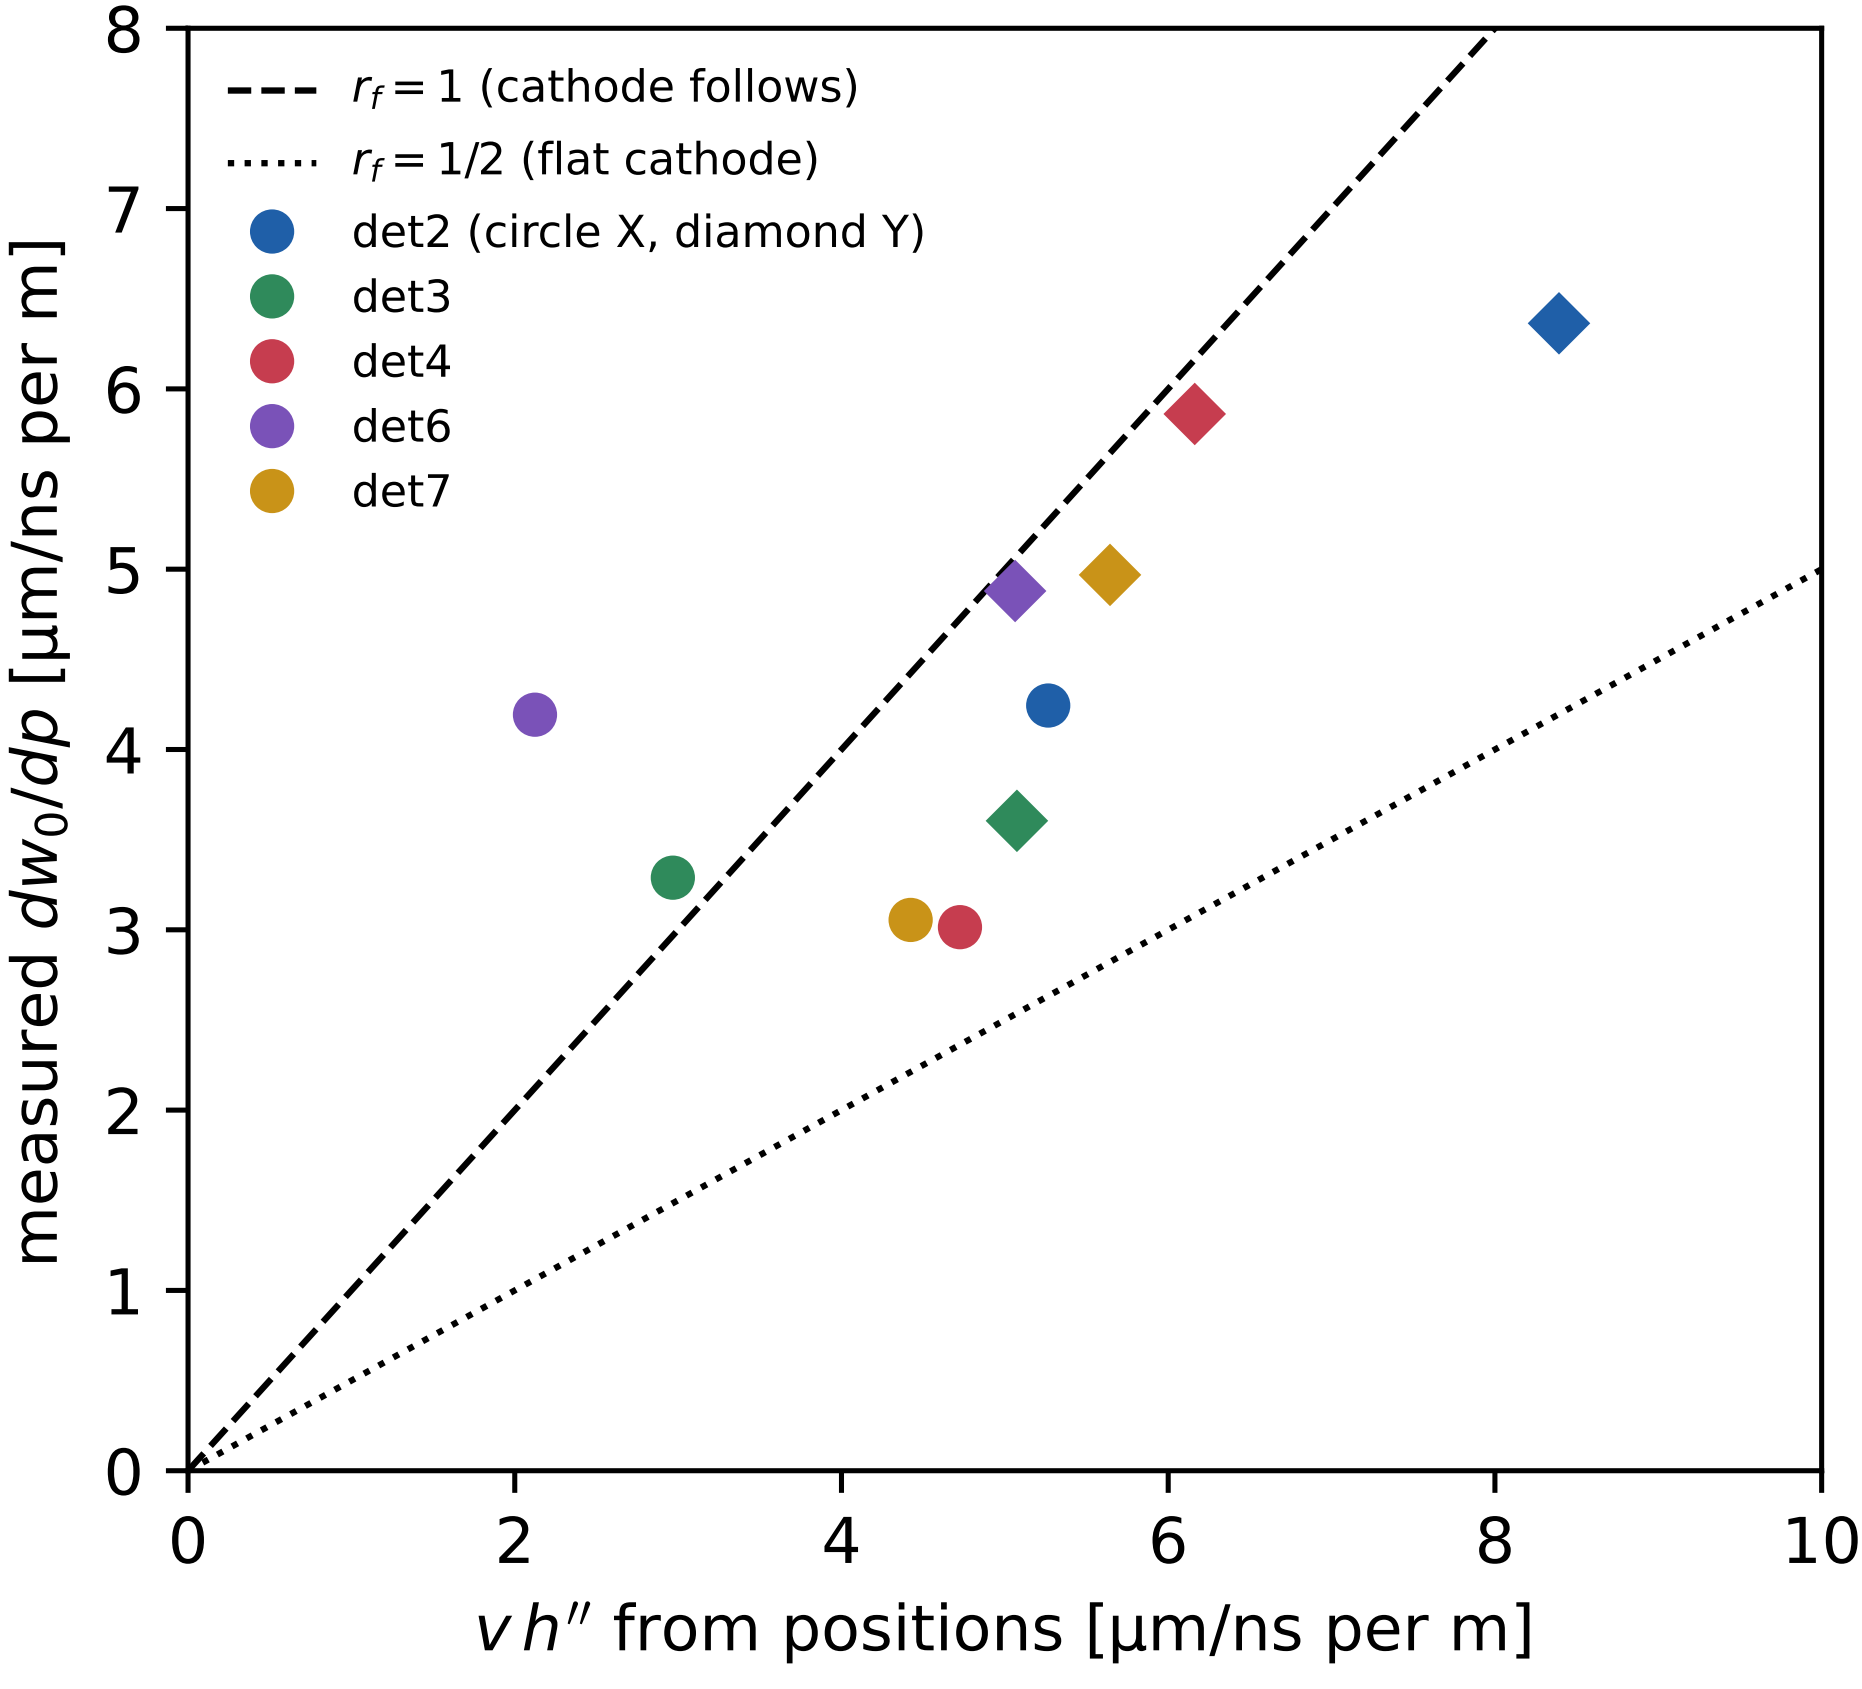
$r_f = 1$ (cathode follows)
$r_f = 1/2$ (flat cathode)
det2 (circle X, diamond Y)
det3
det4
det6
det7
measured dw_0/dp [µm/ns per m]
$v\,h''$ from positions [µm/ns per m]
0
1
2
3
4
5
6
7
8
0
2
4
6
8
10