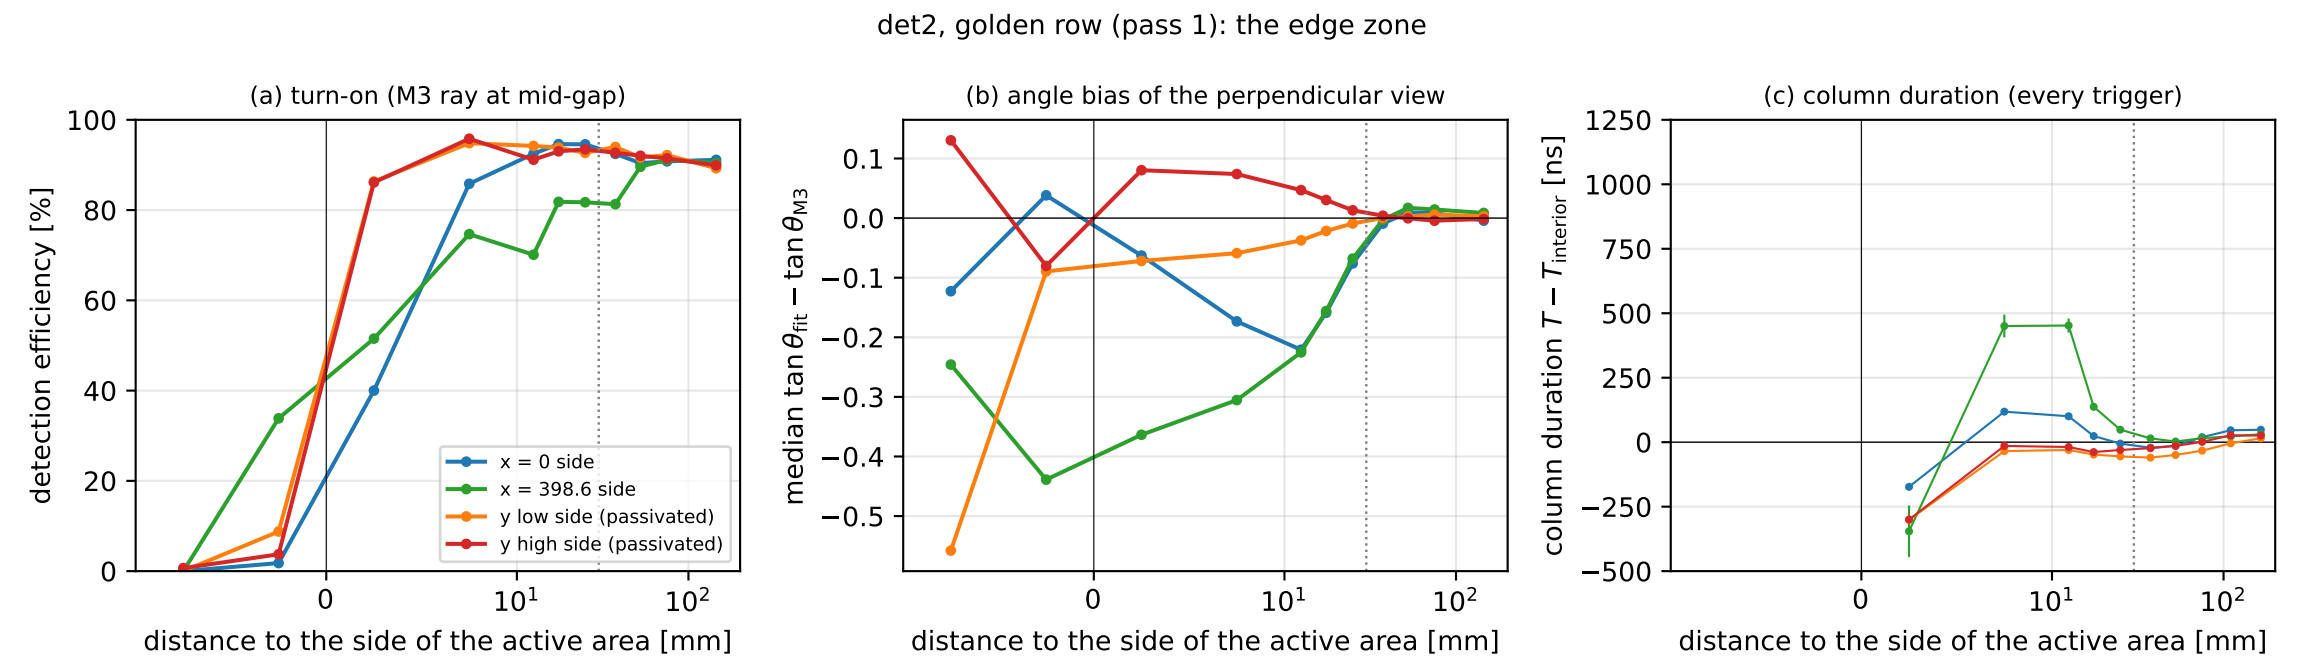
det2, golden row (pass 1): the edge zone
(a) turn-on (M3 ray at mid-gap)
detection efficiency [%]
distance to the side of the active area [mm]
x = 0 side
x = 398.6 side
y low side (passivated)
y high side (passivated)
(b) angle bias of the perpendicular view
median $\tan\theta_{\mathrm{fit}} - \tan\theta_{\mathrm{M3}}$
distance to the side of the active area [mm]
(c) column duration (every trigger)
column duration $T - T_{\mathrm{interior}}$ [ns]
distance to the side of the active area [mm]