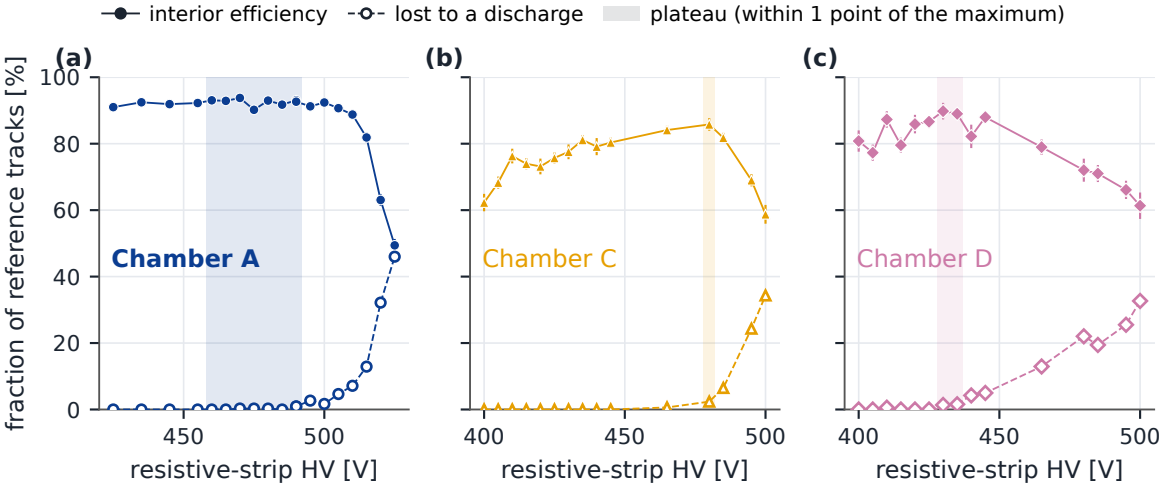
interior efficiency
lost to a discharge
plateau (within 1 point of the maximum)
(a)
(b)
(c)
fraction of reference tracks [%]
100
80
60
40
20
0
Chamber A
Chamber C
Chamber D
450
500
400
450
500
400
450
500
resistive-strip HV [V]
resistive-strip HV [V]
resistive-strip HV [V]