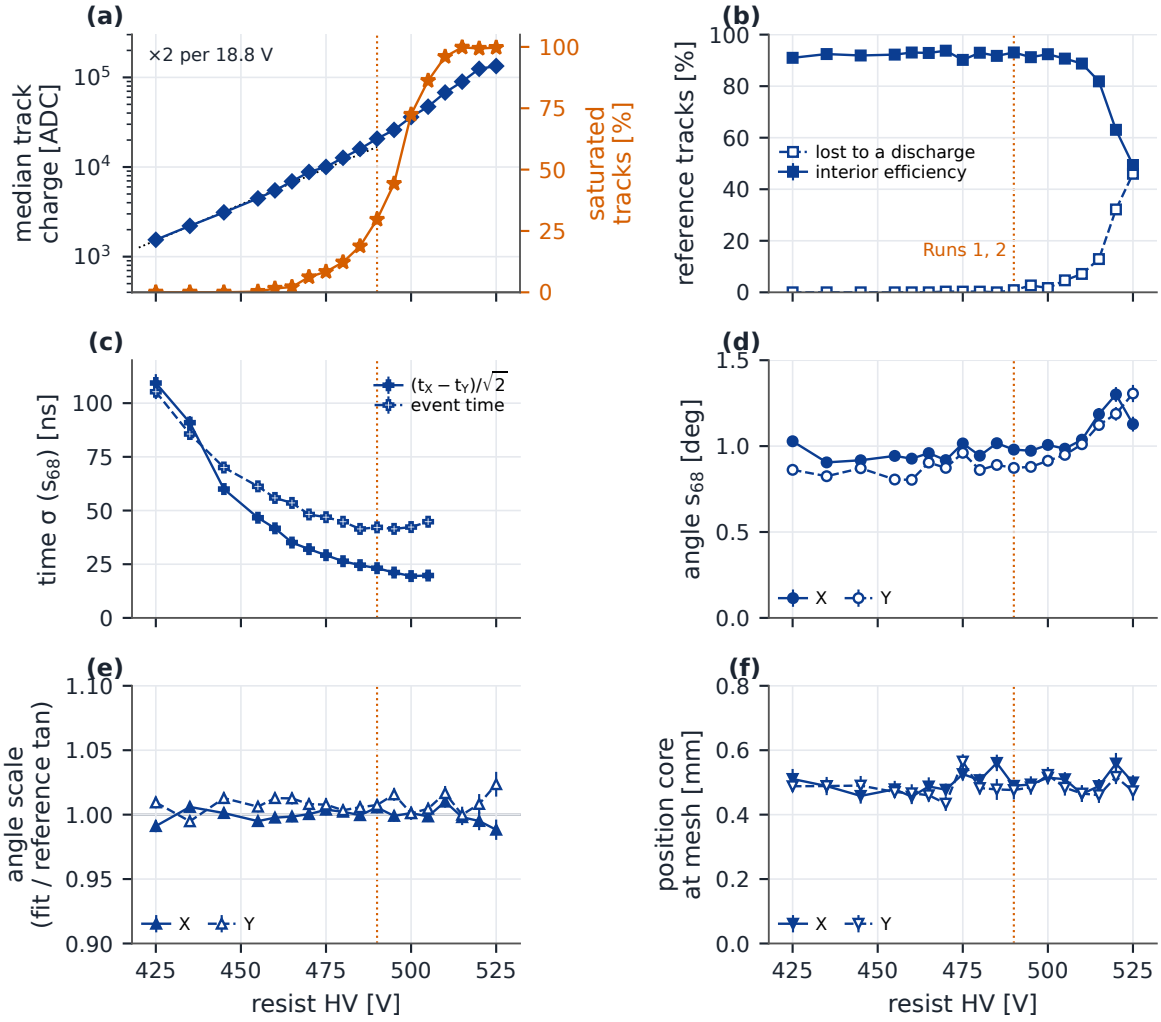
(a)
×2 per 18.8 V
median track charge [ADC]
saturated tracks [%]
(b)
reference tracks [%]
lost to a discharge
interior efficiency
Runs 1, 2
(c)
time σ (s68) [ns]
(tX − tY)/√2
event time
(d)
angle s68 [deg]
X
Y
(e)
angle scale (fit / reference tan)
X
Y
(f)
position core at mesh [mm]
X
Y
resist HV [V]
resist HV [V]