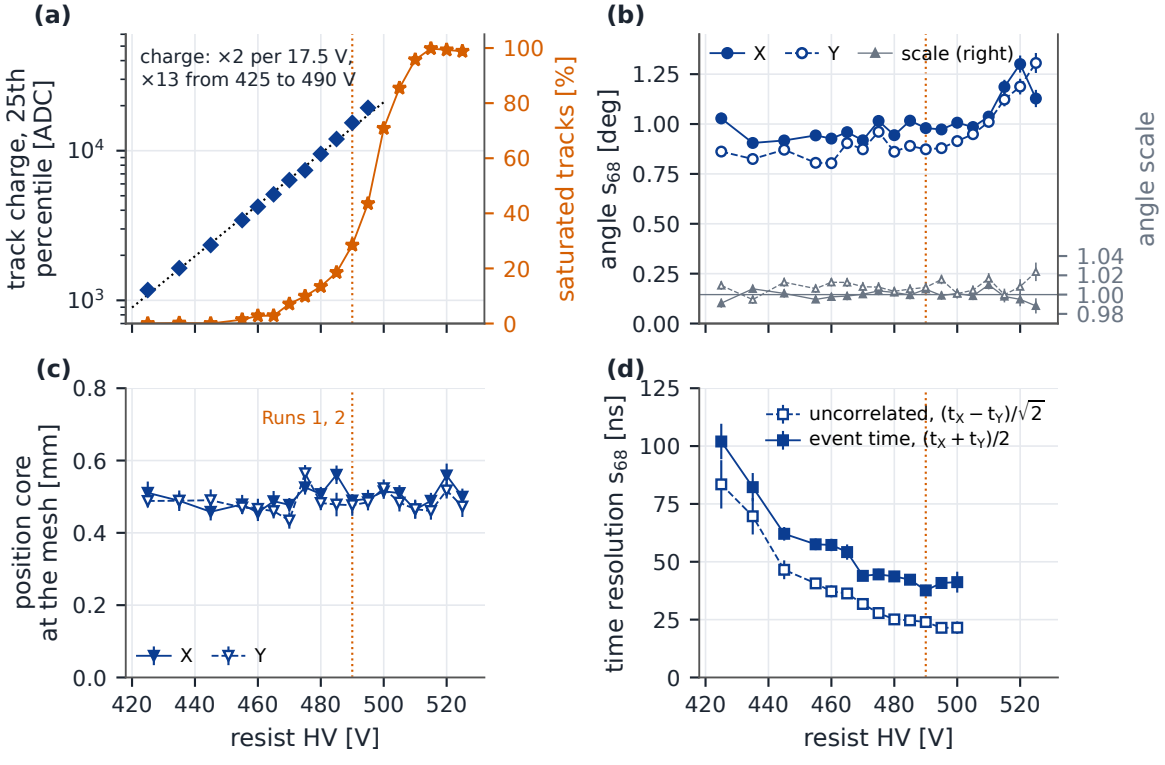
(a)
charge: ×2 per 17.5 V,
×13 from 425 to 490 V
track charge, 25th percentile [ADC]
saturated tracks [%]
(b)
X
Y
scale (right)
angle s68 [deg]
angle scale
(c)
Runs 1, 2
position core at the mesh [mm]
X
Y
resist HV [V]
(d)
uncorrelated, (tX − tY)/√2
event time, (tX + tY)/2
time resolution s68 [ns]
resist HV [V]