
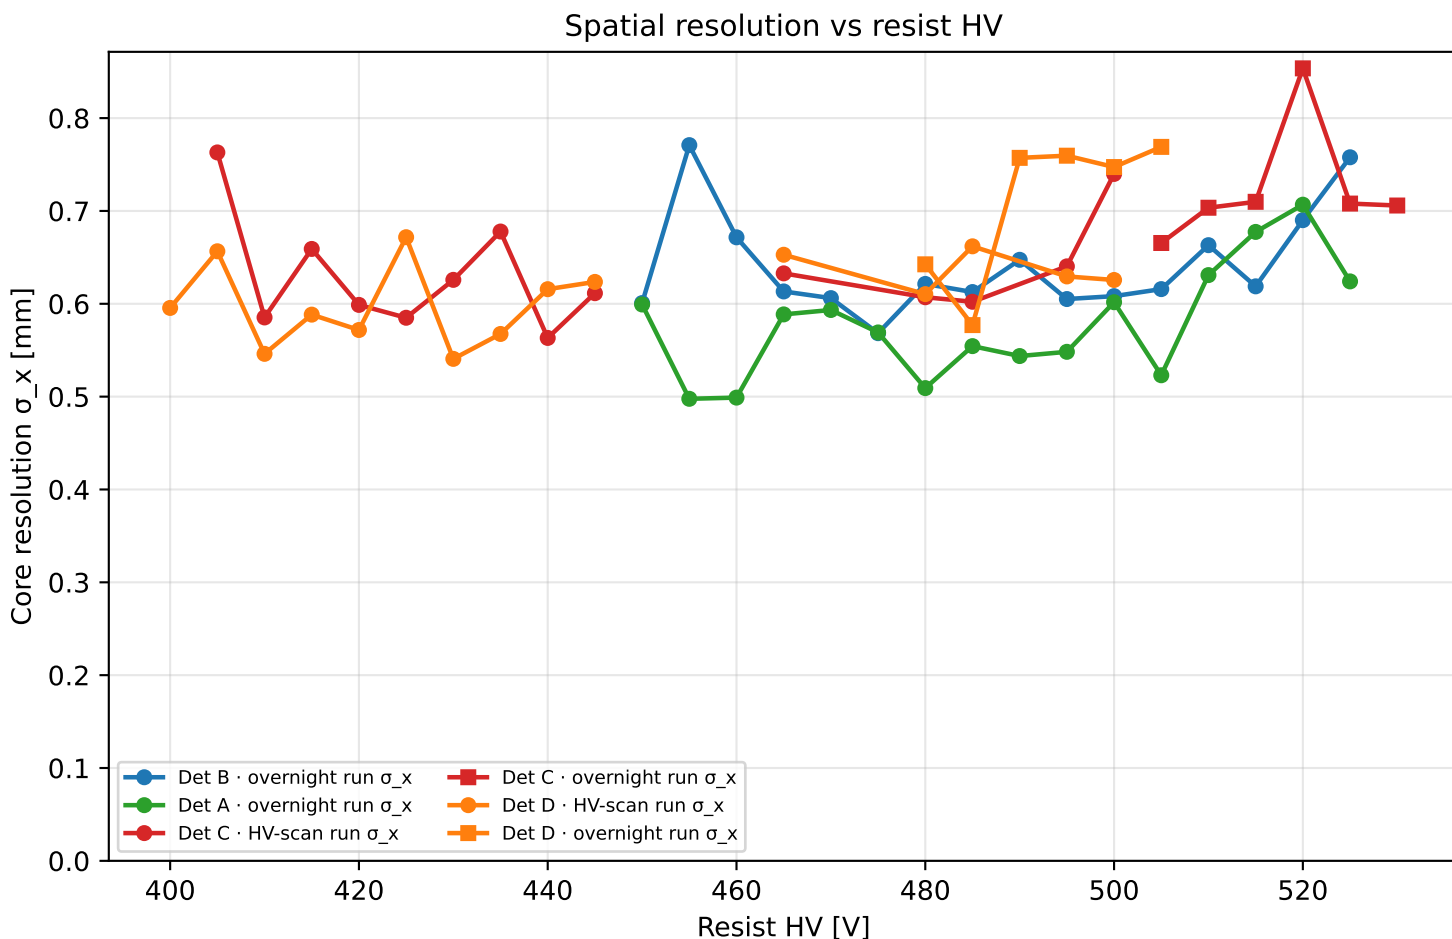


June resist-HV scans — efficiency & resolution

Efficiency = reco within 5 mm of the M3 track, in a fixed per-detector active box.

6-22: Det B+A (det2+det3) resist stepped together (drift 1000 V). 6-26: Det C+D (det6+det7) resist stepped together (drift 700 V).

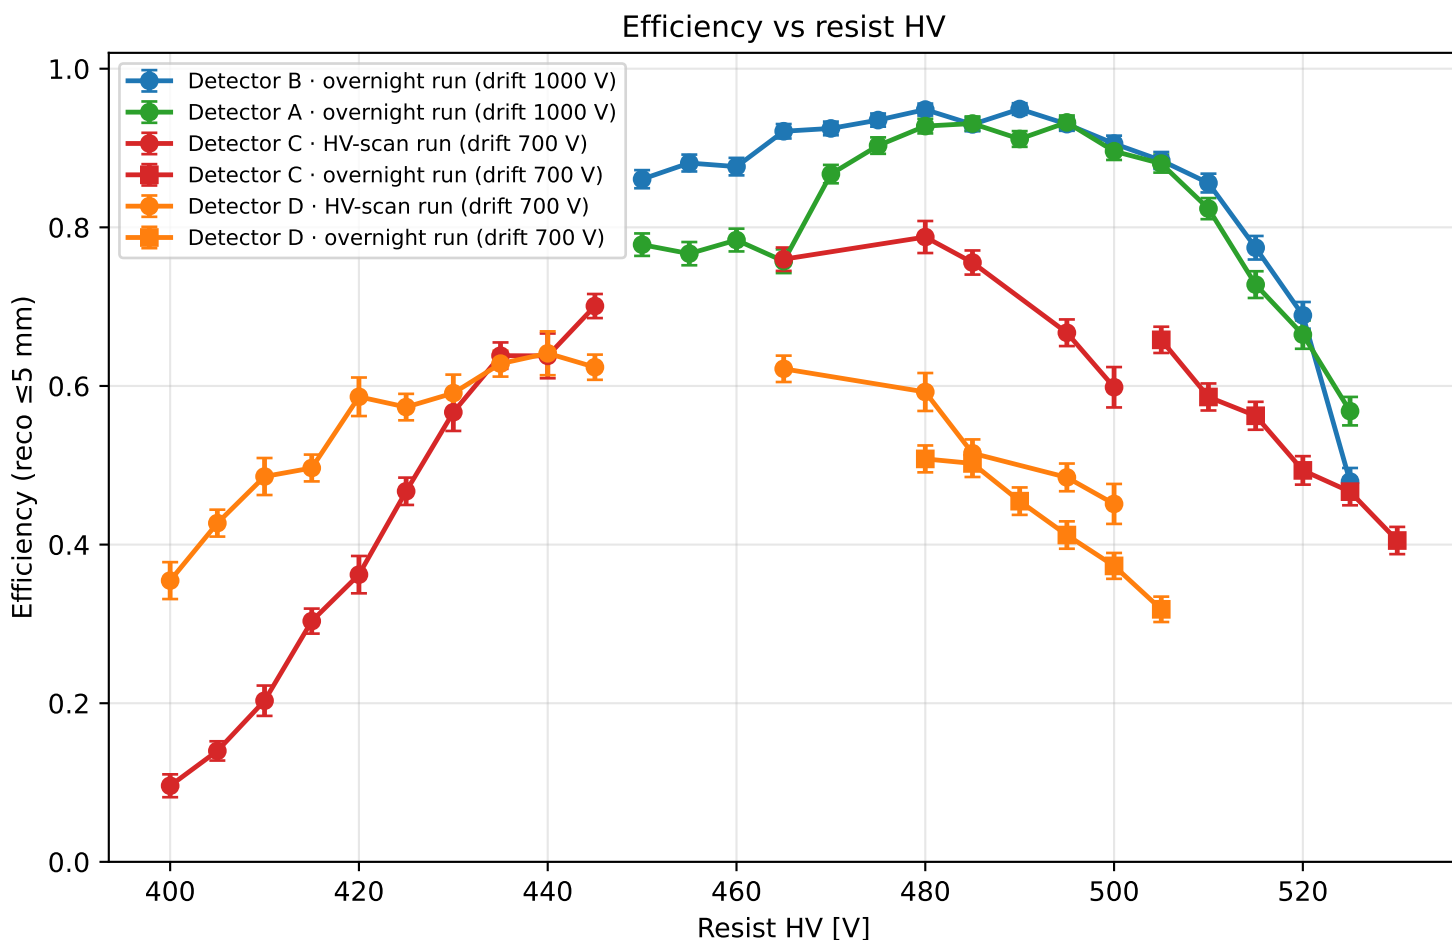

Detector A

resist HV scan (mx17_3)

93.2%

495 V



0.55 mm 450–525 V

Peak efficiency

at resist HV

σ at peak

HV range

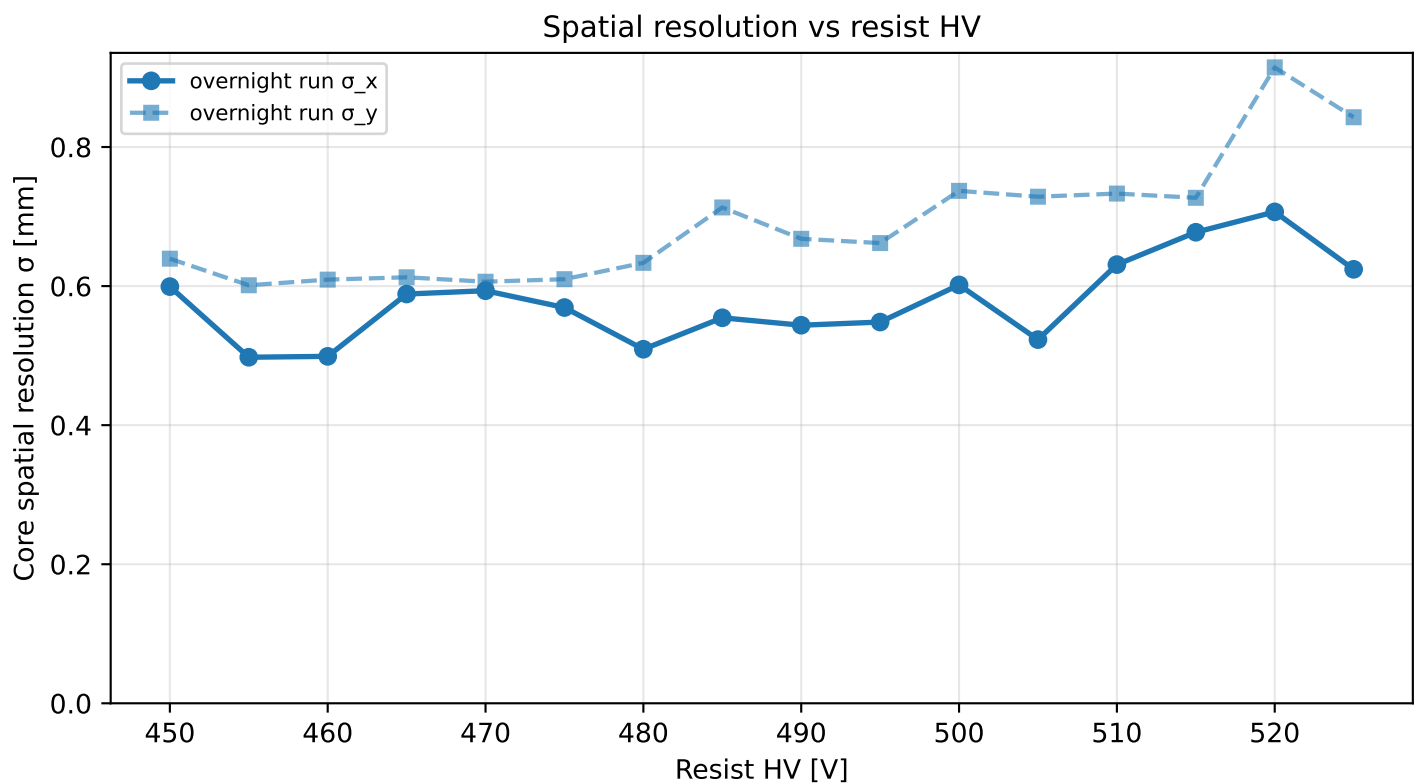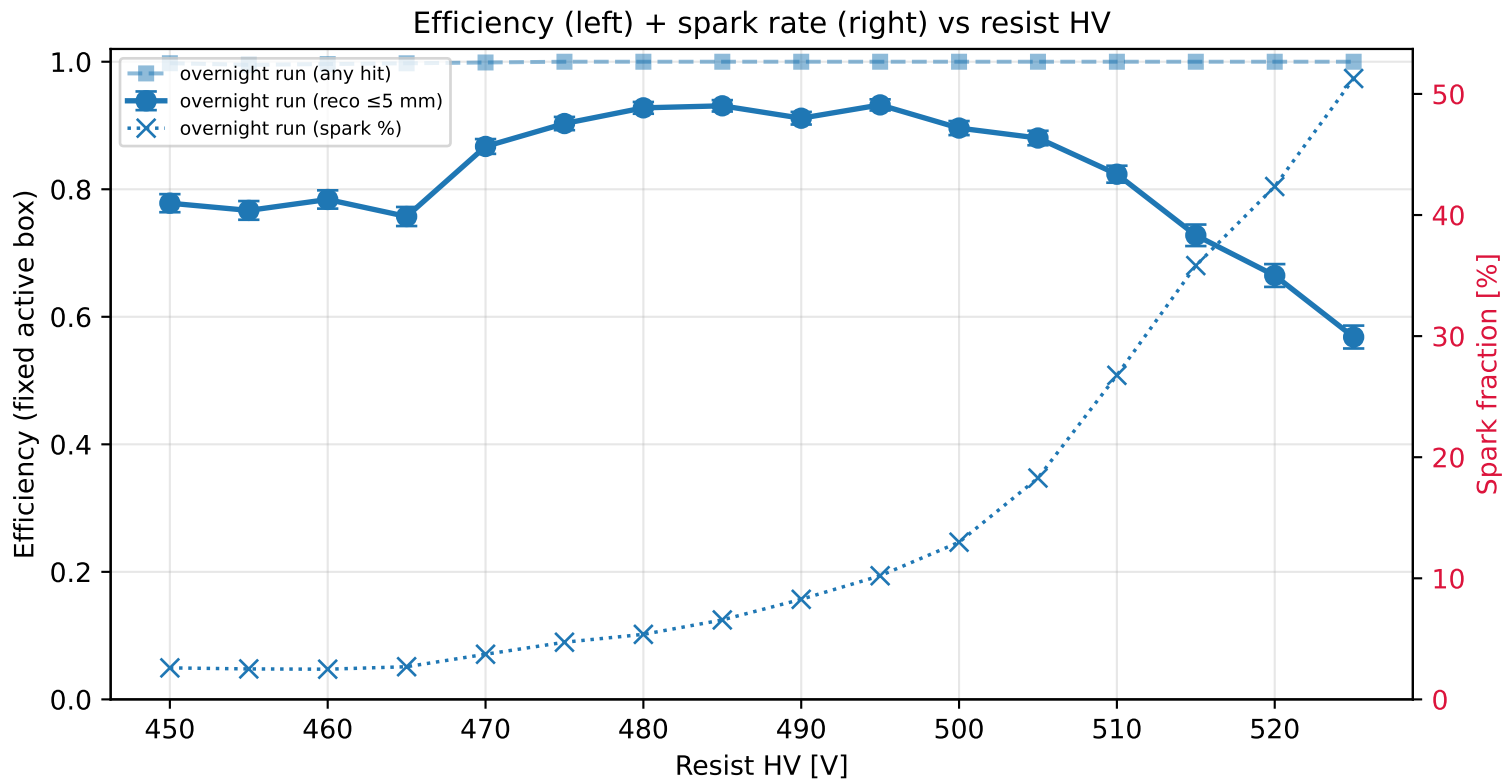

Detector B

resist HV scan (mx17_2)

94.9%

490 V

0.65 mm



450–525 V

Peak efficiency

at resist HV

σ at peak

HV range

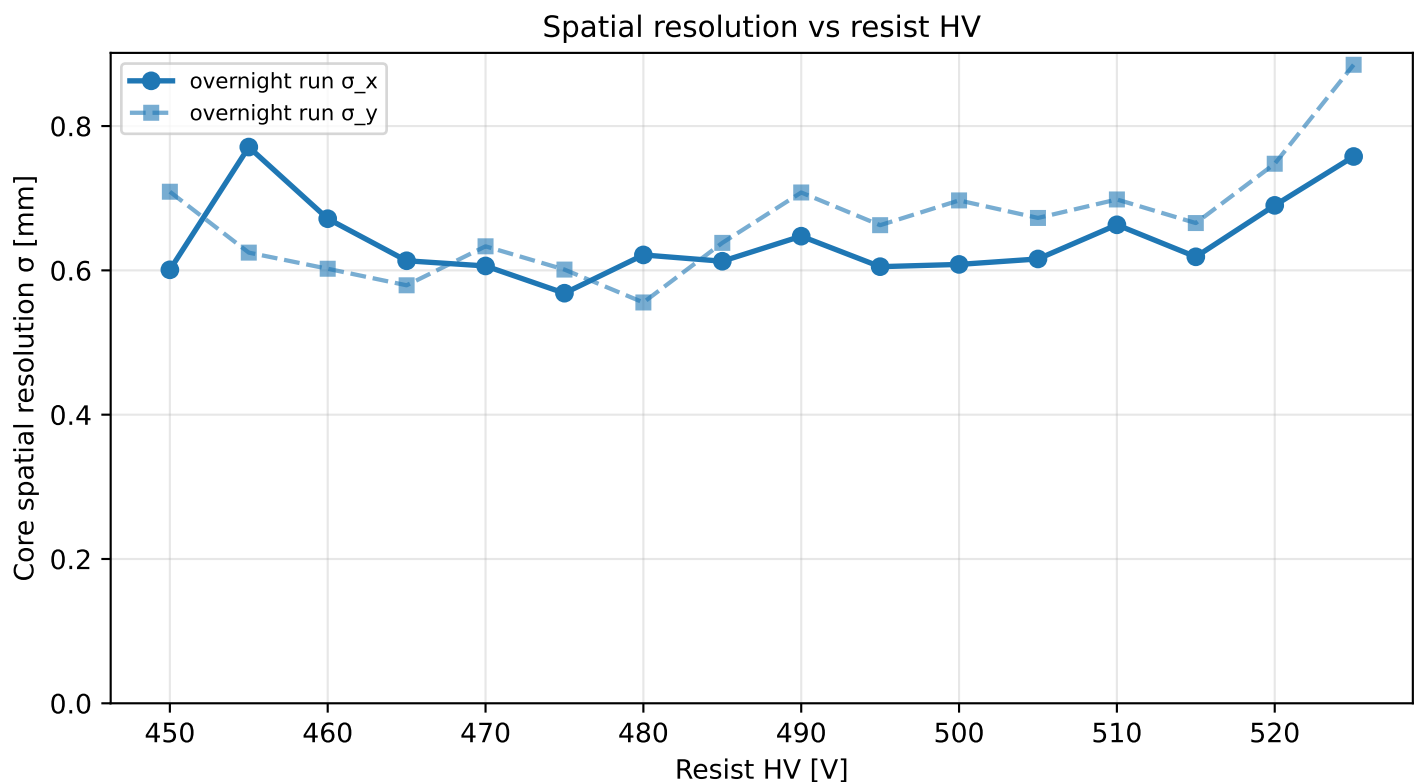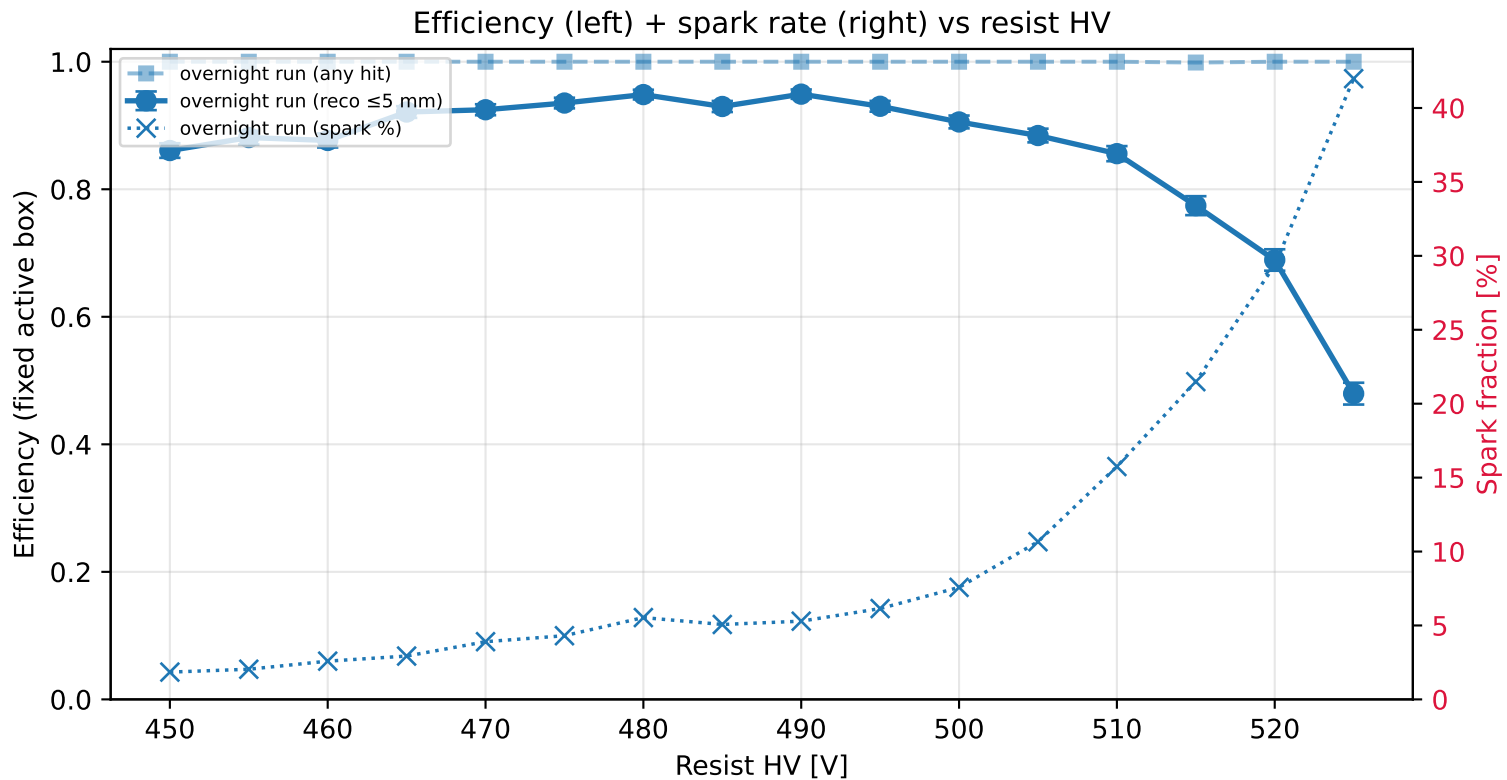

Detector C

resist HV scan (mx17_6)



78.8% **480 V** **0.61 mm** **400-530 V**

Peak efficiency

at resist HV

σ at peak

HV range

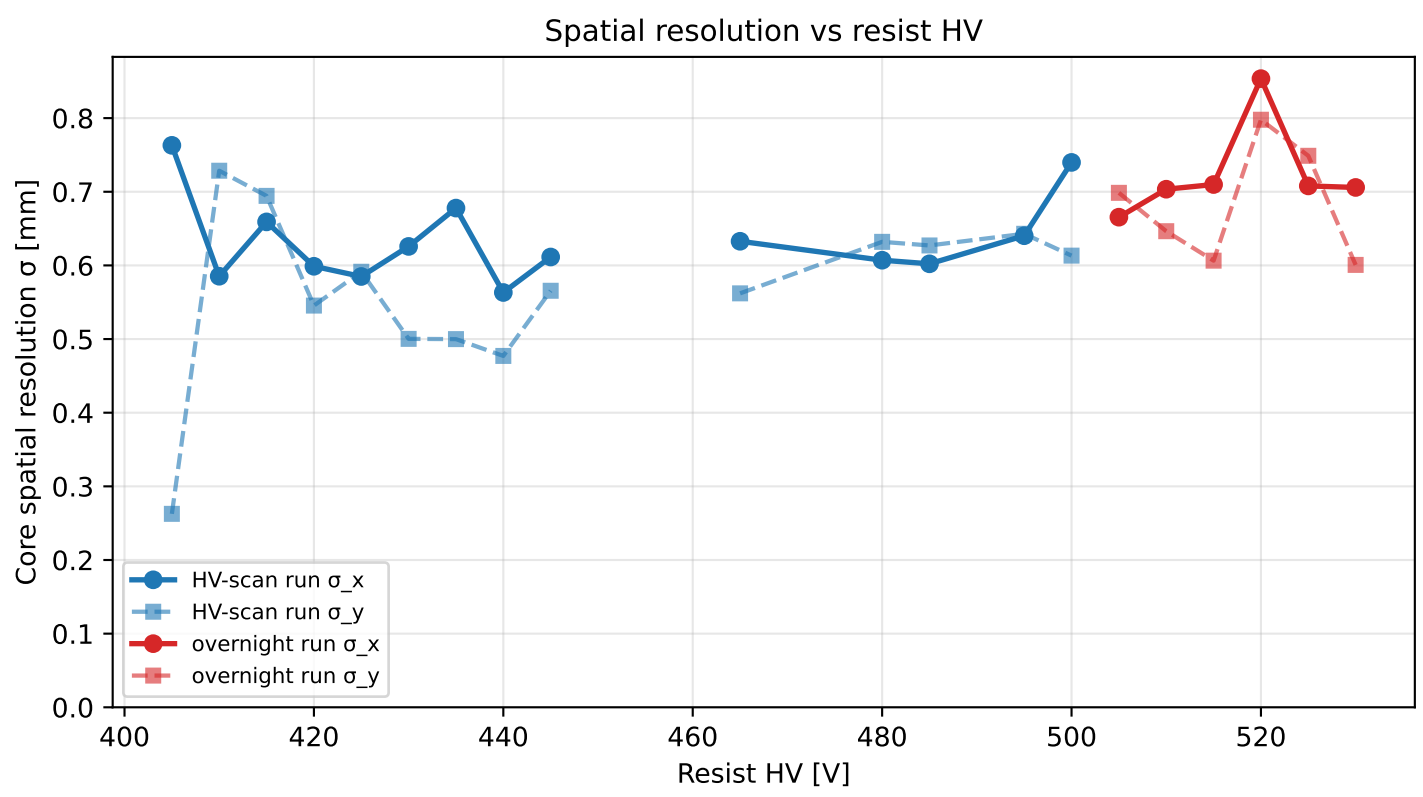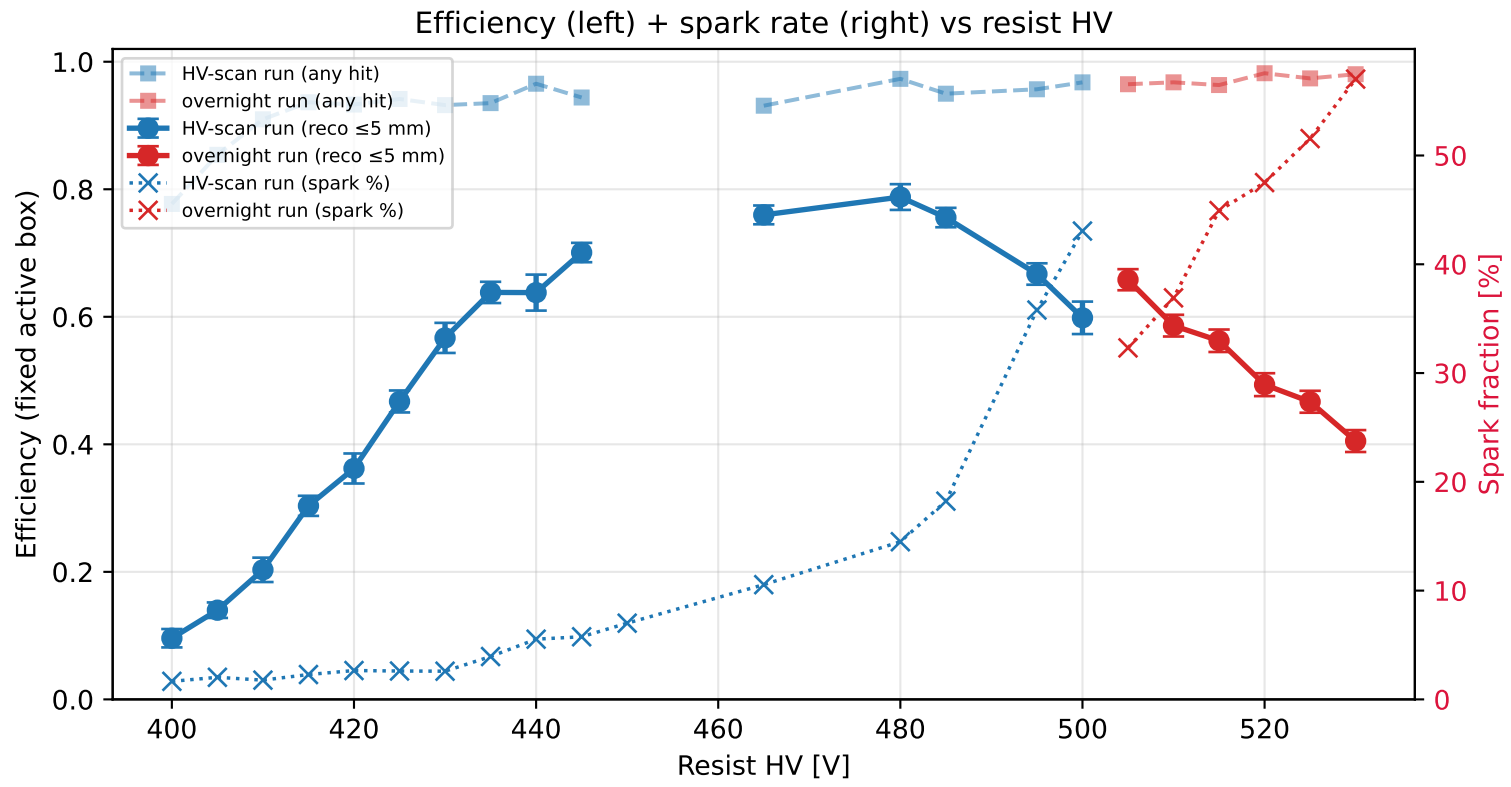

Detector D

resist HV scan (mx17_7)

64.1% **440 V** **0.62 mm** **400-505 V**

Peak efficiency

at resist HV

σ at peak

HV range

