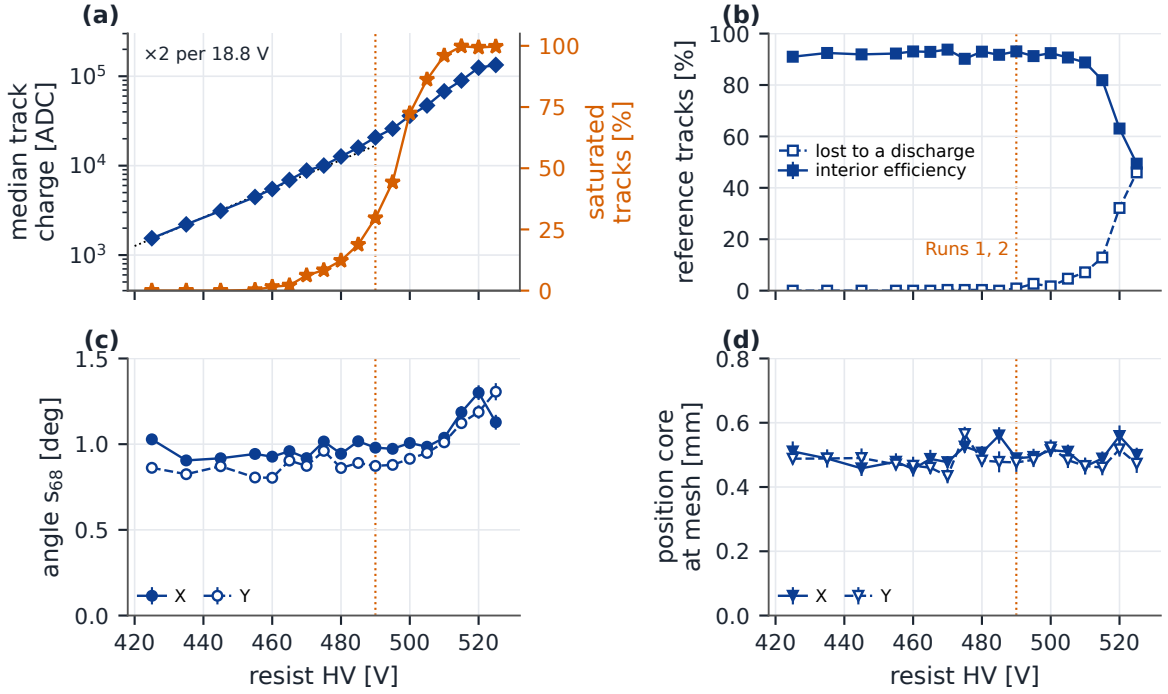
(a)
×2 per 18.8 V
median track charge [ADC]
saturated tracks [%]
(b)
reference tracks [%]
lost to a discharge
interior efficiency
Runs 1, 2
(c)
angle s_{68} [deg]
X
Y
resist HV [V]
(d)
position core at mesh [mm]
X
Y
resist HV [V]