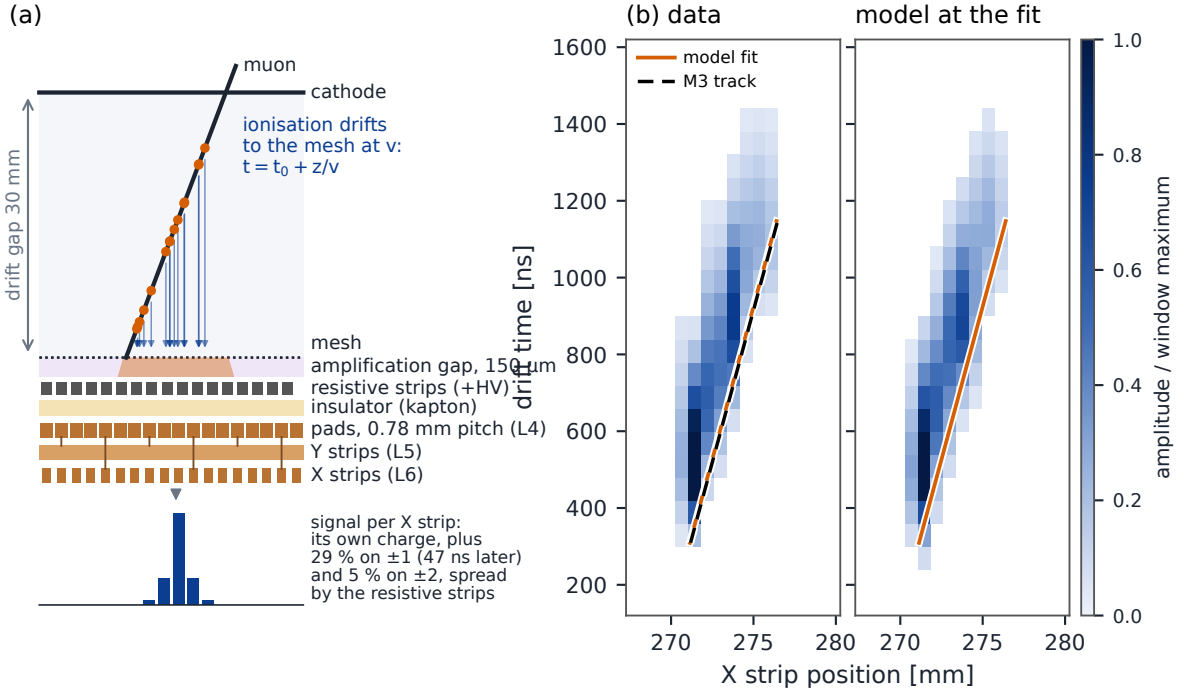
(a)
muon
cathode
ionisation drifts
to the mesh at v:
t = t0 + z/v
drift gap 30 mm
mesh
amplification gap, 150 µm
resistive strips (+HV)
insulator (kapton)
pads, 0.78 mm pitch (L4)
Y strips (L5)
X strips (L6)
signal per X strip:
its own charge, plus
29 % on ±1 (47 ns later)
and 5 % on ±2, spread
by the resistive strips
(b) data
model at the fit
model fit
M3 track
drift time [ns]
X strip position [mm]
amplitude / window maximum
1600
1400
1200
1000
800
600
400
200
270
275
280
1.0
0.8
0.6
0.4
0.2
0.0