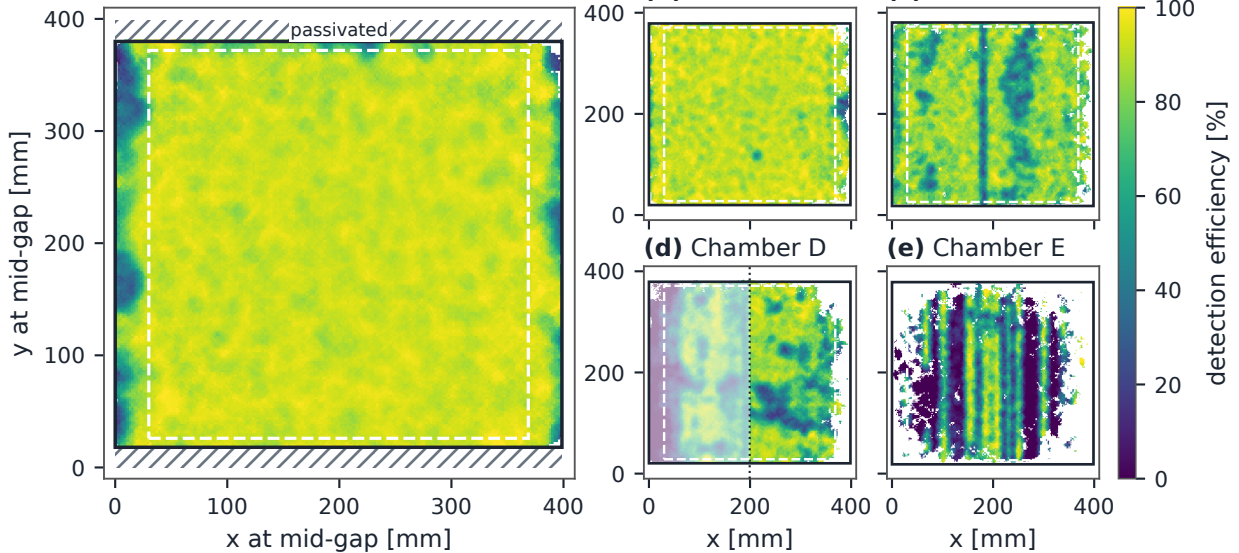

(a) Chamber A
passivated
(b) Chamber B
(c) Chamber C
(d) Chamber D
(e) Chamber E
y at mid-gap [mm]
x at mid-gap [mm]
x [mm]
x [mm]
detection efficiency [%]
0
100
200
300
400
0
20
40
60
80
100