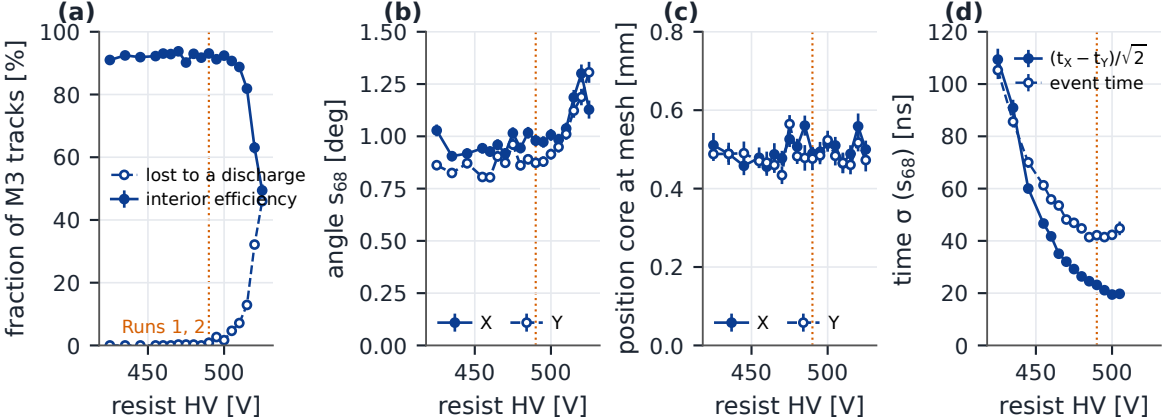
(a)
fraction of M3 tracks [%]
lost to a discharge
interior efficiency
Runs 1, 2
resist HV [V]
(b)
angle $s_{68}$ [deg]
X
Y
resist HV [V]
(c)
position core at mesh [mm]
X
Y
resist HV [V]
(d)
time σ ($s_{68}$) [ns]
$(t_X - t_Y)/\sqrt{2}$
event time
resist HV [V]