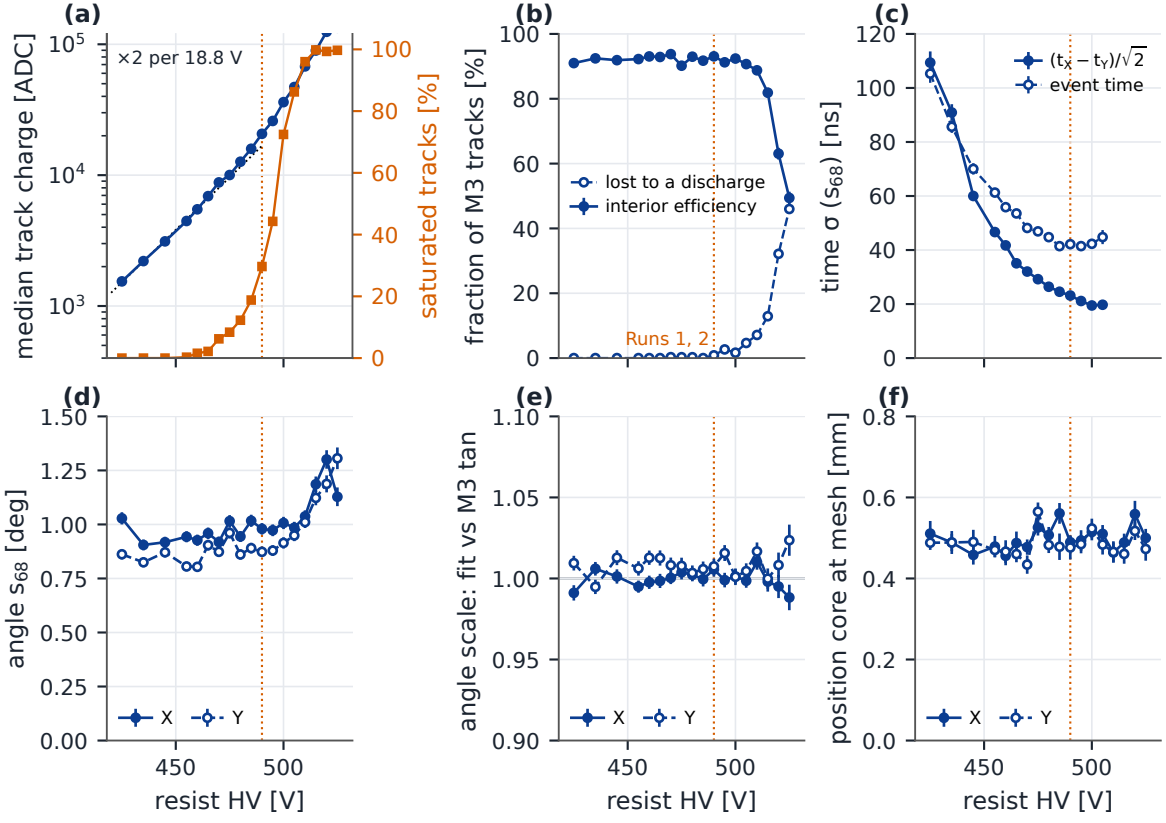
(a)
median track charge [ADC]
saturated tracks [%]
×2 per 18.8 V
(b)
fraction of M3 tracks [%]
lost to a discharge
interior efficiency
Runs 1, 2
(c)
time σ (s_{68}) [ns]
$(t_X - t_Y)/\sqrt{2}$
event time
(d)
angle s_{68} [deg]
X
Y
resist HV [V]
(e)
angle scale: fit vs M3 tan
X
Y
resist HV [V]
(f)
position core at mesh [mm]
X
Y
resist HV [V]