
组装文档

设计标题：Untitled.scene
修订版本：
审核：
设计师：
公司：
地址：
电子邮箱：
电话：
日期：2026-10-19

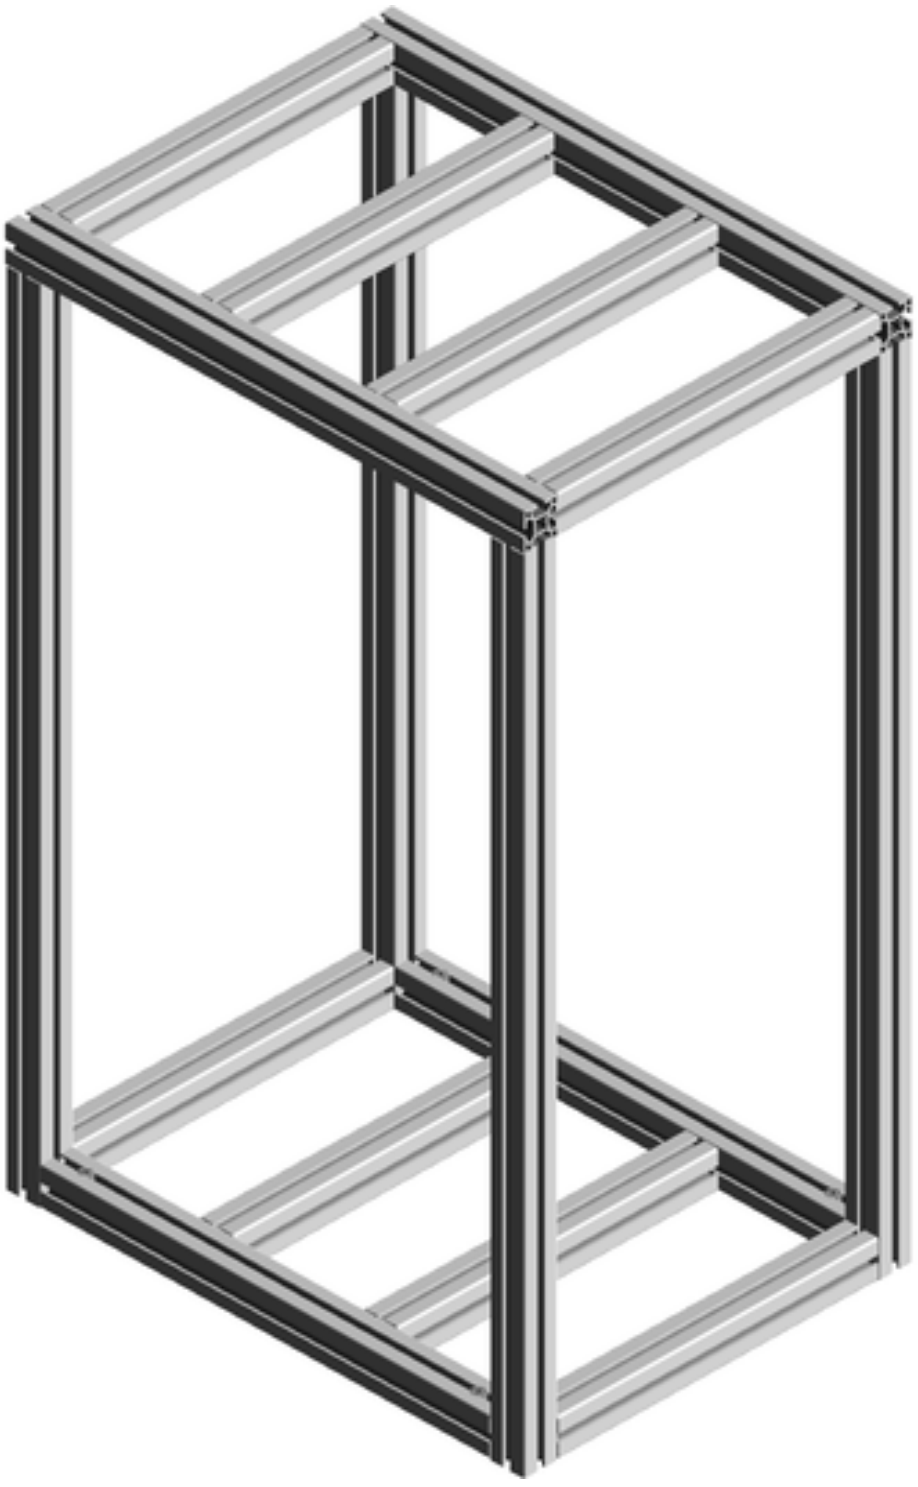

物料清单（套件数量：1）

位置	零件号	描述	单位	数量
1	1.11.040040.43LP-AA4AA4/520	Profile 40x40, 4E, light, plain	MM	2
2	1.11.040040.43LP-A00A00/600	Profile 40x40, 4E, light, plain	MM	2
3	1.11.040040.43LP-AA4A00/860	Profile 40x40, 4E, light, plain	MM	4
4	1.11.040040.43LP-AA4AA4/370	Profile 40x40, 4E, light, plain	MM	8
5	1.21.4E0	Connector, universal	EA	24

总重量： 13.44 kg (29.63 lbs)

原创汉化网址：新贵工作室


等距视图

部分配件可能无法显示




原创汉化网址：新贵工作室


多角度视图

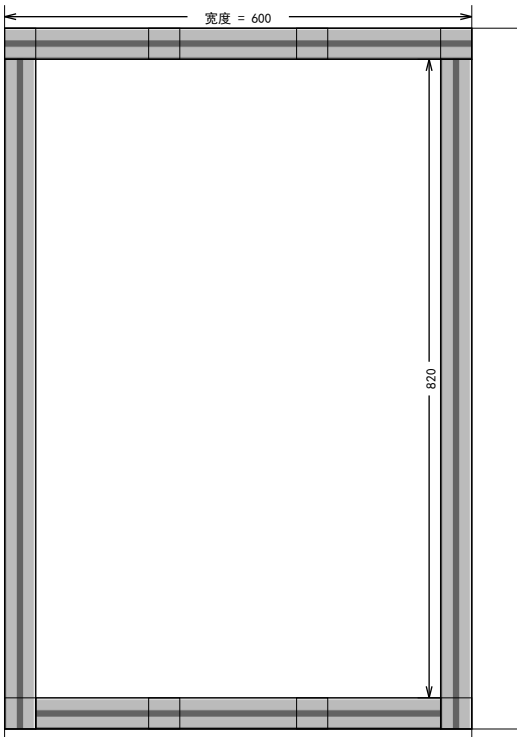


前视图

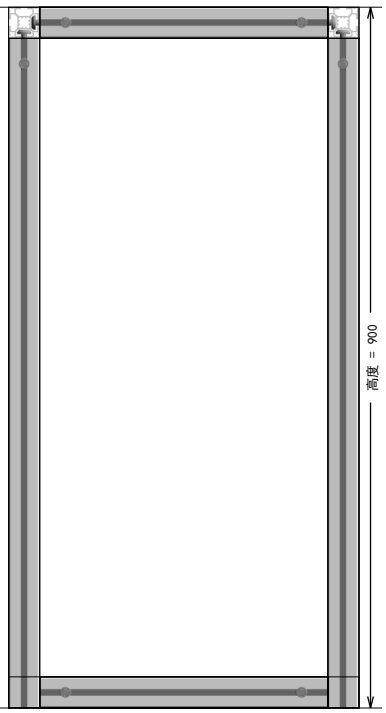

左视图

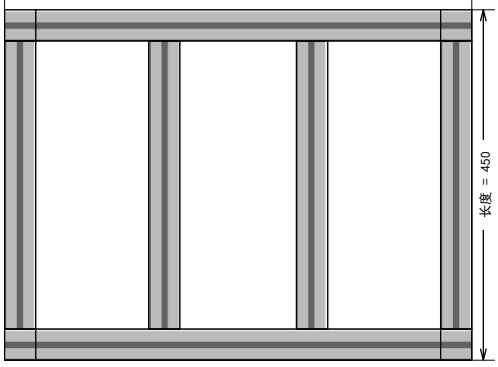

顶视图

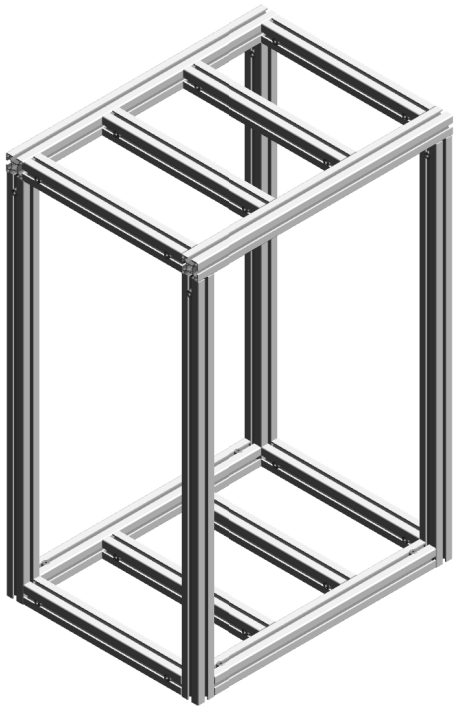

等距视图

原创汉化网址：新贵工作室

设计标题：Untitled.scene
设计师：
日期：2026-10-19

立体装配图





原创汉化网址：新贵工作室

组装列表

位置	零件号	描述	相关零件	数量
1	1.11.040040.43LP-AA4AA4/520	Profile 40x40, 4E, light, plain		
			1.21.4E0. Connector, universal	4
3	1.11.040040.43LP-AA4A00/860	Profile 40x40, 4E, light, plain		
			1.21.4E0. Connector, universal	4
4	1.11.040040.43LP-AA4AA4/370	Profile 40x40, 4E, light, plain		
			1.21.4E0. Connector, universal	16

原创汉化网址：新贵工作室

MayTec® Connectors for profiles with core hole-Ø 12 mm 1.21.4E0

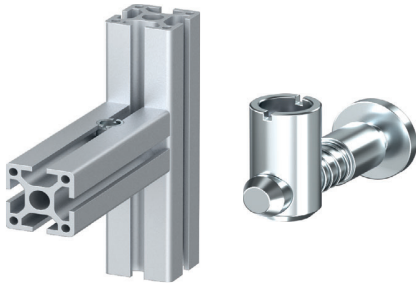Connection	Connector	Finished dimension	PG	Article-No. for connector with E-head		
				steel		VA
				standard	E	
Universal			40	1.21.4E0	E	V

Connector types and materials

Technical data				
Connector	Article-No.	Material	Strength	Surface
Standard ground	1.21.4E0 1.21.4E0 E	steel	≥ 650 N/mm²	galvanised
Standard VA	1.21.4E0 V	stainless steel 1.4305	490 - 685 N/mm²	pickled and passivated


Strength values for profile connections with MayTec-Connectors

Torque tightening values for connector setscrew

PG	Slot	Setscrew special execution	Torque value recommended	Torque value max.
40	E	M10×12	30.0 Nm	40.0 Nm

Comments
The max. tightening values are only valid for the MayTec setscrew and can not be reached by the usual commercial quality standard.


Tension load




PG	Slot	Connector	max. Tensile strength
40	E	Universal	12,000 N

Comments
All values given have been tested with pretension of the connectors and maximum torque value and refer to the connection of two identical profiles.

Slide load



Flexure load




PG	Slot	Profile	Pcs	max. Slide strength		max. Flexure strength		
				Connector, Universal				
					E-connector	□	▭	▯
40	E	40×40 40×80 80×80, 8E	1 2 4	6,000 N 12,000 N 24,000 N	9,000 N 18,000 N 36,000 N	250 Nm 2,000 Nm	500 Nm	1,000 Nm

The listed values are valid for all light and heavy profiles

E = ground-connector, VA = stainless steel 1.4305


原创汉化网址：新贵工作室

推荐的铝型材切割 （包含切口：3.5 mm）

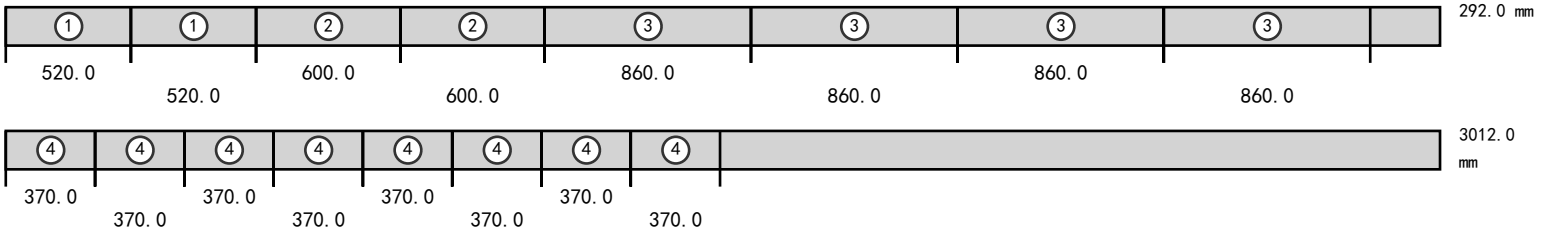
零件号	切割顺序	剩余长度mm
1.11.040040.43LP		

组装提示


CONNECTOR	1.21.4E0	Connector, universal




Insert the cross bushing



Push in the anchor



Pretension the anchor



Comments
For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side

大多数 MayTec
连接件都遵循这些组装步骤。紧固扭矩：
20mm铝型材为 5-15 Nm,
30mm铝型材为 30 Nm,
40mm 及以上铝型材为 35 Nm。

原创汉化网址：新贵工作室