

**FLOODSENSE: AN ANDROID-BASED EXPERT SYSTEM FOR FLOOD
SUSCEPTIBILITY ASSESSMENT AND PRE-EVENT PREPAREDNESS IN
BACOR CITY**

Undergraduate Thesis
Submitted to the Faculty of the
Department of Computer Studies
Cavite State University - Bacoor City Campus
City of Bacoor, Cavite

In partial fulfillment of the
requirements for the degree
Bachelor of Science in Computer Science

**REYMART V. GOC-ONG
MARTIN LORENZ D. JUANITES
ROMAR T. PULAO**
May 2027

**FloodSense: An Android-Based Expert System for Flood Susceptibility
Assessment and Pre-Event Preparedness in Bacoor City**

**Reymart V. Goc-ong
Martin Lorenz D. Juanites
Romar T. Pulao**

An undergraduate thesis manuscript submitted to the faculty of the Department of Computer Studies, Cavite State University - Bacoor City Campus, City of Bacoor, Cavite, in partial fulfillment of the requirements for the degree of Bachelor of Science in Computer Science with Contribution No. _____. Prepared under the supervision of

INTRODUCTION

Flooding is one of the most frequent and destructive natural hazards in the Philippines. The country's location within the typhoon belt exposes communities to rainfall events that cause inundation, displacement, damage to property, interruption of livelihood, and loss of life. National disaster statistics continue to document the widespread effects of natural hazards on Filipino families and communities (Philippine Statistics Authority [PSA], 2026). Bacoor City, Cavite, is among the localities that regularly experience flooding. Its low-lying areas and connection to the Imus and Bacoor river systems contribute to persistent inundation during periods of heavy rainfall. Flood-mitigation facilities in the Imus River Basin were established specifically to reduce peak floodwater volume in Cavite, including low portions of Bacoor and its tributaries (Japan International Cooperation Agency [JICA], 2021). These conditions establish the importance of accessible, understandable, and location-specific information that residents can consult before a flood event develops.

To assess the information problem, the researchers surveyed 50 residents across 12 barangays in Bacoor City, with respondents drawn largely from historically flood-affected communities. The findings revealed that flood warnings are commonly disseminated through Short Message Service (SMS), social media, and barangay public-address systems, yet these channels do not consistently provide location-specific susceptibility information before flooding occurs. Only 20% of respondents felt well-informed about which areas in the city are flood-prone, meaning that 80% selected Somewhat Aware, Not Sure, or Not Aware at All. Most respondents also rated the timeliness, clarity, and quality of available flood information near the dissatisfied end of the scale. Most critically, 64% reported making a wrong decision, such as taking a flooded road, delaying evacuation, or misjudging flood conditions, because adequate area-specific information was unavailable. A key informant interview with the Bacoor Disaster Risk Reduction and Management Office (BDRMO) confirmed that historical flood records and Geographic Information System (GIS)-based exposure information

are maintained institutionally but are not presented to residents through an interactive public platform. A supplementary interview with the City Planning and Development Coordinator Office (CPDCO) also established the availability of elevation, flood hazard, land-use, and barangay-boundary information relevant to geographic assessment.

FloodSense addresses this gap through an Android application that connects expert-provided and expert-validated knowledge with the information and preparedness needs of Bacoar City residents. A Rule-Based Expert System organizes approved facts and conditional rules in a knowledge base and applies an inference process to the user's selected rainfall intensity, rainfall duration, and geographic area. Rule-based expert systems use a knowledge base and an inference procedure that applies rules to known facts to reach a conclusion (Buchanan & Shortliffe, 1984). In FloodSense, the conclusion is an explainable flood susceptibility assessment expressed as Low, Moderate, High, or Very High. The Decision Support System (DSS) then uses the assessment together with the user's situational inputs to present suitable pre-event preparedness guidance. This function supports, but does not make, the user's final decision; decision support systems organize relevant information and structured guidance for human decision-making (Power, 2002).

The current FloodSense prototype presents scenario-based susceptibility assessment through an interactive map. The user selects or confirms a hypothetical rainfall intensity and duration, selects a supported location manually or through an optional one-time foreground location request, and explicitly requests an assessment. The map can display demonstration susceptibility zones and a neutral reference layer representing the 47 current barangay identities; the reference layer is technically validated for geometry but is not City-issued, is not City-verified, and contains no flood-susceptibility facts. The custom Web Administration System currently provides authenticated dashboard access, read-only review of map and rainfall-reference data, parameter-governance views, and controlled workflows for Decision Support System content, evacuation-center records, source records, and audit history. Ordinary

administrators do not edit raw Expert System rules, priorities, conflict-resolution logic, or algorithm code. A fixed-schema CSV export-and-import workflow for permitted values is a confirmed requirement, but it is not yet implemented. FloodSense does not provide real-time monitoring, official forecasting, autonomous alerts, or automatic evacuation orders.

Statement of the Problem

This study aimed to develop an Android application that provides location-specific flood susceptibility assessment and pre-event preparedness support for Bacoor City through a Rule-Based Expert System, a Decision Support System, and a dynamic geographic map. The research questions were grounded in the survey of 50 residents across 12 barangays, key informant interviews with the BDRRMO and CPDCO, and a review of related literature and official information. These sources were used to establish community needs, institutional knowledge sources, geographic requirements, rainfall parameters, preparedness content, and the functional boundaries of the proposed application and its Web Administration System.

In Bacoor City, flooding is a persistent and consequential reality. Survey results reveal that 92% of respondents have personally experienced flooding, with 58% describing the flooding as severe or waist-deep and higher. Despite this exposure, only 20% consider themselves well-informed about flood-prone areas. Mean satisfaction scores for information quality, timeliness, and clarity ranged from 2.62 to 2.72 on a 5-point scale, clustering at the lower end of the Neutral range and tending toward dissatisfaction. These information deficiencies have direct consequences: 64% of respondents reported making wrong decisions due to insufficient flood information, including taking flooded routes, failing to evacuate on time, and misjudging conditions. Open-ended responses further identified late or delayed information at 26% and insufficient or absent location-specific warnings at 20% as the leading concerns. How can an Android application using an Expert System provide residents with

understandable, location-specific flood susceptibility assessments based on expert-validated knowledge, rainfall scenarios, and geographic information?

The problem also concerns the accessibility and operational maintenance of institutional knowledge. The BDRRMO maintains historical flood records, exposure information, preparedness protocols, and evacuation-center information, while the CPDCO maintains geographic and planning data. Current dissemination practices, including social media, email, and barangay coordination, do not fully address the public's need for on-demand, situation-specific guidance. A community-facing platform must therefore communicate approved information while ensuring that rules, map objects, preparedness content, rainfall parameters, data sources, and administrative accounts can be maintained by authorized personnel. How can a Rule-Based Expert System, dynamic GIS-style map, Decision Support System, and Web Administration System organize this institutional knowledge into an explainable assessment and appropriate pre-event preparedness guidance for Bacoar City residents?

Taken together, these gaps reveal a disconnect between institutional flood knowledge and the decisions residents must make before flooding occurs. The overarching question of the study is: How can FloodSense integrate expert-provided and expert-validated knowledge, rule-based inference, scenario-based rainfall input, interactive geographic visualization, Check My Area, evacuation-center information, and structured decision support to strengthen flood susceptibility awareness and pre-event preparedness in Bacoar City, while remaining a complementary public-information tool that does not perform real-time flood prediction or supersede official warnings?

Objectives of the Study

Generally, the study aimed to develop an Android application that uses a Rule-Based Expert System to assess flood susceptibility and a Decision Support System to provide pre-event preparedness support for residents of Bacoar City through

explainable expert knowledge, rainfall scenarios, and dynamic geographic visualization.

Specifically, it aimed to:

1. identify the prevailing challenges, pain points, and needs of Bacoor City residents and relevant local government offices concerning flood information access, timeliness, clarity, location-specific awareness, and pre-event decision-making through a structured survey of 50 respondents across 12 barangays, a key informant interview with the Bacoor Disaster Risk Reduction and Management Office (BDRRMO) to validate survey findings and assess institutional knowledge and data availability, and a supplementary key informant interview with the City Planning and Development Coordinator Office (CPDCO) to identify available geographic, elevation, flood-hazard, land-use, and barangay-boundary information, all conducted during the Empathize phase of the Design Thinking methodology;
2. analyze expert-provided and expert-validated flood knowledge, BDRRMO historical flood records and preparedness protocols, CPDCO geographic information, PAGASA rainfall classifications, evacuation-center information, and user situational requirements to determine the facts, conditional rules, susceptibility levels, rainfall parameters, geographic entities, and DSS content required by the knowledge base and inference process;
3. develop an Android application using Flutter and Dart, supported by Django, Django REST Framework, GeoDjango, and PostgreSQL/PostGIS, that integrates a deterministic Rule-Based Expert System, scenario-based rainfall input, an interactive GIS-style map, manual location selection, optional one-time foreground location, explainable susceptibility output, and separate Decision Support

System guidance; provide a custom Web Administration System for authorized review and maintenance of permitted content and records; protect raw Expert System rules and algorithm logic from ordinary administrator editing; and establish a fixed-schema CSV exchange requirement for permitted values without representing that requirement as operational until its routes, validation, interface, integration, and tests are completed;

4. test the system's core modules by implementing unit testing, integration testing, system testing, rule and inference validation, application programming interface communication testing, spatial-query testing, database-operation testing, map interaction testing, DSS decision-flow testing, role-based administrative testing, and end-to-end validation to ensure that susceptibility assessment, geographic selection, dynamic visualization, preparedness guidance, and administrative data management operate accurately and consistently;
5. evaluate the system's overall level of user satisfaction in terms of accessibility, reliability, usability, security, maintainability, and portability of the system using ISO/IEC 25010.

Theoretical Framework

The theoretical framework of FLOODSENSE: AN ANDROID-BASED EXPERT SYSTEM FOR FLOOD SUSCEPTIBILITY ASSESSMENT AND PRE-EVENT PREPAREDNESS IN BACOR CITY illustrates how a Rule-Based Expert System, a dynamic Geographic Information System map, and a separate Decision Support System are integrated into an Android and web platform to provide location-specific flood susceptibility information and pre-event preparedness support to residents of Bacoor City. Approved institutional data and expert-validated knowledge are managed through the Django Web Administration System and stored in PostgreSQL with PostGIS. The Flutter Android application communicates with the Django backend

through secured application programming interfaces to request assessments, maps, explanations, preparedness guidance, and verified evacuation resources. The framework keeps susceptibility classification, preparedness guidance, spatial visualization, and administrative publishing as coordinated but clearly defined functions.

Authentication and Onboarding Module. This module manages resident registration and login using an email address and password. The Django backend verifies credentials, applies password rules, supports email-based password recovery, and issues the session or token required for protected mobile requests. A user's local application state cannot grant administrator privileges because every protected action is checked on the server. During first launch, the onboarding screen explains the purpose of FloodSense, the rainfall controls, map legend, susceptibility meanings, Check My Area procedure, Decision Support System role, data date or version, privacy information, and safety disclaimer. The disclaimer emphasizes that the application provides scenario-based susceptibility and preparedness information rather than a live flood forecast or official warning.

PAGASA-Aligned Rainfall and Location Input Module. This module allows the resident to define the assessment scenario through plain-language rainfall intensity and duration selections. The baseline intensity labels are Light, Moderate, Heavy, Intense, and Torrential, while the supported durations may include 1, 3, 6, 12, and 24 hours. The internal thresholds and wording must follow the final PAGASA reference approved for the study. The resident may select a supported area from the map or manually place a pin through Check My Area. The selected rainfall values and location are planning inputs for the current request; they do not prove current weather conditions or the resident's actual physical location. Unsupported combinations produce a limitation response instead of an assumed classification.

Web Administration and Knowledge Management Module. This module is the controlled maintenance workspace used by authorized administrators. It manages

geographic zones and map features, rainfall parameters, Expert System facts and rules, Decision Support System questions and branches, evacuation-center records, public explanations and disclaimers, source and provenance information, and permitted user-support actions. Institutional materials from BDRRMO, CPDCO, PAGASA, and other approved providers are entered or imported as controlled records and are associated with their source, review status, effective date, and version. Critical changes follow the sequence Draft, Validation, Review, Approval, and Publication. Published versions remain available for audit or rollback, and incomplete or unapproved records are not released to residents.

Django REST and GeoDjango Processing Module. This module provides the controlled connection between the Android application, administrative workspace, processing services, and database. Django handles server-side authentication, permissions, validation, business logic, and administrative functions. Django REST Framework receives and returns secured JSON and GeoJSON data for the mobile application. GeoDjango provides the spatial models and operations used to store and query polygons and points. When Check My Area submits a coordinate, GeoDjango and PostGIS perform a point-in-polygon query and return the most specific supported zone. Neither the Android application nor the administrator's browser connects directly to the database; all operations pass through the controlled Django services.

Rule-Based Expert System Assessment Module. This module implements a deterministic Rule-Based Expert System. In rule-based expert-system theory, a knowledge base stores domain knowledge and an inference procedure applies rules to known facts to reach a conclusion (Buchanan & Shortliffe, 1984). FloodSense represents approved knowledge through geographic-zone facts, rainfall categories and durations, decision tables, structured IF-THEN rules, exceptions, priorities, sources, versions, and explanation text. Forward chaining begins with the resolved zone, rainfall scenario, active zone profile, and published rule set; it tests conditions and fires the applicable rules. The primary outputs are Low, Moderate, High, and Very

High. Conflicting rules may return Uncertain, missing coverage may return Insufficient Data, and a point beyond approved boundaries returns Outside Supported Area.

Dynamic GIS Map and Check My Area Module. This module presents approved Bacoor City spatial data through a movable map rendered in Flutter using `flutter_map`. Residents can pan, zoom, tap supported zones, open information pop-ups, display map layers, read a text-supported color legend, view evacuation-center markers, and reposition the Check My Area pin. Supported polygons are colored Low in green, Moderate in yellow, High in orange, or Very High in red based on the current Expert System result. Changing the rainfall scenario causes the same approved polygons to be evaluated and recolored. Map precision is limited to the resolution of the approved boundary and zone data, and administrators cannot assign a public susceptibility class merely by painting a polygon color.

Results Summary and Explainable Result Module. This module presents the assessment in both summary and detailed form. The Results Summary lists supported areas with their current susceptibility badges and may allow searching or filtering by barangay or class. The detailed result identifies the resolved area, parent barangay, rainfall intensity and duration, susceptibility class, plain-language meaning, matched rule or decision-table basis, summarized conditions, source and version information, update date, and any limitation state. The same zone, scenario, and published rule version must produce the same result on the map, in Check My Area, and in the context given to the Decision Support System. A result is marked outdated when its scenario, location, or controlling version changes.

Decision Support System Module. This module provides pre-event preparedness guidance through a deterministic, database-driven decision tree. Decision support systems organize relevant information and structured guidance to assist human decision-making (Power, 2002). FloodSense begins with the latest valid Expert System result as read-only context and combines it with the resident's answers to approved situational questions. The configured path may provide guidance

concerning go-bag preparation, family communication, protection of documents and valuables, assistance for vulnerable household members, monitoring of official advisories, and evacuation readiness. The DSS is separate from the Expert System: it does not change the susceptibility class, predict live conditions, or issue an independent evacuation order.

Verified Evacuation Center Resource Module. This module displays only active evacuation-center records that have been verified from BDRRMO or another authorized city source. Each center is stored as a geographic point and may include its name, barangay, address, responsible office, verification status, validation date, and other information approved for public display. PostGIS can rank centers by straight-line geographic distance from the resident's selected pin, and the Android application can open the selected coordinates in an installed navigation application. A nearby ranking or external route does not guarantee that a road is safe or passable, that a center is currently open or has available capacity, or that the suggested route is appropriate during an actual emergency.

User Account and Preferences Module. This module allows authenticated residents to view or update approved profile and convenience information, including their display name, email address, home barangay, optional default rainfall scenario, password actions, privacy information, and logout. Passwords are securely processed by Django and are never shown to administrators in plain text. A manually placed Check My Area coordinate and DSS answers are used to complete the requested operation and are not retained as continuous location or behavior history by default. Resident accounts do not permit editing of Expert System rules, Decision Support System content, official map geometry, rainfall references, or evacuation-center records.

PostgreSQL and PostGIS Database Module. All authoritative relational and spatial records are stored in PostgreSQL with the PostGIS extension. The database contains users and roles, rainfall references, barangays and susceptibility zones,

geographic profiles, evacuation-center points, Expert System rules and conditions, Decision Support System nodes and branches, source and review metadata, published versions, and audit history. PostgreSQL enforces relational consistency, while PostGIS supports point-in-polygon and straight-line distance operations. The backend retrieves only the compatible active versions required for a request and returns only public approved data to residents. Internet access is required for fresh synchronization and server-side evaluation; any approved cached information must display its date and version when connectivity is unavailable.

Overall, the framework demonstrates how expert-validated knowledge, structured rule-based inference, geographic processing, explainable results, and a separate preparedness decision tree are combined in one community-accessible system. By converting approved institutional records and expert knowledge into a controlled mobile and web service, FloodSense aims to strengthen location-specific flood susceptibility awareness and support better pre-event preparation without replacing the authority of BDRRMO, PAGASA, barangay officials, or emergency responders.

The diagram presents FloodSense through a top-to-bottom organization. The Internet connection appears above the FloodSense system, the resident and administrator actors appear on the left, approved institutional sources and external display services appear on the right, and the authoritative PostgreSQL/PostGIS database appears below. The stacked modules inside the system boundary show the functions that process user inputs, institutional knowledge, susceptibility rules, spatial data, results, preparedness guidance, evacuation resources, and account information.

System Architecture

The system architecture uses a vertical client-server presentation of the approved FloodSense design. Resident requests enter through authentication, rainfall and location input, and the secured Django service layer. Institutional data and expert review enter through the Web Administration and Knowledge Management Module.

The Rule-Based Expert System produces the susceptibility result, which is used by the map and explanation modules and passed as read-only context to the separate DSS. The database stores the controlled relational and spatial records, while basemap and navigation services are used only for display and external directions.

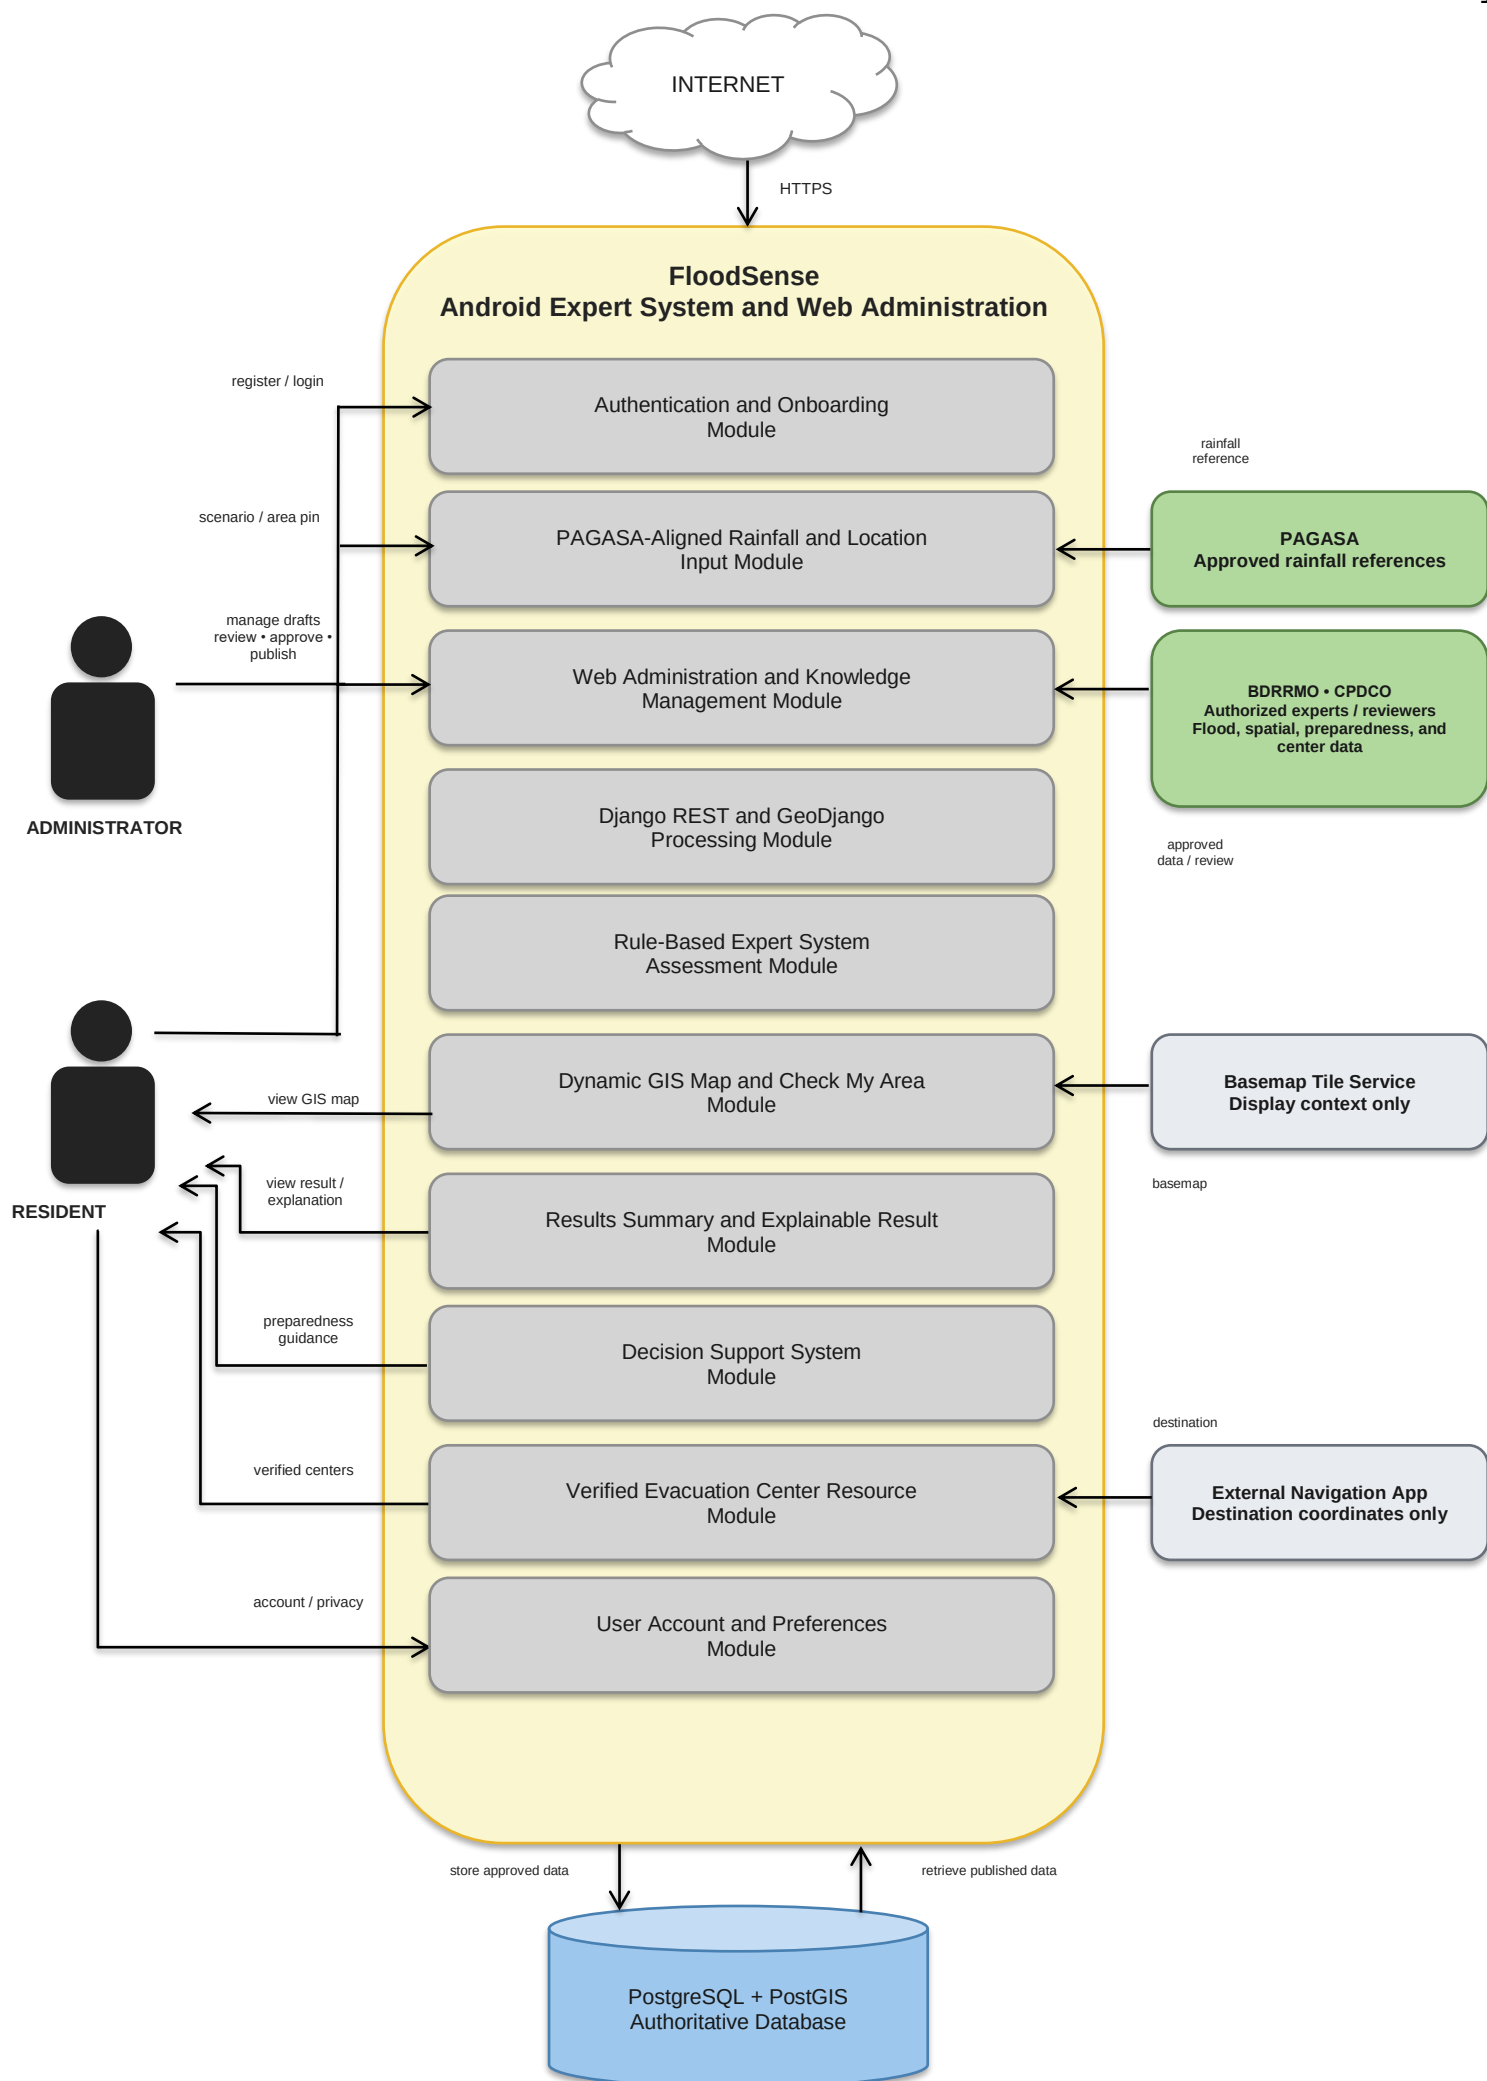


Figure 1. Revised System Architecture of FloodSense.

Significance of the Study

The development of FloodSense addresses a critical gap in flood information dissemination by translating expert-provided and expert-validated knowledge, institutional geographic information, and rainfall scenarios into an accessible susceptibility assessment, dynamic map, and pre-event preparedness support. The following stakeholders stand to benefit directly from the study.

For the Bacoor Disaster Risk Reduction and Management Office (BDRRMO). The study provides a prototype channel through which validated susceptibility information and pre-event preparedness guidance may eventually be communicated to residents. The custom Web Administration System currently supports controlled management of DSS guidance, evacuation-center records, source information, and audit history, together with read-only review of map, rainfall-reference, and parameter records. Ordinary administrators are not permitted to rewrite raw Expert System rules or inference logic. The proposed fixed-schema CSV workflow will permit only validated values within system-required fields after implementation and authorization. These functions complement rather than replace official advisories, warnings, and emergency directives.

For the City Planning and Development Coordinator Office - Bacoor (CPDCO). The study demonstrates a practical community use for geographic and planning information maintained by the office, including elevation, flood-hazard, land-use, and barangay-boundary data. The integration of verified geographic records into spatial polygons, point locations, and area-selection functions illustrates how institutional planning information can support public understanding of flood susceptibility without presenting FloodSense as a substitute for official technical maps.

For residents of historically flood-affected barangays. The Android application directly responds to the information deficits identified in the survey: 92% of respondents experienced flooding, only 20% felt well-informed about flood-prone areas, and 64% reported wrong decisions associated with insufficient information.

Residents can select a rainfall scenario, pan and zoom the dynamic map, inspect color-coded susceptibility polygons, use Check My Area, view verified evacuation-center locations, and receive preparedness guidance suited to the susceptibility result and their stated situation. Plain-language rainfall categories reduce the need to interpret technical meteorological measurements, while the disclaimer directs users to continue following BDRMO and PAGASA advisories.

For future researchers. The study provides a locally grounded reference for combining knowledge engineering, rule-based inference, decision support, and geographic information in an Android disaster-preparedness application. The documented approach to expert knowledge acquisition, rule validation, spatial data management, dynamic map interaction, administrative maintenance, software testing, and ISO/IEC 25010 evaluation can inform related studies in other flood-prone communities, subject to validation with local experts, datasets, and user populations.

Time and Place of the Study

The research and development of the FloodSense application were conducted using the Design Thinking methodology, beginning with data-gathering activities before the formal study period. The official duration of the study spans from September 2026 to May 2027. Major activities, including requirements analysis, knowledge acquisition, rule structuring, system design, mobile and web development, geographic data preparation, testing, evaluation, and documentation, were carried out at the Department of Computer Studies, Cavite State University - Bacoar City Campus, located in Soldiers Hills IV, Molino, Bacoar City, Cavite. The campus served as the primary venue for software development, academic consultation, integration testing, and preparation of the research manuscript.

Initial data gathering commenced in early May 2026 during the Empathize phase of Design Thinking. A structured survey was administered to 50 residents across 12 barangays in Bacoar City, many of which have historically experienced flooding, from May 5 to May 12, 2026, to capture prevailing challenges in flood information

access, timeliness, clarity, and decision-making. On May 12, 2026, a key informant interview was conducted at the Bacoor Disaster Risk Reduction and Management Office (BDRRMO), located at the City of Bacoor Legislative and Disaster Resilience Building, Bacoor Government Center, Barangay Bayanan, Bacoor City. The interview aimed to validate survey findings, understand the office's workflows and information holdings, and assess the feasibility of a community-facing flood susceptibility and preparedness tool. A supplementary key informant interview was conducted on May 18, 2026 with the Officer-in-Charge of the Bacoor City Planning and Development Coordinator Office (CPDCO), located at the Bacoor Government Center, Barangay Bayanan, Bacoor City. The interview confirmed the availability of elevation maps, flood-hazard maps, land-use maps, and barangay-boundary maps and established the geographic context needed for the study. The outputs of the Empathize phase guided the identification of system requirements and the sources to be subjected to expert validation.

Following data gathering, the study proceeds through the Define, Ideate, Prototype, and Test phases within the research timeline. Requirements, interface wireframes, geographic data structures, susceptibility rules, DSS content, mobile screens, and Web Administration System functions are refined through consultations and development evidence. Final resident evaluation and system-quality analysis remain future activities. Results will be reported only after the approved instrument, sampling procedure, completed responses, and analysis are available.

Scope and Limitation of the Study

The study develops FloodSense as a scenario-based, pre-event flood-susceptibility assessment and preparedness-support system for Bacoor City. Its deterministic Rule-Based Expert System evaluates a user-confirmed rainfall scenario and supported location, while the separate Decision Support System presents published preparedness guidance without changing the susceptibility result. The current prototype produces Low, Moderate, High, or Very High demonstration outputs

and explanations. Operational use remains blocked until approved local susceptibility data, validated parameters, and institutional authorization are available. FloodSense does not provide real-time flood monitoring, official forecasts, warnings, evacuation orders, or safety guarantees.

The primary intended users of the Android application are Bacoor City residents. In the current mobile flow, a resident selects Light, Moderate, Heavy, Intense, or Torrential rainfall and a duration of 1, 3, 6, 12, or 24 hours, confirms the hypothetical scenario, selects or confirms a location, and explicitly requests an assessment. Resident registration, login, persistent profiles, and assessment history are not exposed in the current interface and remain unimplemented for the intended user flow.

The interactive map is limited to supported Bacoor City reference and demonstration data. It can pan and zoom, display scenario-dependent demonstration colors, accept manual area selection, and show a neutral 47-barangay administrative reference boundary. The boundary layer represents current barangay identities through a documented derivation and has passed technical geometry checks, but it is not automatically City-issued or City-verified and contains no flood-susceptibility facts. The map does not display live flood extent, water depth, traffic conditions, road closures, river level, center occupancy, or satellite rainfall imagery.

Location functions allow the user to select an area manually, place or adjust a map pin, or request the device's location once while the application is in the foreground. The application can propose a barangay from the coordinate and requires the user to confirm or correct it before assessment. The coordinate is used for the active request and is not continuously collected in the background. The current function does not find safe routes, verify road passability, or continuously track the resident.

The backend and custom Admin portal include an evacuation-center record workflow. This capability does not yet expose resident-facing nearby-center discovery, distance ranking, live capacity, operating status, or safe-route guidance. Any future

resident display must rely on authorized and current records and must direct users to confirm emergency instructions through official channels.

The Decision Support System is confined to pre-event preparedness and remains separate from the susceptibility assessment. The current implementation can return published guidance associated with the assessment context. A resident-facing structured multi-question decision tree has not been verified as complete. The DSS does not alter the susceptibility class, issue autonomous evacuation orders, diagnose conditions, guarantee safety, or make the resident's final decision.

A separate custom Web Administration System provides authenticated access to a dashboard, read-only map-data and rainfall-reference review, parameter-governance views, and workflows for DSS content, evacuation-center records, data sources, and audit history. Ordinary administrators cannot directly edit raw Expert System rules, rule conditions, priorities, conflict-resolution logic, or the algorithm. Technical Django Admin remains a separate developer or research-maintenance interface. The confirmed fixed-schema CSV export-and-import workflow is not yet operational and will require routes, services, schema and value validation, interface controls, permissions, integration, and tests before it can be described as implemented.

The implementation stack uses Flutter and Dart for the mobile application; flutter_map for resident-facing mapping; Python Django and Django REST Framework for backend services and REST interfaces; GeoDjango for geographic operations; PostgreSQL with PostGIS for relational and spatial records; and Django templates with Leaflet for the custom administrative interface. The current prototype requires network access for integrated server functions. iOS support, fully offline operation, live sensors, automated meteorological feeds, background polling, background GPS tracking, emergency dispatch, and machine-learning prediction are outside the current scope.

The reliability of any susceptibility assessment depends on the completeness, geographic resolution, provenance, institutional approval, and expert validation of the

data and knowledge used. No approved operational susceptibility dataset is currently present in the repository. The available 47-barangay layer is an administrative reference only, while provisional research materials remain unvalidated or restricted. Demonstration results must therefore not be presented as official Bacoar City flood-hazard information.

Data privacy and security are addressed in accordance with Republic Act No. 10173, or the Data Privacy Act of 2012. The current location flow requests foreground permission only when the user chooses the location function, uses the coordinate for the active request, permits confirmation or correction of the detected barangay, and does not implement continuous background location tracking. Administrative functions require authenticated and authorized access. Evaluation findings will not be generalized until valid survey and system-evaluation data are available.

Definition of Terms

The following terms are defined operationally as they are used in this study to ensure clarity and consistency throughout the research:

Android Application. The resident-facing FloodSense software developed with Flutter. Its current interface supports scenario selection and confirmation, manual or one-time foreground location input, barangay confirmation or correction, assessment requests, map presentation, susceptibility results, explanations, and preparedness guidance. Resident accounts, assessment history, notifications, and offline operation are not currently exposed.

Check My Area. The location-selection flow that allows manual area selection, placement or adjustment of a map pin, and an optional one-time foreground location request. A detected barangay is proposed for user confirmation or correction before assessment; the function does not continuously track the device.

Color-Coded Susceptibility Levels. The visual scheme used on the dynamic map in which green indicates Low, yellow indicates Moderate, orange indicates High, and red indicates Very High flood susceptibility for the active scenario.

CPDCO (City Planning and Development Coordinator Office). The Bacoar City office that maintains planning and geographic information, including elevation, land-use, flood-hazard, and barangay-boundary materials relevant to the study.

Decision Support System (DSS). The component separate from the Rule-Based Expert System that presents published pre-event preparedness guidance using the assessment context. It does not change the susceptibility result, issue an official warning or evacuation order, or make the user's final decision.

Dynamic Map. The interactive map that supports panning, zooming, scenario-dependent demonstration coloring, manual area selection, map-pin placement, and display of the neutral 47-barangay reference layer. The reference boundary is not an official flood-hazard dataset.

Expert-Provided and Expert-Validated Knowledge. Flood-related facts, parameters, rules, preparedness guidance, and supporting information that have been supplied or reviewed by an authorized source and recorded with adequate provenance. Repository presence or technical validation alone does not establish institutional approval.

Expert System. A knowledge-based computer system that applies stored facts and conditional rules through an inference process. In FloodSense, it produces an explainable susceptibility class for a supported geographic area and rainfall scenario.

Flood Susceptibility. The relative potential of a supported geographic area to experience rainfall-related flooding under a user-confirmed scenario. The current prototype demonstrates Low, Moderate, High, or Very High outputs but does not yet contain an approved operational Bacoar City susceptibility dataset and is not a real-time prediction.

Geographic Information System (GIS). A system for organizing, analyzing, and presenting information associated with geographic locations. FloodSense uses GIS functions for polygons, points, containment queries, interactive visualization, and evacuation-center locations.

GeoDjango. The geographic extension of Django used by FloodSense to represent spatial data and perform geographic operations between backend services and the PostGIS database.

Inference Process. The procedure that matches facts from the selected rainfall scenario and geographic area against validated rules in the knowledge base to derive a susceptibility conclusion and supporting explanation.

Knowledge Base. The structured collection of expert-validated facts, conditional rules, geographic attributes, rainfall parameters, susceptibility categories, and related provenance used by the Expert System.

PAGASA-Aligned Rainfall Input. The current interface labels for Light, Moderate, Heavy, Intense, and Torrential rainfall and durations of 1, 3, 6, 12, or 24 hours. These selections are hypothetical scenario inputs. Their operational thresholds and use require authoritative source confirmation and validation before official deployment.

PostGIS. The spatial extension of PostgreSQL used to store and query FloodSense geographic polygons, points, boundaries, selected locations, and evacuation-center coordinates.

Preparedness Provenance. Information identifying the source, validation status, responsible actor, relevant date, and version of a preparedness item or related record. Provenance permits users and administrators to distinguish approved, provisional, and unsupported information.

Rainfall Parameters. The supported combination of rainfall intensity and duration selected by the user and applied as scenario facts during Expert System assessment.

Rule-Based Expert System. An Expert System in which domain knowledge is represented as conditional rules. FloodSense evaluates applicable rules against known scenario and geographic facts to produce a susceptibility assessment.

Web Administration System. The custom browser-based interface used by authorized administrators for the dashboard, read-only map and rainfall-reference review, parameter governance, DSS-content management, evacuation-center management, data-source management, and audit history. It does not expose raw rule editing. The separate technical Django Admin is reserved for developer or research maintenance. Fixed-schema CSV export and import is a confirmed but currently unimplemented requirement.

REVIEW OF RELATED LITERATURE

This chapter reviews current literature and studies relevant to the FloodSense concept. The discussion covers flood susceptibility, scenario-based assessment, deterministic and explainable reasoning, decision support, geographic information, location privacy, data provenance, disaster preparedness, and software quality. Findings, factors, weights, and formulas from other settings are not treated as Bacoor City parameters unless supported by local evidence, institutional approval, and expert validation.

Related Foreign Literature

Flood Susceptibility and Scenario-Based Assessment

Flood susceptibility describes the relative tendency of a location to experience flooding under stated conditions, rather than the timing or certainty of a particular flood. Membele, Naidu, and Mutanga (2022) observed that susceptibility and vulnerability mapping in developing countries is shaped by the availability, scale, and quality of spatial and socioeconomic data. Debnath et al. (2024) likewise showed that geospatial and expert-informed approaches require explicit factors, defensible spatial preparation, and validation. These findings support FloodSense's use of explicit scenario inputs and limitation states, while also showing why demonstration data cannot be represented as official local susceptibility information.

Nguyen, Fukuda, and Nguyen (2024) applied a Geographic Information System and analytical hierarchy process to urban flood-susceptibility assessment using multiple conditioning factors, expert consultation, and historical validation points. The method demonstrates the need to document how factors are selected and validated. Its weights and conclusions are not transferred to FloodSense because they were developed for a different location and evidence base.

Explainable Rule-Based Reasoning

Explainability is important when a system presents a classification that may influence preparedness decisions. Kostopoulos, Davrazos, and Kotsiantis (2024) reviewed explainable decision-support systems and emphasized transparency, interpretability, and understandable justification. FloodSense uses deterministic rule matching so that a result can be associated with the applicable scenario facts, matched rule, and explanation. This design does not involve machine-learning prediction or self-modifying rules.

The need for explainability does not require exposing rule editing to ordinary administrators. FloodSense separates the presentation of understandable result explanations from the technical maintenance of rules and algorithm logic. The custom Admin portal is therefore bounded to approved administrative workflows, while developer or research maintenance remains separate.

Decision Support for Preparedness

A Decision Support System organizes information and alternatives to help people make decisions without removing human judgment. Alabbad, Yildirim, and Demir (2022) presented a flood-mitigation decision-support framework that combined geographic information, scenarios, analysis, and decision support. For FloodSense, the susceptibility result is produced by the Rule-Based Expert System, while preparedness guidance is delivered by a separate DSS component. The guidance does not alter the assessment and does not become an official warning or evacuation order.

GIS and Public Risk Communication

Oubennaceur et al. (2021) demonstrated that interactive maps can combine spatial information, text, and user interaction to communicate flood risk to non-specialist audiences. Clear legends, labels, explanatory text, and careful limits are therefore necessary in FloodSense. A boundary or basemap identifies location but does not, by itself, justify a flood-susceptibility classification.

Fang et al. (2023) described a service-oriented approach that integrates geospatial resources and task chains for disaster decision support. The study supports separating data, processing, and user-facing services while maintaining traceable connections between them. FloodSense follows a comparable separation through a mobile client, REST services, deterministic assessment logic, a spatial database, and administrative workflows, while remaining narrower in scope and pre-event purpose.

Provenance and Responsible Geographic Data Use

Tullis and Kar (2021) explained that provenance is essential to ethical replicability and reproducibility in GIScience. Fakhruddin et al. (2022) likewise emphasized risk-informed data and the importance of understanding how disaster and climate data are produced and used. These principles support source records, validation status, version information, and explicit distinction among approved, provisional, technically checked, and unsupported FloodSense data.

Foreground Location and Privacy

Mobile location is sensitive personal information because it can reveal a person's movements and context. Android's permission model distinguishes foreground access from background access and encourages requesting only the access needed for the active function (Android Developers, 2026). FloodSense therefore limits its current location behavior to an optional user-initiated foreground request, permits confirmation or correction of the proposed barangay, and excludes continuous background tracking.

Software Quality Evaluation

ISO/IEC 25010:2023 defines a product-quality model for specifying and evaluating software quality. It provides nine characteristics that can guide the eventual FloodSense evaluation. The standard supplies an evaluation framework; it does not provide FloodSense scores. Quality findings will be reported only after an approved instrument has been administered and valid responses have been analyzed.

Related Local Literature

Flood Context and Preparedness in the Philippines

The Philippines experiences repeated losses from extreme events and disasters, making accessible preparedness information a continuing public need (Philippine Statistics Authority, 2026). In Cavite, the Japan International Cooperation Agency (2021) reported the inauguration of flood-protection facilities in the Imus River Basin intended to reduce floodwater affecting low-lying portions of Bacoar and Imus. These sources establish the local relevance of flood preparedness, but they do not supply operational FloodSense susceptibility parameters.

Responsible Use of Official and Local Data

National and local information must be used within the authority and limits of its source. The FloodSense research records identify BDRMO and CPDCO as relevant institutional sources for flood, preparedness, and geographic information. However, a record's existence, a proposal, a technical geometry check, or inclusion in the repository does not establish institutional approval for operational assessment. The system must retain provenance and avoid presenting provisional material as official Bacoar City information.

Data Privacy

Republic Act No. 10173, or the Data Privacy Act of 2012, establishes principles for the lawful and proportionate processing of personal information. For FloodSense, this supports purpose-limited location handling, authenticated administrative access, restricted permissions, and avoidance of unnecessary background collection. Privacy protections must be verified in the implemented flow and not assumed solely from a design document.

Related Studies

Recent studies collectively support several aspects of FloodSense. Susceptibility studies demonstrate the need for defensible factors, adequate

geographic resolution, and validation; interactive mapping studies show the value of understandable spatial communication; decision-support studies show how structured information can assist without replacing human judgment; and explainability studies support traceable output. None of these studies provides a ready-made rule set, parameter table, or official Bacoar City dataset for FloodSense.

Local research and institutional records identify a need for location-specific information and preparedness support. The completed initial resident survey described in Chapter 1 and the available key-informant records are requirements evidence. They are not substitutes for validation of the assessment knowledge, the geographic data, or the completed software. The newer survey package contains an instrument but no validated responses, so no result is inferred from it.

Synthesis of the Reviewed Literature

The literature establishes six design implications. FloodSense must: use an explicitly confirmed scenario; keep deterministic susceptibility assessment separate from DSS guidance; explain results in understandable terms; use GIS layers according to their actual provenance and meaning; collect foreground location only when requested; and evaluate software quality with a valid instrument after implementation is sufficiently complete. The current prototype demonstrates the technical flow, but operational use depends on approved susceptibility data, verified parameters, complete integration, and evaluation evidence.

Table 1. Comparative Synthesis of Selected Literature

SOURCE	FOCUS	CONTRIBUTION	FLOODSENSE BOUNDARY
Membele et al. (2022)	Mapping approaches	Highlights data and method limitations	Does not supply Bacoar parameters
Oubennaceur et al. (2021)	Interactive flood communication	Supports understandable spatial presentation	Does not validate FloodSense outputs
Alabbad et al. (2022)	Flood decision support	Supports scenario and decision-support separation	Does not authorize warnings or orders
Kostopoulos et al. (2024)	Explainable DSS	Supports transparency and understandable reasons	Does not require ordinary-admin rule editing
Tullis & Kar (2021)	GIS provenance	Supports traceability and responsible reuse	Technical checks do not equal institutional approval
ISO/IEC 25010:2023	Software product quality	Provides an evaluation framework	Provides no FloodSense evaluation result

METHODOLOGY

This chapter presents the research and development method for FloodSense, the current system design supported by the repository, the completed requirements-gathering activities, and the procedures planned for testing and evaluation. Completed functions are described in the present or past tense. Ongoing, planned, confirmed but unimplemented, and data-dependent work is identified accordingly. No survey result, software-quality score, acceptance result, or statistical finding is reported without completed and validated evidence.

Research Design

The study uses a developmental research design to produce and examine a mobile and web-based information system. Design Thinking organizes the research activities into Empathize, Define, Ideate, Prototype, and Test. The approach links resident information needs and institutional evidence to an iterative prototype while allowing requirements, interfaces, and validation boundaries to be refined as evidence becomes available.

The initial Empathize activity included the survey of 50 residents from 12 Bacoor City barangays and key-informant interviews described in Chapter 1. These completed activities are used as requirements evidence. The newer survey package is treated only as a research instrument because it does not contain validated responses or analysis.

Research Setting and Participants

The research is conducted at Cavite State University - Bacoor City Campus, with Bacoor City as the geographic and institutional context of the application. The completed requirements evidence involves the 50 initial resident respondents and the available BDRMO and CPDCO key-informant records identified in Chapter 1. Their

contributions concern information needs, institutional context, and potential data sources; they do not by themselves validate every current feature or dataset.

Participants for the final resident survey and system evaluation will be reported only after the sampling method, inclusion criteria, valid response count, and completed responses have been approved and verified.

[AUTHOR NOTE: Survey data collection is ongoing. Complete this section after the validated survey responses and approved analysis are available.]

Research Instruments

The completed requirements-gathering instruments consist of the initial resident survey and the available key-informant interview guides and records. Repository documentation, approved school documents, current source code, database migrations, interfaces, and automated tests are used as development evidence. Plans, mockups, diagrams, screenshots, and provisional datasets are used only according to their stated status and are not treated as proof of an implemented or approved feature.

The newer survey questionnaire and evaluation materials remain instruments rather than results. Before use in final analysis, their validity, administration procedure, respondent eligibility, response completeness, and statistical treatment must be documented.

Development Procedure

Empathize

The researchers identify resident information problems and institutional practices through the completed initial survey, interviews, and document review. The activity focuses on access to location-specific susceptibility information, clarity and

timing of preparedness information, and the institutional sources needed for responsible geographic and preparedness content.

Define

The requirements are translated into a bounded problem definition: a resident selects or confirms a hypothetical rainfall scenario and a supported location, requests an assessment, receives a deterministic susceptibility result with an explanation, and views separate pre-event preparedness guidance. Real-time monitoring, official forecasting, autonomous alerts, background tracking, automatic evacuation orders, live center occupancy, and safe-road routing are excluded.

Ideate

Alternative mobile interactions, map behaviors, result presentations, administrative workflows, and data-governance controls are represented in requirements documents and interface designs. Each proposed element is checked against the research objective, the privacy boundary, data availability, and the separation between susceptibility assessment and DSS guidance.

Prototype

The prototype is implemented through a Flutter mobile application, a Django and Django REST Framework backend, PostgreSQL/PostGIS spatial storage, and a custom web Admin portal. The prototype is refined by comparing mobile screens, routes, services, models, migrations, permissions, templates, and tests with the documented requirements.

Test and Iterate

Testing and iteration cover input validation, deterministic inference, rule matching and conflict handling, geographic lookup, API behavior, permissions, mobile interaction, custom Admin workflows, and appropriate limitation responses. Final acceptance and quality conclusions will be added only after a complete, dated test run and the approved user evaluation are available.

[DIAGRAM PLACEHOLDER: Insert the approved Design Thinking or system-development process diagram here.]

System Design and Current Implementation

Mobile Application

The Flutter mobile application implements rainfall-intensity choices of Light, Moderate, Heavy, Intense, and Torrential and duration choices of 1, 3, 6, 12, and 24 hours. The user confirms the scenario before requesting an assessment. The location flow supports manual selection, a movable map pin, and an optional one-time foreground GPS request. A detected barangay is proposed for user confirmation or correction. The application does not implement continuous background tracking.

The mobile map supports panning, zooming, demonstration scenario coloring, manual selection, and display of the neutral 47-barangay reference layer. The current layer is an administrative identity reference produced through a documented derivation. Its geometry has been technically checked, but it is not established as City-issued or City-verified and contains no flood-susceptibility facts.

Backend, REST Services, and Spatial Database

Django and Django REST Framework provide validation, permissions, APIs, business logic, and administrative services. GeoDjango and PostgreSQL/PostGIS support spatial records and point-to-area processing. Models and migrations provide database structure, but a model is not treated as a complete user function unless the relevant route, service, interface, integration, permissions, tests, and required data are also present.

Deterministic Rule-Based Expert System

The Expert System uses deterministic rule matching for a confirmed rainfall scenario and supported geographic context. It produces a susceptibility class and explanation. The backend includes rule matching, priorities, conflict handling,

validation, and related tests. The system does not use machine-learning prediction, automatic retraining, or self-modifying rules.

Decision Support System

The DSS is maintained separately from assessment logic. Its current backend and Admin workflow manage preparedness content that can be published and returned as guidance. The DSS consumes the assessment context but does not change the susceptibility class. A complete resident-facing structured multi-question flow has not been verified and remains developing or planned.

Custom Admin Portal and Technical Django Admin

The custom Admin portal implements authentication, a dashboard, read-only map-data review, rainfall-reference review, parameter-governance views, DSS-content management, evacuation-center management, data-source management, and audit-history review. Ordinary administrators do not directly edit raw rules, rule conditions, priorities, conflict resolution, or the inference algorithm. Technical Django Admin is a separate maintenance surface for developer or research use and is not the ordinary administrator workflow.

Fixed-Schema CSV Requirement

The confirmed design requires the administrator to export a canonical CSV table with system-required column names, parameter identifiers, and data types. Authorized editors may change only permitted values within the fixed fields. Import must validate the structure, required fields, parameter identifiers, values, and data types and reject incompatible files. This workflow will not expose raw rule editing or permit algorithm changes.

CSV export and import is a confirmed requirement but is not implemented in the current repository. It will remain described as future implementation until routes, services, validation, interface controls, permissions, integration, and tests are present and verified.

Data Sources, Provenance, and Validation

The backend and custom Admin portal support source records, validation status, and audit history. The approved-data directory currently contains guidance but no approved operational susceptibility dataset. Provisional data remains fictional, incomplete, unvalidated, restricted, or awaiting approval. Processing scripts demonstrate that a preparation or verification method exists, but they do not prove institutional approval or operational database use.

[DIAGRAM PLACEHOLDER: Insert the approved context diagram here.]

[DIAGRAM PLACEHOLDER: Insert the approved data-flow diagram here.]

[DIAGRAM PLACEHOLDER: Insert the approved use-case diagram here.]

[DIAGRAM PLACEHOLDER: Insert the approved entity-relationship diagram here.]

Current Development Status

Table 2. Summary of Current Prototype Status

FUNCTION	STATUS	METHODOLOGICAL TREATMENT
Scenario selection, confirmation, deterministic assessment, explanation	Implemented and currently verified in code	Included in prototype testing
Manual selection, map pin, foreground GPS, barangay confirmation	Implemented and currently verified in code	Verify permissions, correction, and limitation behavior
Custom Admin dashboard and governed content workflows	Implemented and currently verified in code	Test role permissions and workflow validation
Fixed-schema CSV export and import	Confirmed requirement - not yet implemented	Future implementation and testing
Resident nearest-center discovery	Not implemented	Do not evaluate as an available resident function
Resident accounts, assessment history, notifications, offline use	Not implemented or outside current scope	Exclude from current effectiveness claims
Approved operational susceptibility data	Blocked or awaiting data	Demonstration output only; no official claim
Final survey and ISO/IEC 25010 evaluation	Ongoing or not yet conducted	Report only after validation and analysis

Testing and Verification

The repository contains automated tests for backend models, services, APIs, permissions, geographic processing, Expert System behavior, custom Admin workflows, and mobile functions. These tests constitute implementation evidence when their scope and execution record are known. Historical test files alone are not reported as a current passing result.

During the documentation preparation, all 117 Python source files passed a syntax-tree parse. The full Django and Flutter test suites were not rerun because the available documentation environment lacked Django, Django REST Framework, pytest, psycopg, Flutter, and Dart. Final Chapter 3 test results must identify the environment, date, commit, commands, passed and failed tests, and any unavailable dependencies.

System Evaluation Plan

The final system evaluation will use criteria derived from ISO/IEC 25010:2023 and the approved institutional instrument. The selected characteristics, indicators, scale, respondent groups, administration procedure, and interpretation method will be documented before analysis. Accessibility and context-specific research questions may be reported separately when they are not direct ISO product-quality characteristics.

[AUTHOR NOTE: Survey data collection is ongoing. Complete this section after the validated survey responses and approved analysis are available.]

Statistical Treatment of Data

Frequencies and percentages may be used for completed categorical survey items. When an approved Likert-type evaluation instrument is available, the study may use the institutionally approved scoring and summary method. The manuscript will state the formula, scale anchors, interpretation ranges, number of valid responses, missing-data treatment, and reliability procedure actually used. No weighted mean, ranking, acceptance level, or quality score is reported at this stage.

Ethical, Privacy, and Data-Governance Considerations

Research participation must be voluntary and based on the approved consent and data-handling procedure. Personally identifiable information must be limited to what is necessary, protected from unauthorized access, and retained only according to the approved research process. Application location is requested only when the user initiates the function, used for the active assessment flow, and not continuously collected in the background.

Geographic, susceptibility, rainfall-reference, preparedness, and evacuation-center records must retain source and validation information. Provisional or technically

derived data must be labeled accurately. Operational publication requires the appropriate institutional approval and must not be inferred from repository presence, a diagram, a mockup, or a processing script.

Methodological Limitations

The current prototype demonstrates the application flow and supporting administration but does not yet have an approved operational susceptibility dataset. The 47-barangay boundary is a neutral administrative reference, not a flood-hazard layer. CSV exchange, resident nearest-center discovery, resident account flows, assessment history, notifications, offline operation, final survey analysis, full test execution in the required environments, and production deployment are incomplete or outside the current scope. These limits prevent claims of operational forecasting, official warning capability, or completed user acceptance.

REFERENCES

- Alabbad, Y., Yildirim, E., & Demir, I. (2022). Flood mitigation data analytics and decision support framework: Iowa Middle Cedar Watershed case study. *Science of the Total Environment*, 814, 152768. <https://doi.org/10.1016/j.scitotenv.2021.152768>
- Android Developers. (2026). Request location permissions. <https://developer.android.com/develop/sensors-and-location/location/permissions>
- Buchanan, B. G., & Shortliffe, E. H. (Eds.). (1984). Rule-based expert systems: The MYCIN experiments of the Stanford Heuristic Programming Project. Addison-Wesley.
- Debnath, J., Sahariah, D., Nath, N., Saikia, A., Lahon, D., Islam, M. N., Hashimoto, S., Meraj, G., Kumar, P., Singh, S. K., Kanga, S., & Chand, K. (2024). Modelling on assessment of flood risk susceptibility at the Jia Bharali River basin in Eastern Himalayas by integrating multicollinearity tests and geospatial techniques. *Modeling Earth Systems and Environment*, 10, 2393-2419. <https://doi.org/10.1007/s40808-023-01912-1>
- Fakhruddin, B., Kirsch-Wood, J., Niyogi, D., Guoqing, L., Murray, V., & Frolova, N. (2022). Harnessing risk-informed data for disaster and climate resilience. *Progress in Disaster Science*, 16, 100254. <https://doi.org/10.1016/j.pdisas.2022.100254>
- Fang, Z., Yue, P., Zhang, M., Xie, J., Wu, D., & Jiang, L. (2023). A service-oriented collaborative approach to disaster decision support by integrating geospatial resources and task chain. *International Journal of Applied Earth Observation and Geoinformation*, 117, 103217. <https://doi.org/10.1016/j.jag.2023.103217>
- International Organization for Standardization. (2023). ISO/IEC 25010:2023 systems and software engineering - Systems and software Quality Requirements and Evaluation (SQuaRE) - Product quality model. <https://www.iso.org/standard/78176.html>
- Japan International Cooperation Agency. (2021, October 1). Flood risk protection project in Cavite inaugurated. <https://www.jica.go.jp/english/overseas/philippine/information/press/2021/211001.html>
- Kostopoulos, G., Davrazos, G., & Kotsiantis, S. (2024). Explainable artificial intelligence-based decision support systems: A recent review. *Electronics*, 13(14), 2842. <https://doi.org/10.3390/electronics13142842>
- Longley, P. A., Goodchild, M. F., Maguire, D. J., & Rhind, D. W. (2015). *Geographic information science and systems* (4th ed.). Wiley.
- Membele, G. M., Naidu, M., & Mutanga, O. (2022). Examining flood vulnerability mapping approaches in developing countries: A scoping review. *International Journal of Disaster Risk Reduction*, 69, 102766. <https://doi.org/10.1016/j.ijdrr.2021.102766>

- Nguyen, H. N., Fukuda, H., & Nguyen, M. N. (2024). Assessment of the susceptibility of urban flooding using GIS with an analytical hierarchy process in Hanoi, Vietnam. *Sustainability*, 16(10), 3934. <https://doi.org/10.3390/su16103934>
- Oubennaceur, K., Chokmani, K., El Alem, A., & Gauthier, Y. (2021). Flood risk communication using ArcGIS StoryMaps. *Hydrology*, 8(4), 152. <https://doi.org/10.3390/hydrology8040152>
- Philippine Atmospheric, Geophysical and Astronomical Services Administration. (2019, January 16). Official statement of DOST-PAGASA on the heavy rainfall event associated with Tropical Depression Usman. <https://www.pagasa.dost.gov.ph/article/38>
- Philippine Statistics Authority. (2026). Component 4: Extreme events and disasters. <https://psa.gov.ph/statistics/environment-statistics/highlights/component-4-extreme-events-and-disaster>
- Power, D. J. (2002). *Decision support systems: Concepts and resources for managers*. Quorum Books.
- Republic Act No. 10173. (2012). Data Privacy Act of 2012. Republic of the Philippines. <https://privacy.gov.ph/data-privacy-act/>
- Tullis, J. A., & Kar, B. (2021). Where is the provenance? Ethical replicability and reproducibility in GIScience and its critical applications. *Annals of the American Association of Geographers*, 111(5), 1318-1328. <https://doi.org/10.1080/24694452.2020.1806029>