

A

A

B


B

C


C

D


D

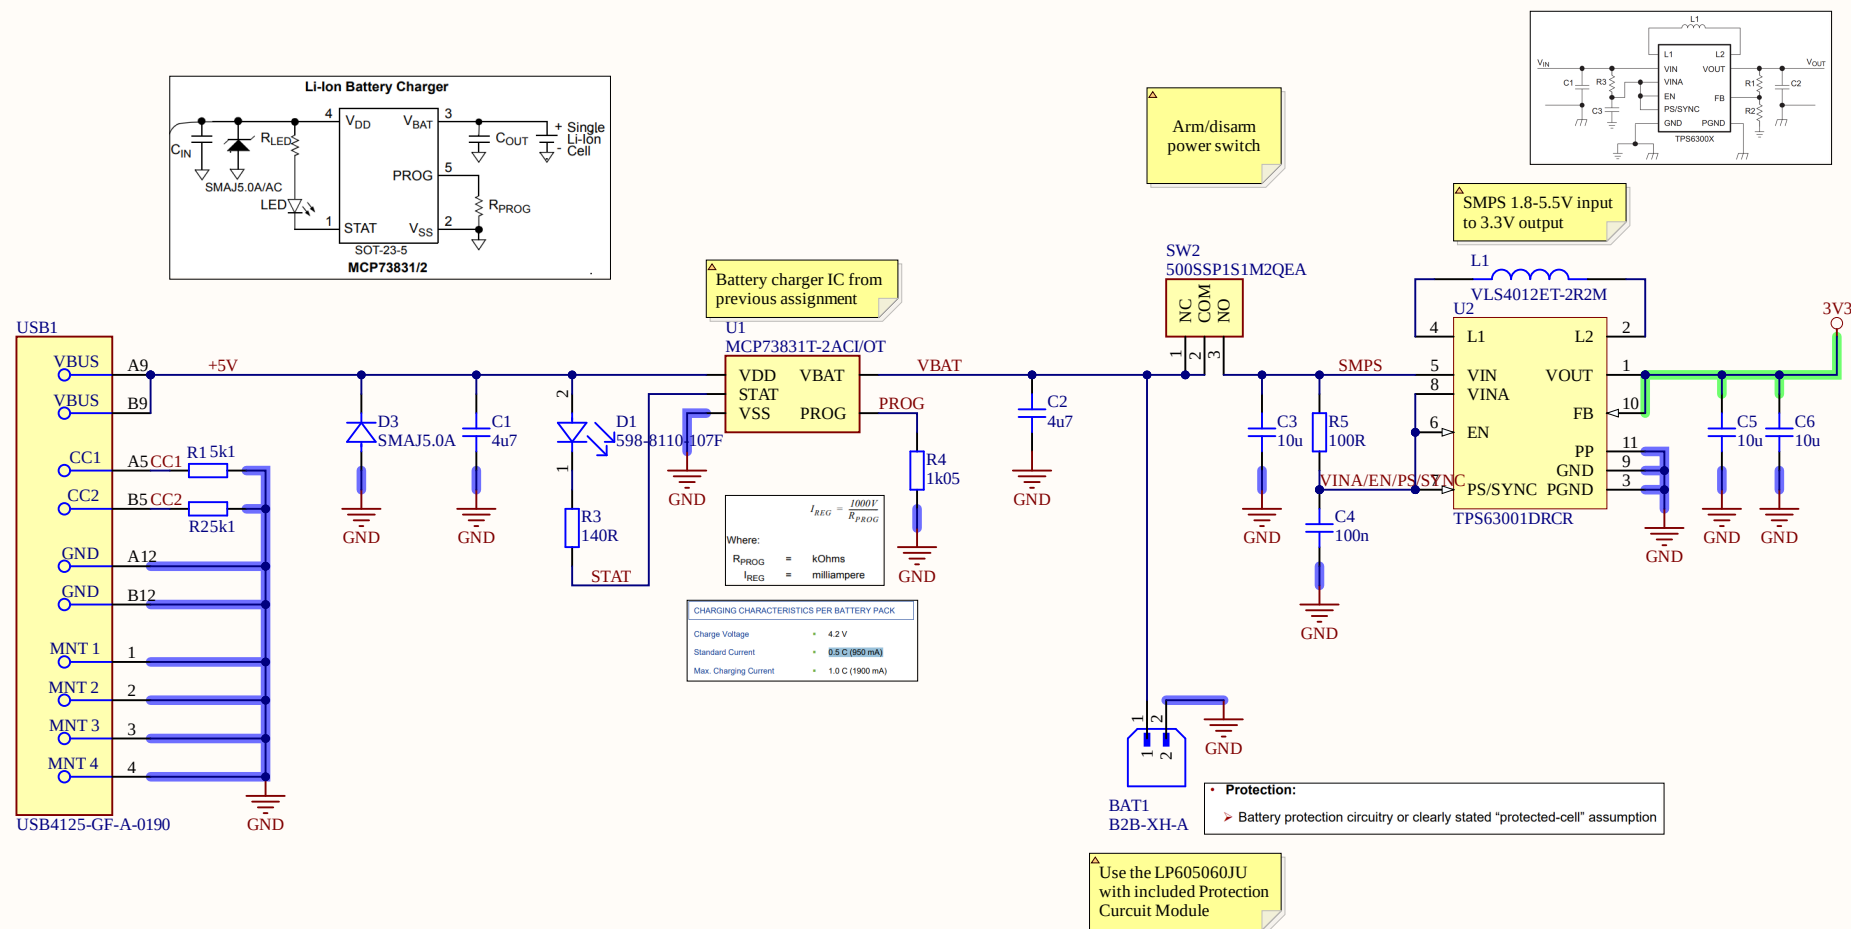



Title		
Size	Number	Revision
A4		
Date:	10/01/2026	Sheet of
File:	BatteryCharger.SchDoc	Drawn By:

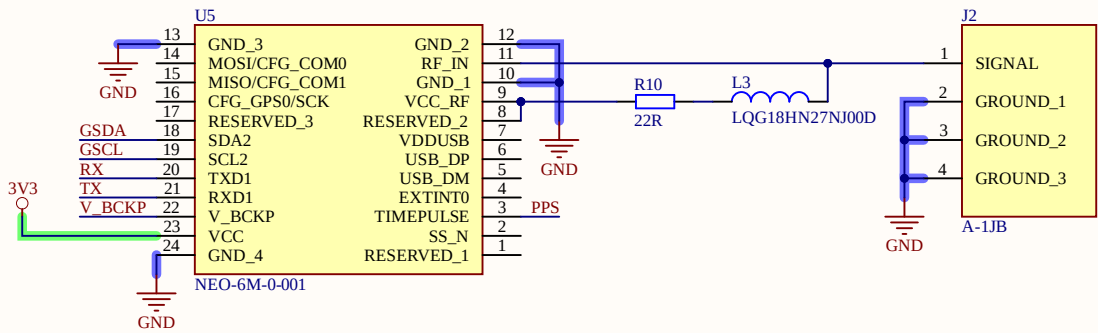


Timepulse LED

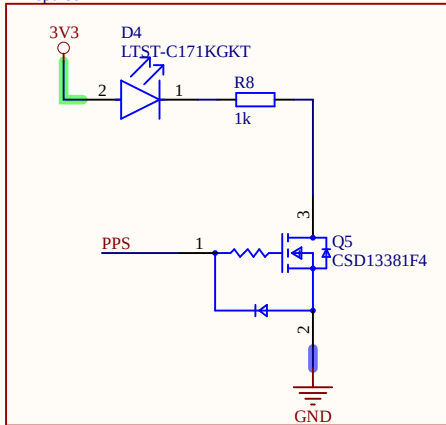


Back-up Battery

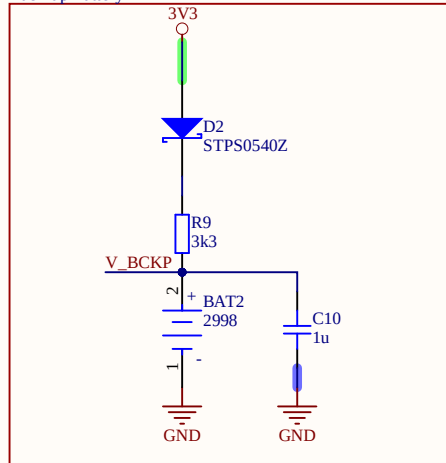

Title		
Size	Number	Revision
A		
Date:	10/01/2026	Sheet of
File:	GPS.SchDoc	Drawn By:


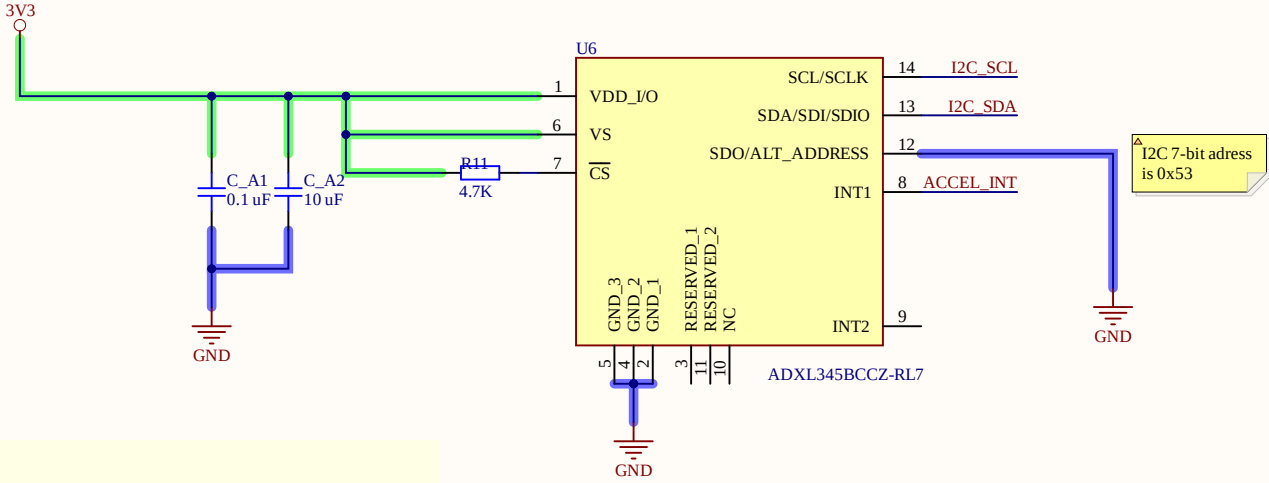


I2C 7-bit address is 0x53



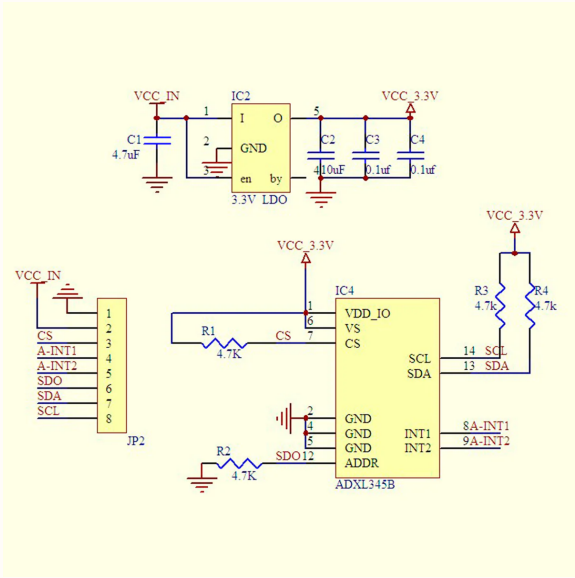


Title		
Size	Number	Revision
A		
Date:	10/01/2026	Sheet of
File:	GyroSense.SchDoc	Drawn By:

3.1 Power supply
Power supply requirements are identical to a regular STM32WL55 MCU. Refer to the product datasheet (DS13283).
Pinning exceptions on power supply pins and components for the SMP5 are already integrated into the module.

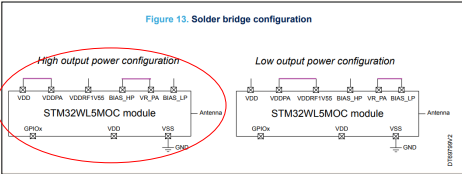

STM32WL5MOCH6TR
U3C

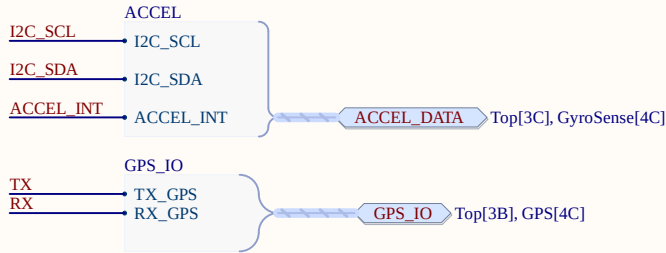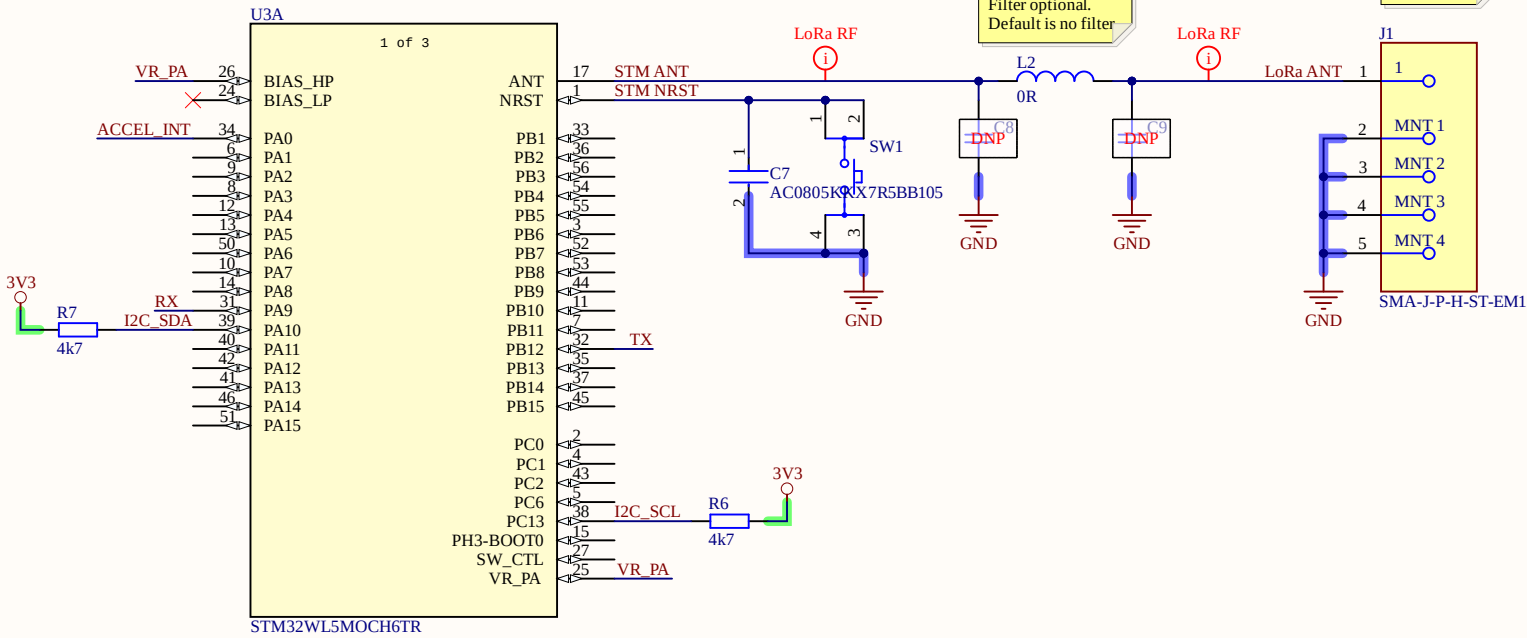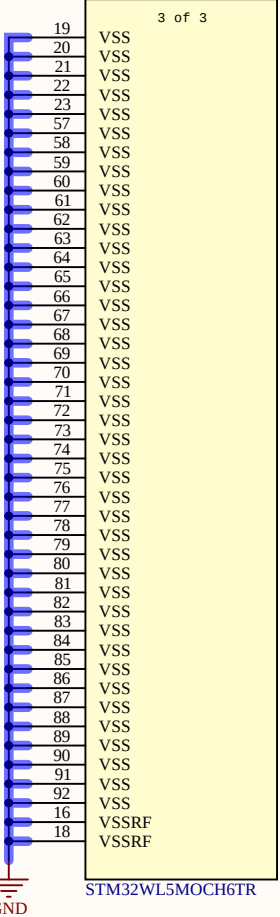

Title		
Size	Number	Revision
A4		
Date:	10/01/2026	Sheet of
File:	MCU.SchDoc	Drawn By:


U_BatteryCharger
BatteryCharger.SchDoc



U_GPS
GPS.SchDoc



U_MCU
MCU.SchDoc



U_GyroSense
GyroSense.SchDoc



Title		
Size A	Number	Revision
Date:	10/01/2026	Sheet of
File:	Top.SchDoc	Drawn By: