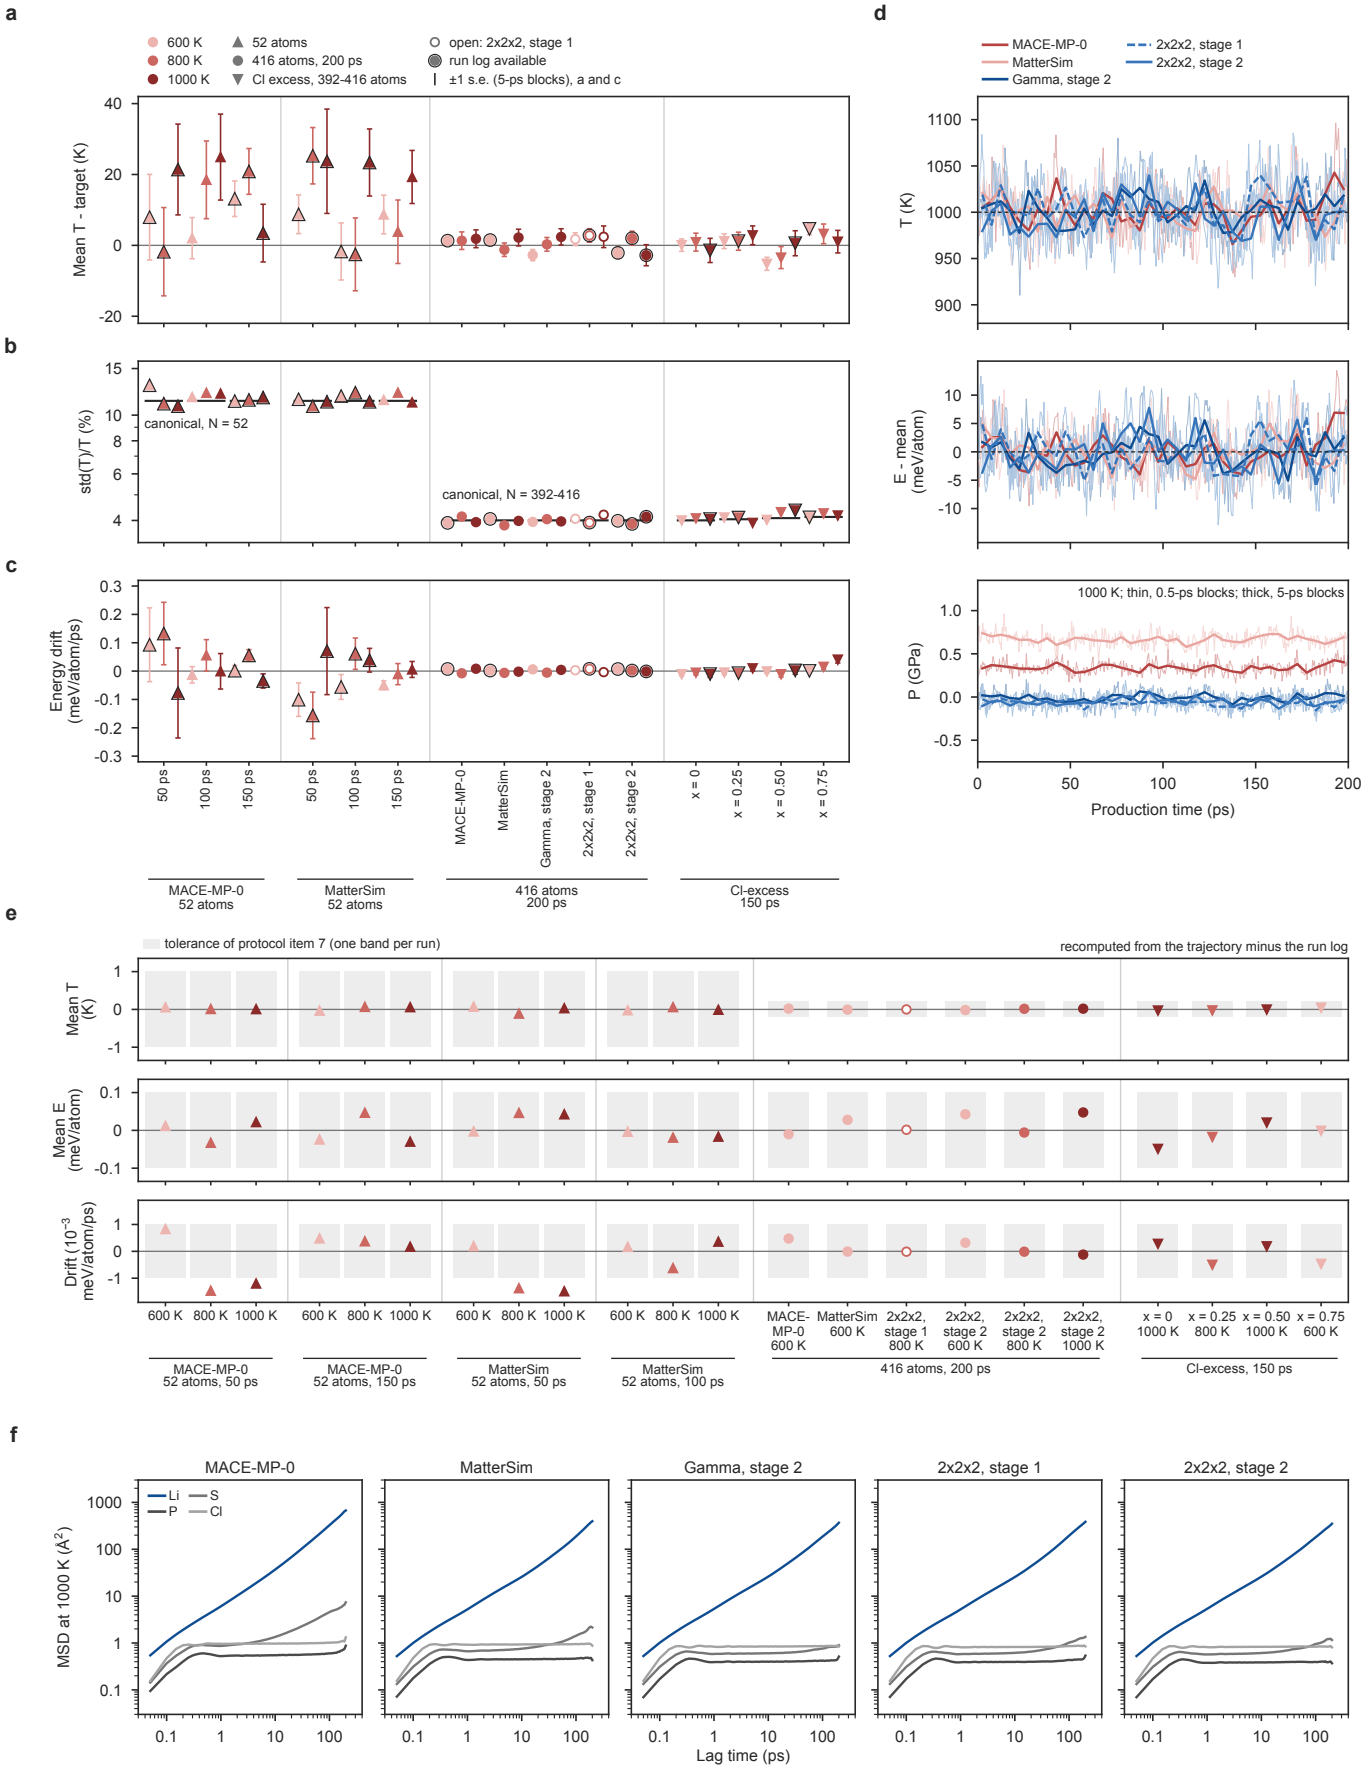

a
600 K
800 K
1000 K
52 atoms
416 atoms, 200 ps
CI excess, 392-416 atoms
open: 2x2x2, stage 1
run log available
±1 s.e. (5-ps blocks), a and c
Mean T - target (K)
b
std(T)/T (%)
canonical, N = 52
canonical, N = 392-416
c
Energy drift (meV/atom/ps)
50 ps
100 ps
150 ps
MACE-MP-0
MatterSim
Gamma, stage 2
2x2x2, stage 1
2x2x2, stage 2
x = 0
x = 0.25
x = 0.50
x = 0.75
MACE-MP-0 52 atoms
MatterSim 52 atoms
416 atoms 200 ps
CI-excess 150 ps
d
MACE-MP-0
MatterSim
Gamma, stage 2
2x2x2, stage 1
2x2x2, stage 2
T (K)
E - mean (meV/atom)
1000 K; thin, 0.5-ps blocks; thick, 5-ps blocks
P (GPa)
Production time (ps)
e
tolerance of protocol item 7 (one band per run)
recomputed from the trajectory minus the run log
Mean T (K)
Mean E (meV/atom)
Drift (10^{-3} meV/atom/ps)
600 K
800 K
1000 K
MACE-MP-0 600 K
MatterSim 600 K
2x2x2, stage 1 800 K
2x2x2, stage 2 600 K
2x2x2, stage 2 800 K
2x2x2, stage 2 1000 K
x = 0 1000 K
x = 0.25 800 K
x = 0.50 1000 K
x = 0.75 600 K
MACE-MP-0 52 atoms, 50 ps
MACE-MP-0 52 atoms, 150 ps
MatterSim 52 atoms, 50 ps
MatterSim 52 atoms, 100 ps
416 atoms, 200 ps
CI-excess, 150 ps
f
MACE-MP-0
MatterSim
Gamma, stage 2
2x2x2, stage 1
2x2x2, stage 2
Li
S
P
Cl
MSD at 1000 K (Å^2)
Lag time (ps)