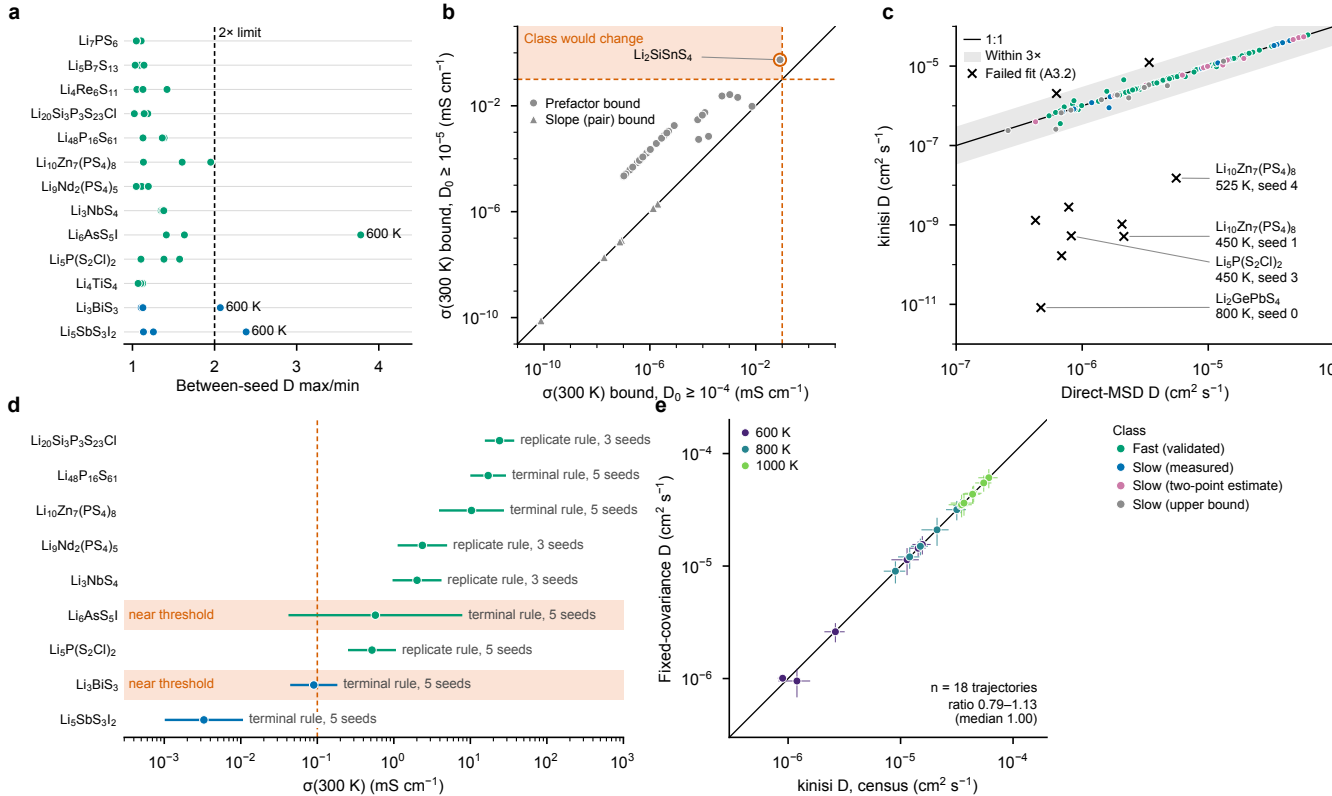

a
2× limit
Li7PS6
Li5B7S13
Li4Re6S11
Li20Si3P3S23Cl
Li48P16S61
Li10Zn7(PS4)8
Li9Nd2(PS4)5
Li3NbS4
Li6AsS5I
Li5P(S2Cl)2
Li4TiS4
Li3BiS3
Li5SbS3I2
600 K
600 K
600 K
1
2
3
4
Between-seed D max/min
b
Class would change
Li2SiSnS4
Prefactor bound
Slope (pair) bound
σ(300 K) bound, D0 ≥ 10−5 (mS cm−1)
σ(300 K) bound, D0 ≥ 10−4 (mS cm−1)
c
1:1
Within 3×
Failed fit (A3.2)
Li10Zn7(PS4)8
525 K, seed 4
Li10Zn7(PS4)8
450 K, seed 1
Li5P(S2Cl)2
450 K, seed 3
Li2GePbS4
800 K, seed 0
kinisi D (cm2 s−1)
Direct-MSD D (cm2 s−1)
d
Li20Si3P3S23Cl
Li48P16S61
Li10Zn7(PS4)8
Li9Nd2(PS4)5
Li3NbS4
Li6AsS5I
Li5P(S2Cl)2
Li3BiS3
Li5SbS3I2
replicate rule, 3 seeds
terminal rule, 5 seeds
terminal rule, 5 seeds
replicate rule, 3 seeds
replicate rule, 3 seeds
near threshold
terminal rule, 5 seeds
replicate rule, 5 seeds
near threshold
terminal rule, 5 seeds
terminal rule, 5 seeds
σ(300 K) (mS cm−1)
e
600 K
800 K
1000 K
Fixed-covariance D (cm2 s−1)
kinisi D, census (cm2 s−1)
n = 18 trajectories
ratio 0.79–1.13
(median 1.00)
Class
Fast (validated)
Slow (measured)
Slow (two-point estimate)
Slow (upper bound)