

Mise en place PfSense

Fait en entreprise et dans le cadre de l'épreuve E4 du BTS SIO 2022-2024

[Télécharger en PDF](#)

pfSense/pfSense

Main repository for pfSense



365
Contributors

0
Issues

5k
Stars

1k
Forks



BTS SIO 2024

Support & mise à disposition de service informatique

(E4)

PAGE DE PRÉSENTATION DU DOSSIER

N° d'inscription¹ : |_0_|_1_|_9_|_4_|_7_|_1_|_7_|_4_|_4_|_7_|_4_|

NOM :Jacquel.....

PRENOM :Angel.....

date de passage ¹ : 24/05/2024	Heure de passage ¹ : 10h.....
-------------------------------------------	------------------------------------------

ÉTABLISSEMENT DE PASSAGE

CATEGORIE CANDIDAT ² (UNE CASE A COCHER)	
<input type="checkbox"/> Scolaire <input checked="" type="checkbox"/> Apprenti <input type="checkbox"/> Formation professionnelle continue <input type="checkbox"/> Expérience professionnelle 3 ans	<input type="checkbox"/> Ex-scolaire <input type="checkbox"/> Ex-apprenti <input type="checkbox"/> Ex-formation professionnelle continue

¹Informations communiquées sur votre convocation envoyée courant mars 2024 sur votre compte Cyclades

²Informations communiquées sur votre confirmation d'inscription.

Tampon de L'établissement

SIEC – maison des examens

7 rue Ernest Renan
94749 ARCUEIL CEDEX
Tél : 01 49 12 23 00
www.siec.education.fr



Sommaire

- [Pour Commencer](#)
 - [Prérequis](#)
 - [Installation](#)
 - [Formatage de la clé USB](#)
 - [Système](#)
 - [Configuration Interne](#)
 - [Configuration GUI](#)
 - [Configuration Interfaces](#)
 - [Configuration VLANs](#)
 - [Configuration DHCP](#)
 - [Configuration Firewall](#)
 - [Configuration Applications](#)
 - [Suricata](#)
 - [SSH](#)
 - [Configuration ACL](#)
 - [ACL Vlan 100](#)
 - [ACL Vlan 200](#)
 - [ACL WAN](#)

Pour Commencer

Mon entreprise, KNCO, a pris la décision de passer du routeur de notre FAI à un routeur PfSense, afin de pouvoir mieux gérer la sécurisation du réseau et débrider la vitesse de connexion dans les locaux, bridée par la maigre puissance du routeur original, causant des problèmes lors d'interventions à distance mais aussi lors de connexions sur notre serveur SAP, se faisant en Remote Desktop (RDP)

Il a également été demandé de gérer le réseau interne et le réseau du WiFi invité séparément, pour cela nous créeront deux VLAN, un interne et un pour le WiFi invité
Le besoin principal est donc de pouvoir gérer la sécurisation du réseau et de se débarrasser de l'équipement de base de notre fournisseur internet

Prérequis

- [Rufus](#), [Balena Etcher](#) ou tout autre logiciel du genre
- Clé/Stockage USB de 4Go minimum
- ISO de [PfSense](#)
- Un serveur 2 coeurs et 2Go minimum **avec ici, trois cartes réseaux ou plus**

Installation

Formatage de la clé USB

1. Téléchargez l'ISO de PfSense (ici 2.7.0, AMD64, DVD Image)


The screenshot shows the pfSense download page. At the top, there are social media icons and navigation links for Get Started, Cloud, Products, Services, Support, Training, Community, and Download. Below that, the pfSense logo is displayed. A banner at the top says "Latest Stable Version (Community Edition)". A note below it states: "This is the most recent stable release, and the recommended version for all installations. Refer to the documentation for Upgrade Guides and Installation Guides. For pre-configured systems, see the pfSense® firewall appliances from Netgate." There are two tabs: "RELEASE NOTES" and "SOURCE CODE". The "RELEASE NOTES" tab is selected. On the left, a form titled "Select Image To Download" allows users to choose the Version (2.7.0), Architecture (AMD64 (64-bit)), Installer (DVD Image (ISO) Installer), and Mirror (Austin, TX USA). A large blue button labeled "DOWNLOAD" is present. On the right, a section titled "Subscribe To The Netgate Newsletter" contains fields for Email Address and a checkbox for accepting the newsletter terms. Below that, another checkbox allows users to receive information about pfSense Plus Appliances and TNSR Appliances. A "Subscribe" button and a link to the privacy policy are also present.

2. Téléchargez Rufus


The screenshot shows the GitHub release page for Rufus 4.3. The page header includes links for Code, Issues (12), Pull requests (1), Actions, Projects (1), Wiki, Security, and Insights. The main content area shows the release details for "Rufus 4.3 (Latest)". It notes that pbatard released this last month with 3 commits to master since this release. The commit hash is v4.3-020e0b7. Below this, a list of changes includes: Add support for symbolic link preservation when NTFS is used; Add an exception to enforce NTFS for Linux Mint's LMDE; Add an expert feature to restrict a Windows installation to S Mode; Fix persistence support for Debian 12 in BIOS mode; Fix a regression that prevented the opening of .vhdx images (#2309); Update UEFI:NTFS to report a more explicit error on bootmgr security issues; Improve the search for conflicting processes, by running it in a background thread; Improve support for Slax Linux (#2336). A "Assets" section lists two files: "rufus-4.3.exe" (1.37 MB, last month) and "rufus-4.3.exe.sig" (256 Bytes, last month).

3. Branchez la clé USB sur le PC


4. Ouvrir Rufus

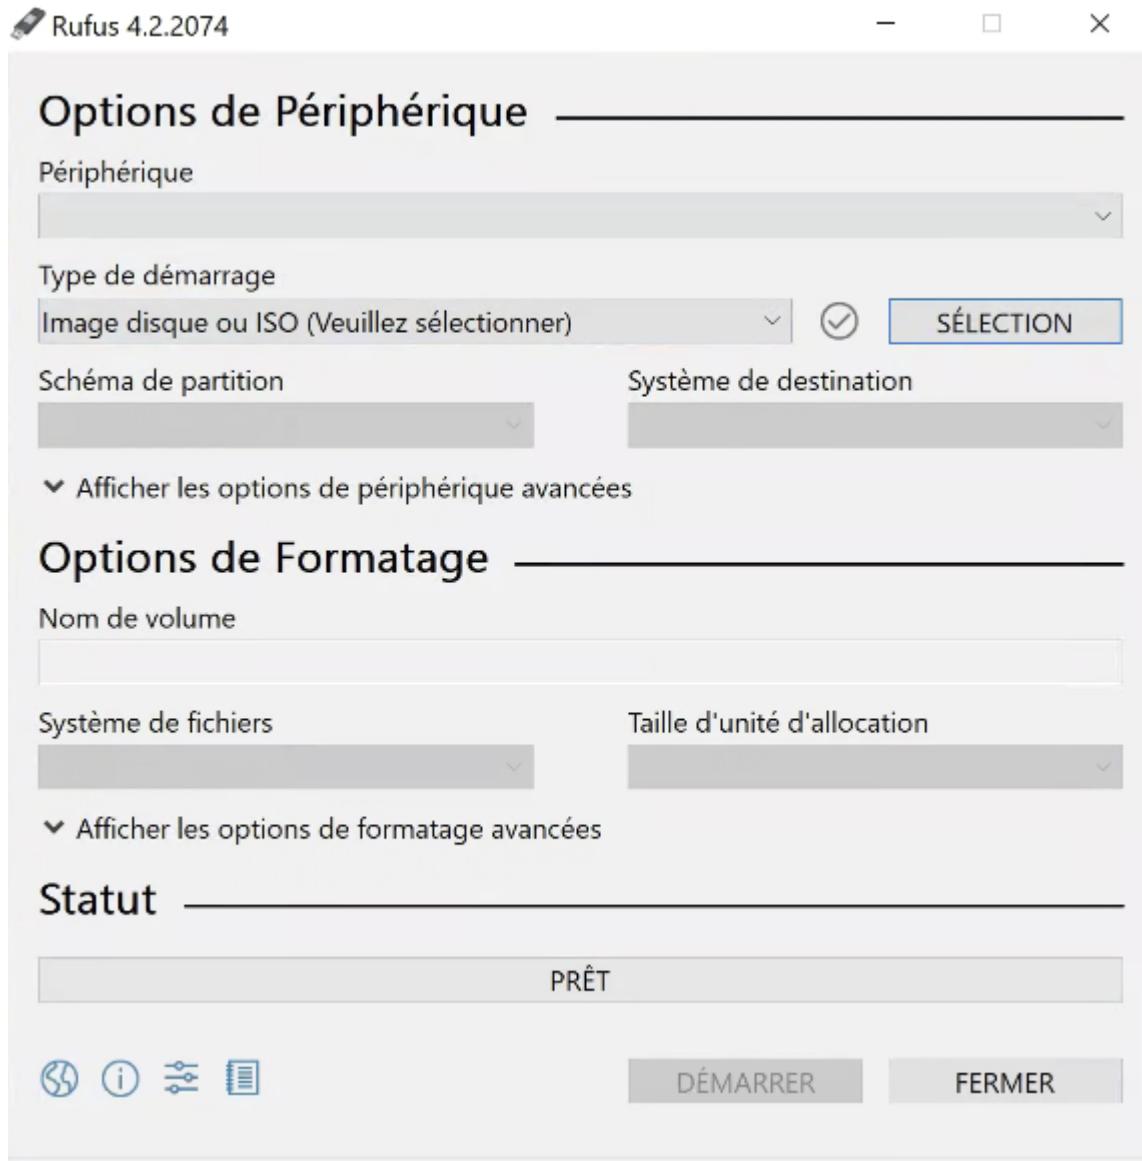


5. Sélectionnez la clé USB

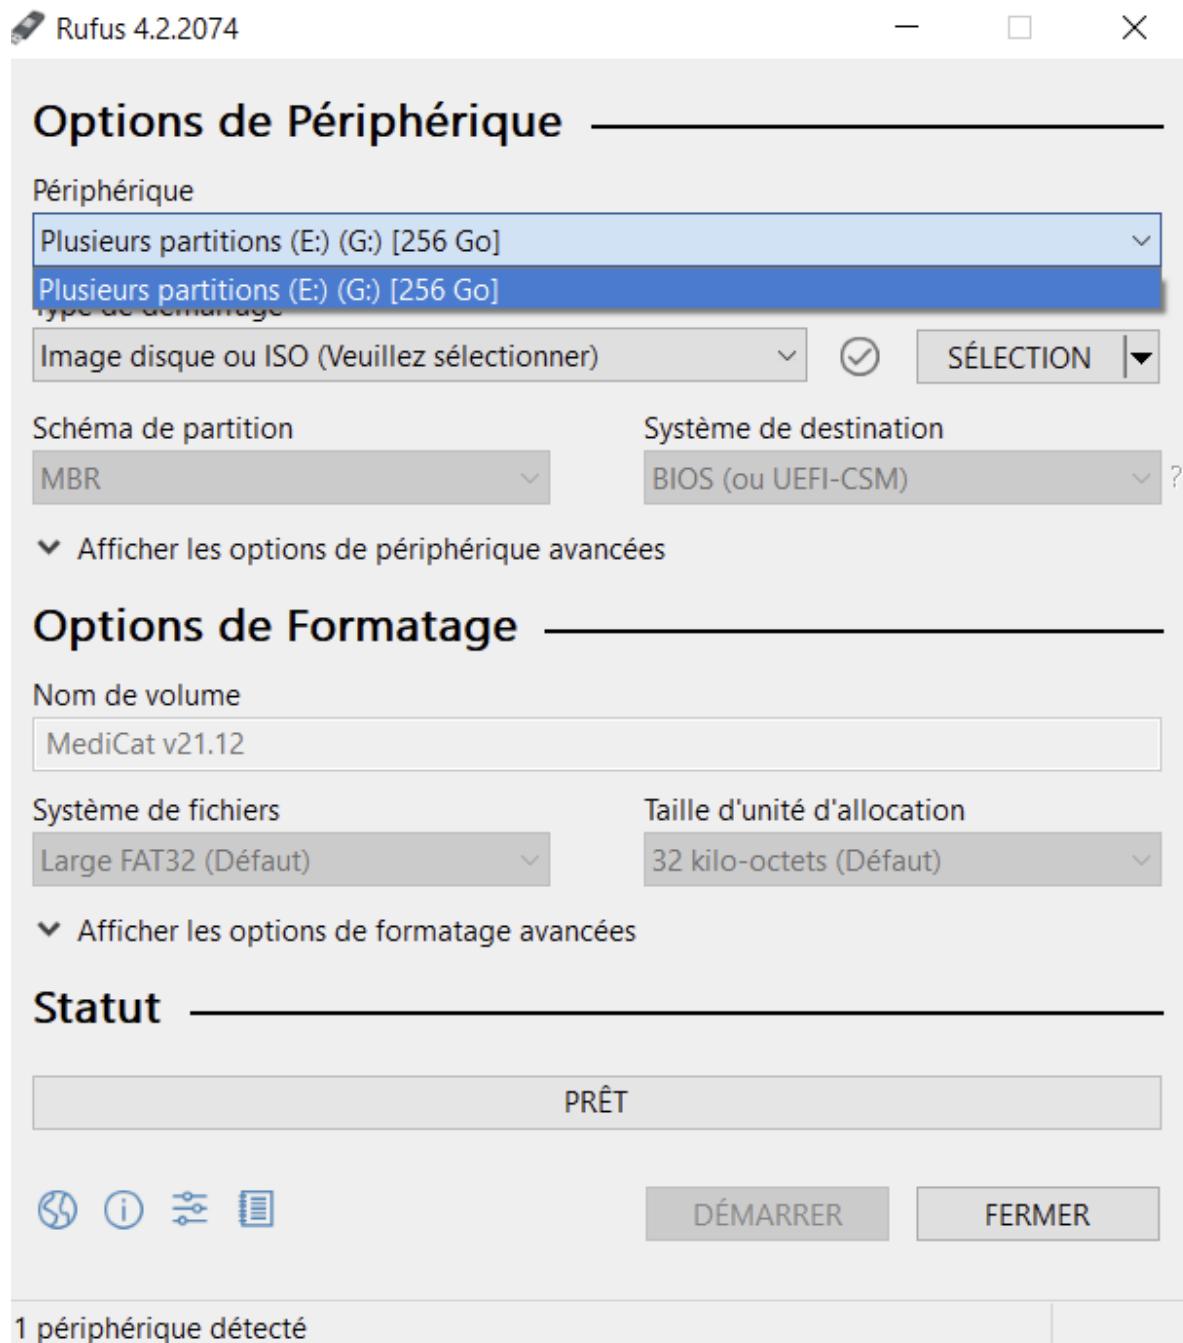

6. Sélectionnez l'ISO de PfSense, continuez si vous avez une erreur "ISOHybrid"

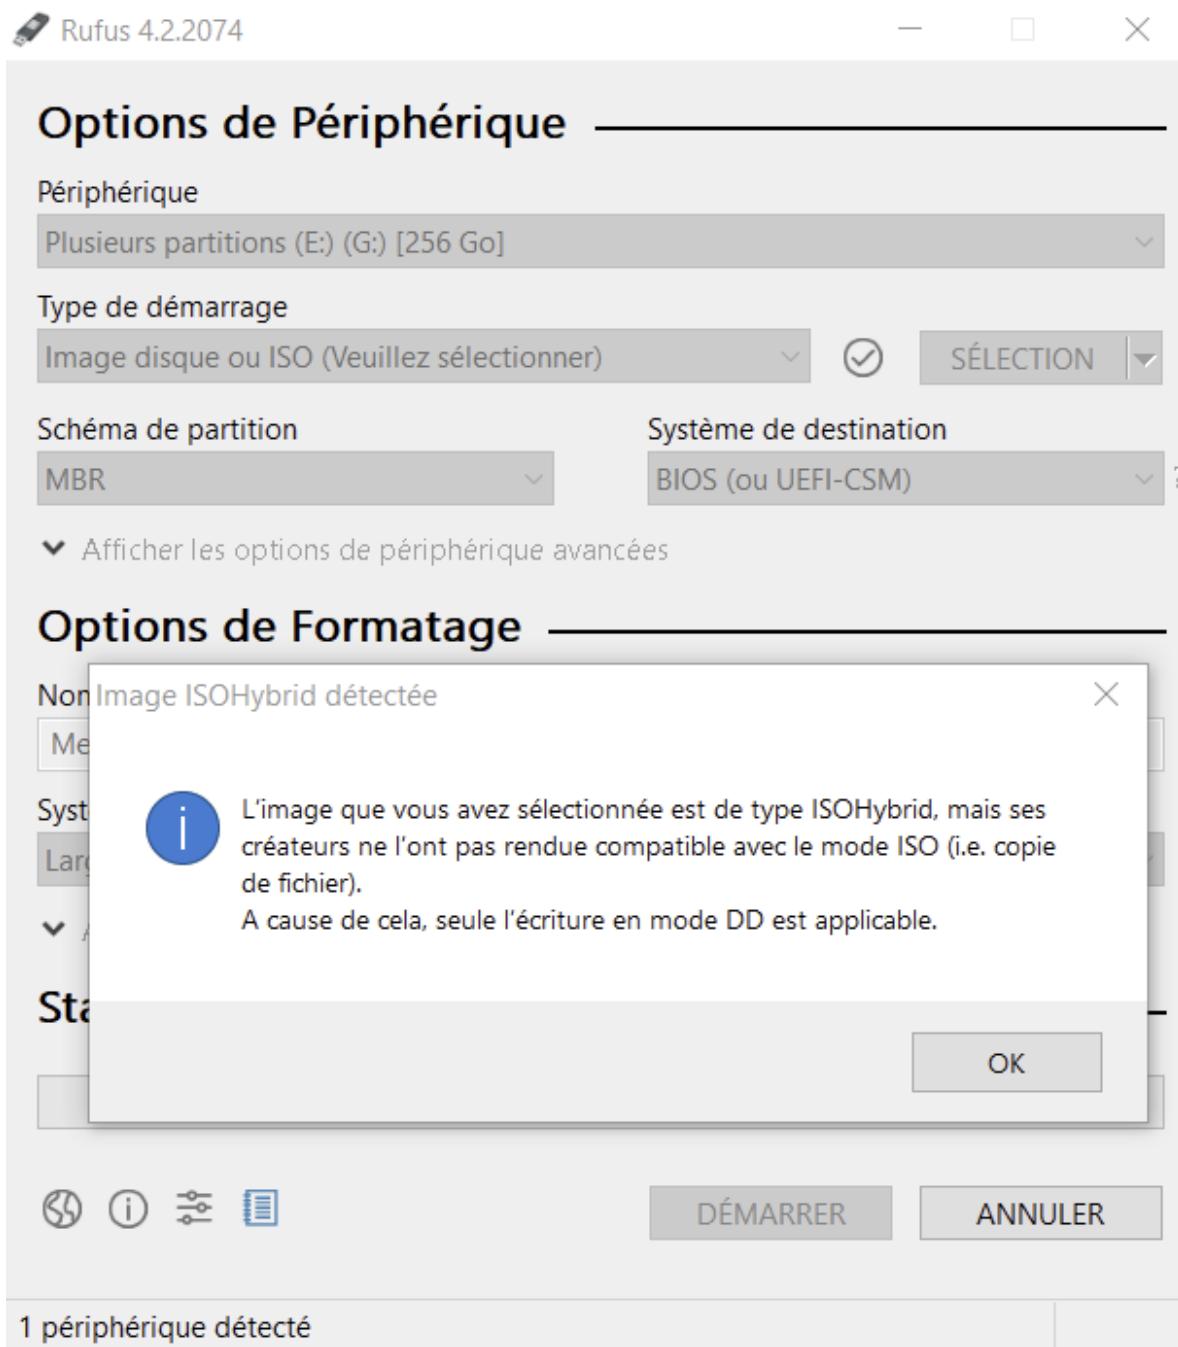

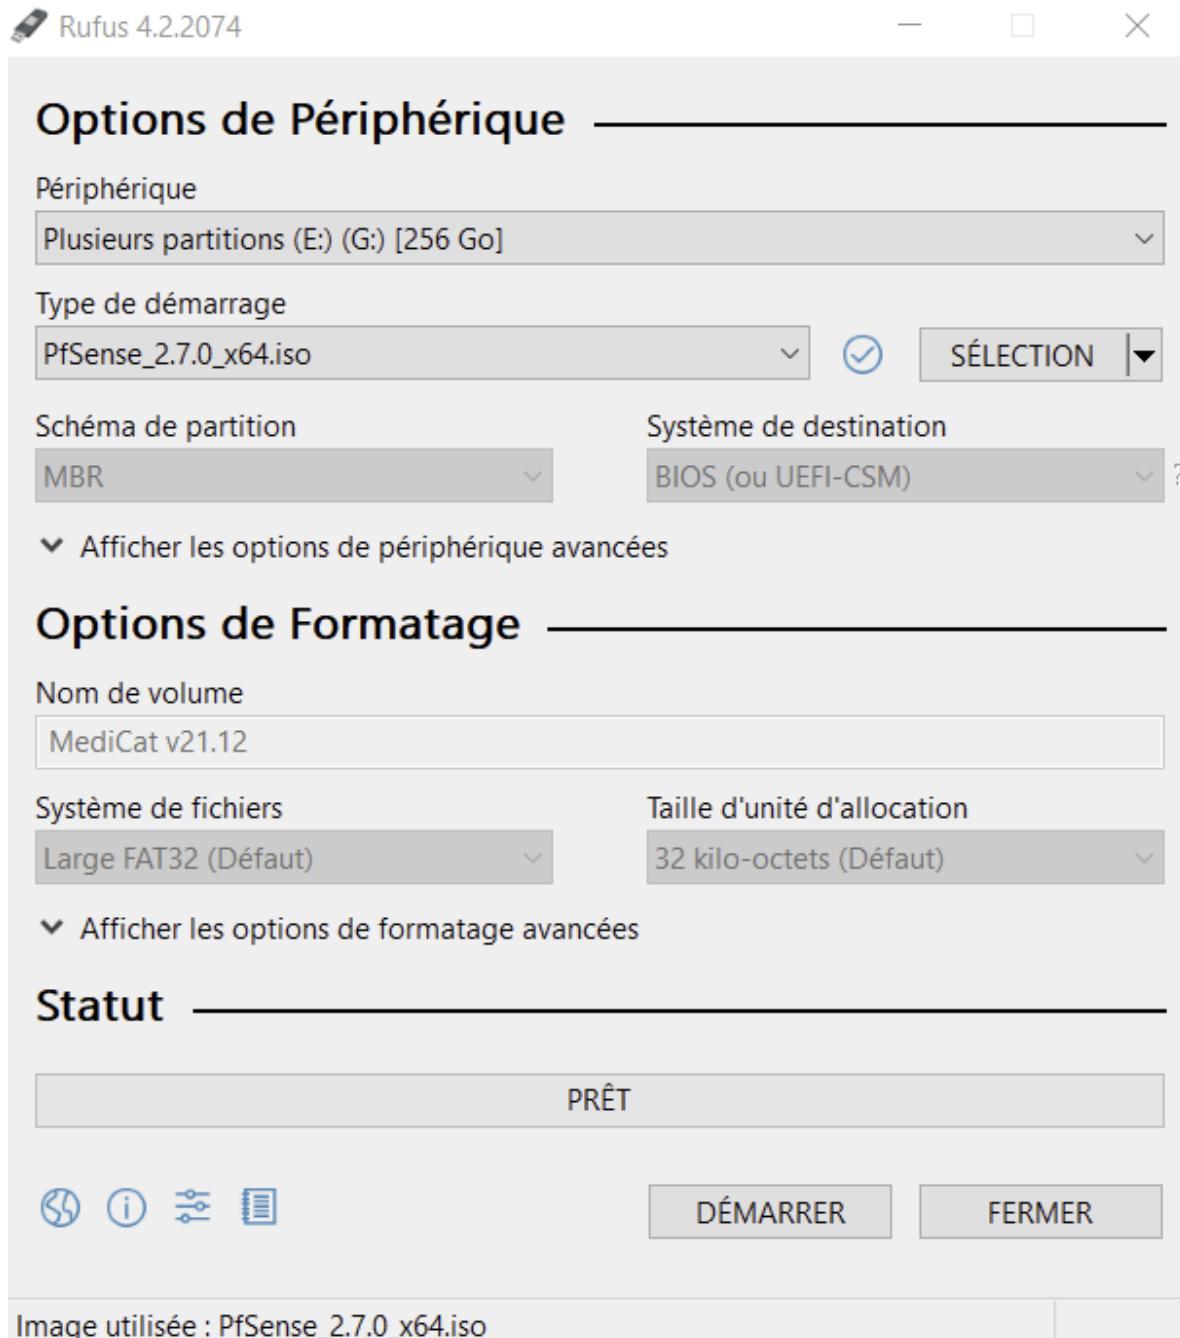


7. Lancez le formatage

Système


1. Branchez la clé USB sur le serveur
2. Démarrez le serveur
3. Appuyez sur F11 pour accéder au boot menu
4. Sélectionnez la clé USB




5. Faites entrer pour démarrer l'installation

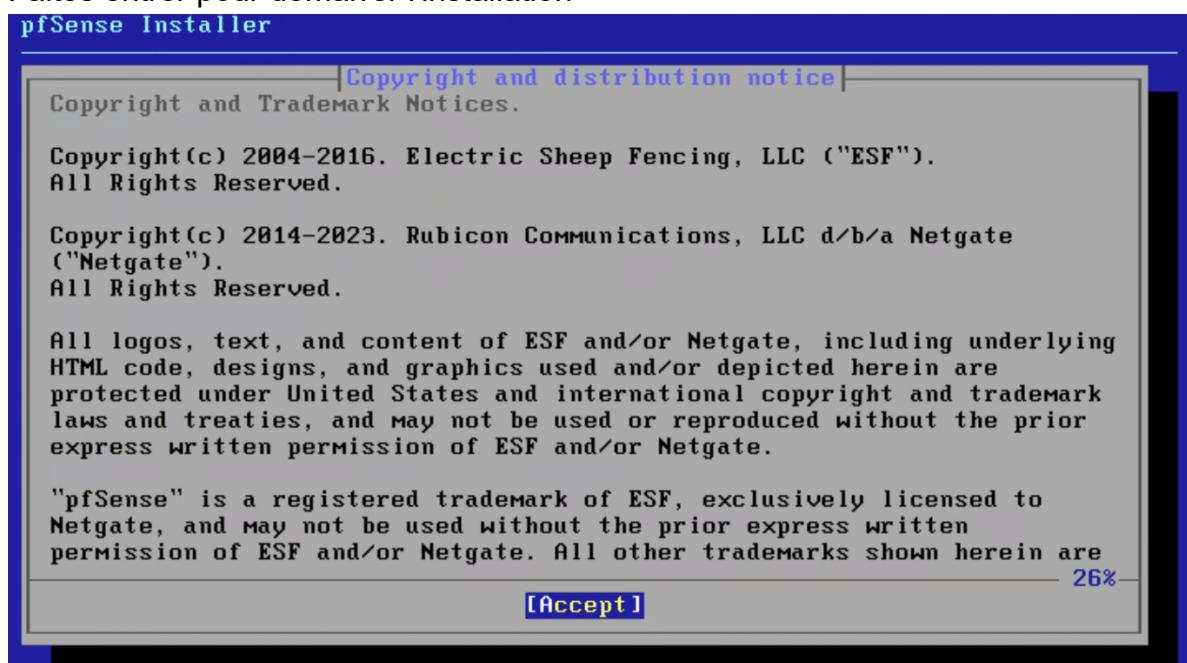

6. Sélectionnez "Install"

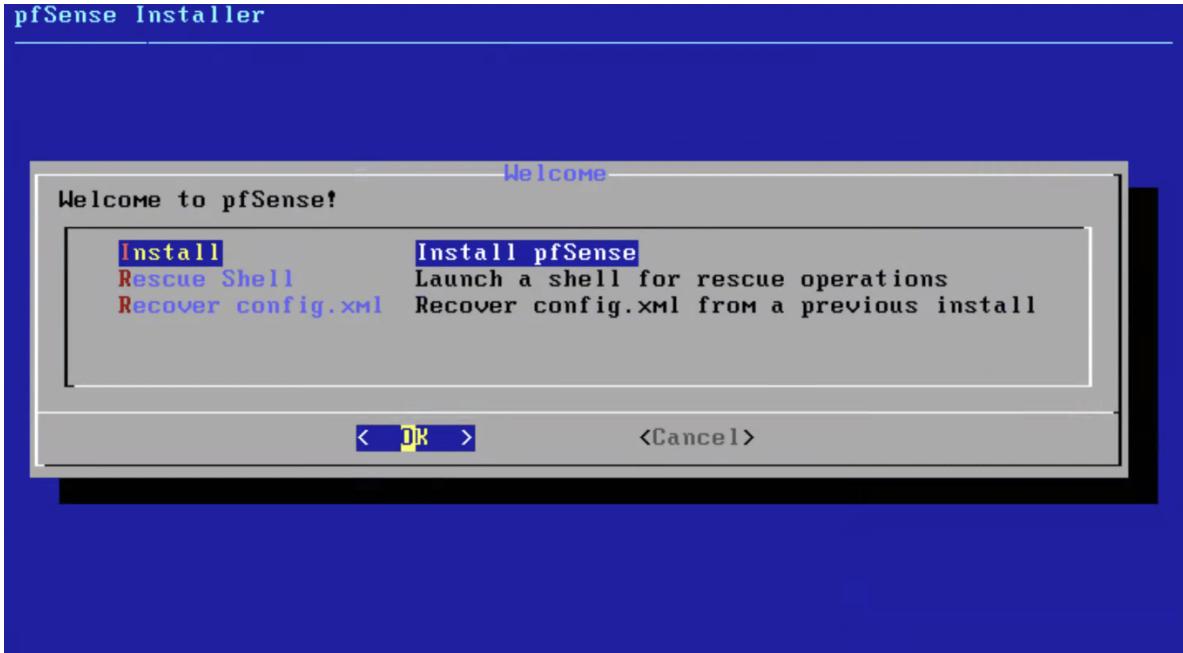


7. Sélectionnez le clavier "Auto (ZFS)"

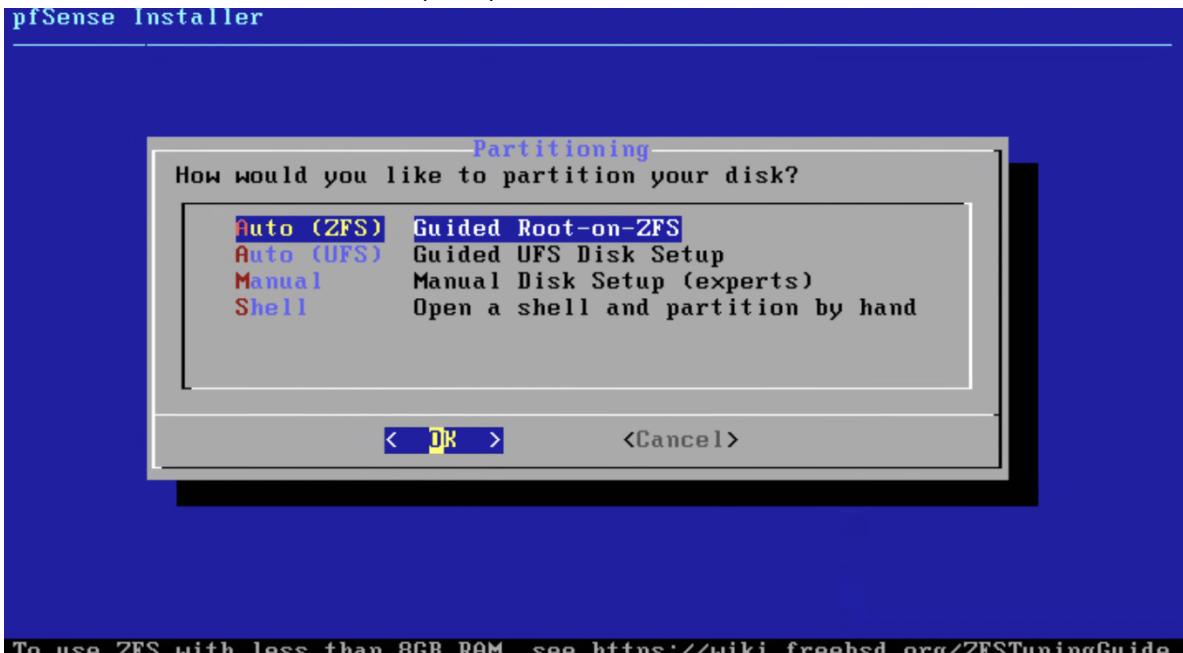


To use ZFS with less than 8GB RAM, see <https://wiki.freebsd.org/ZFSTuningGuide>.

8. Faites entrer pour valider la configuration

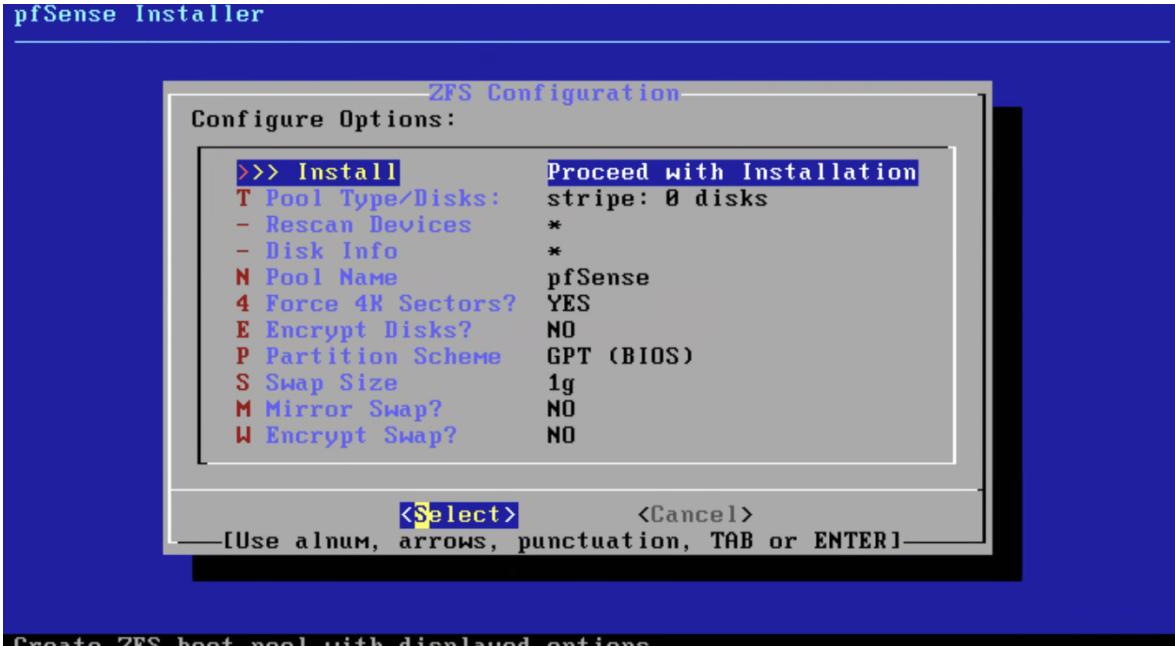


Create ZFS boot pool with displayed options

9. Sélectionnez "Stripe"

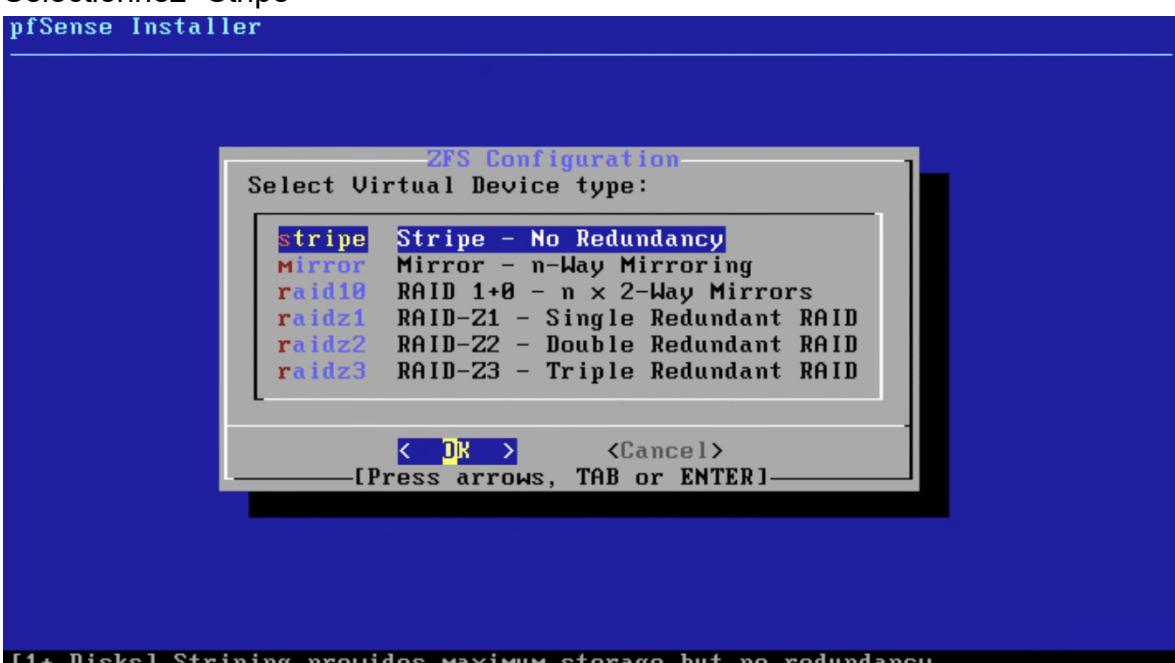


[1+ Disks] Striping provides maximum storage but no redundancy



10. Sélectionnez votre disque (touche espace pour sélectionner), ici "da0"

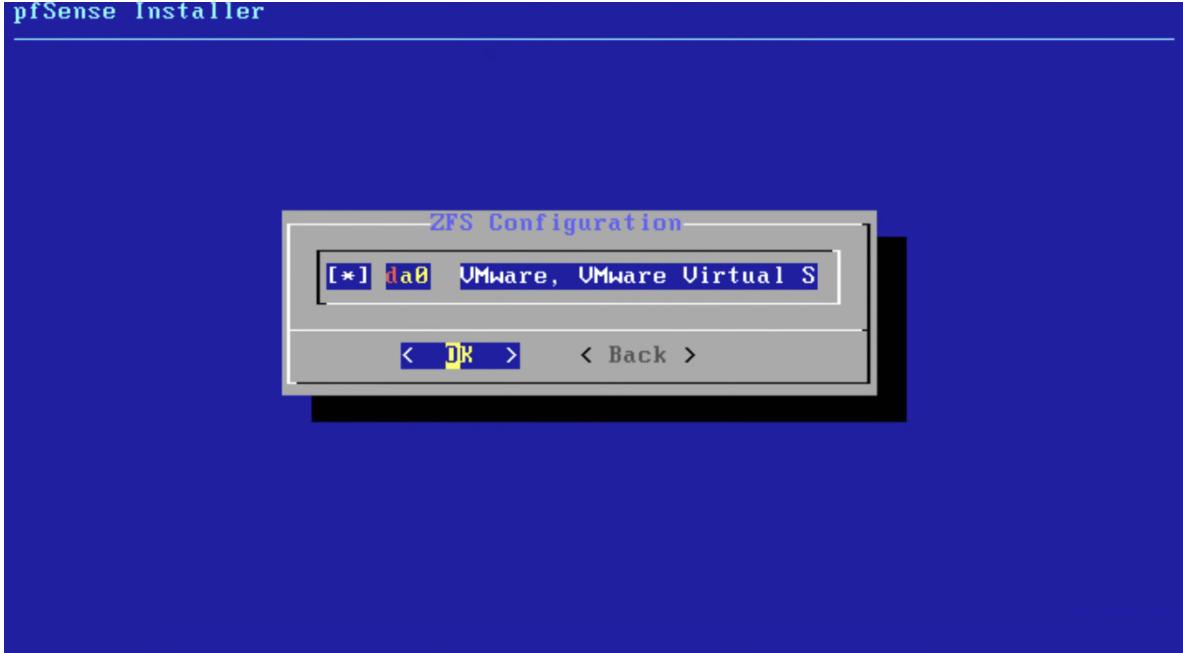

11. Sélectionnez "Yes"

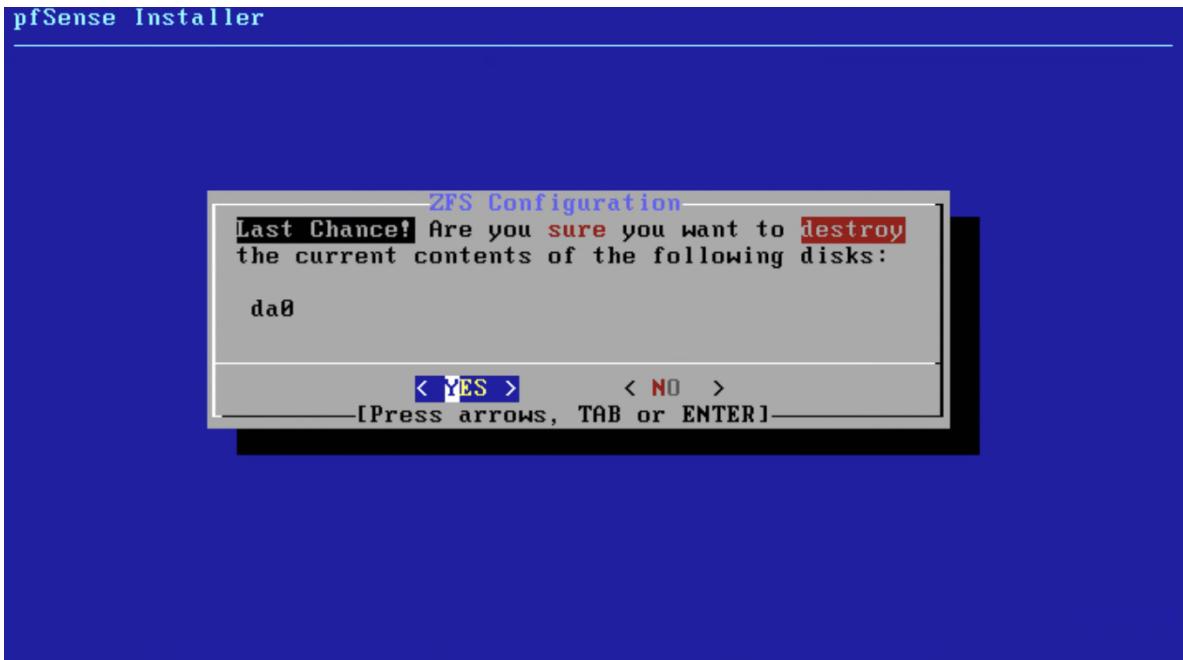

12. L'installation commence, sélectionnez "Reboot" une fois terminé

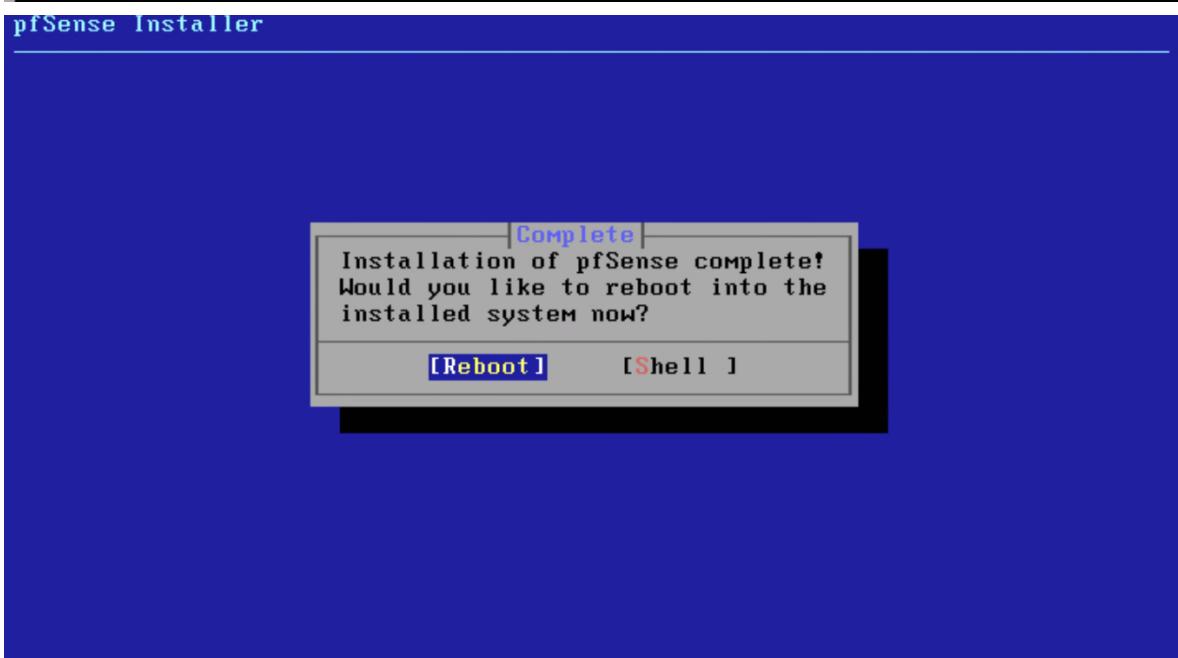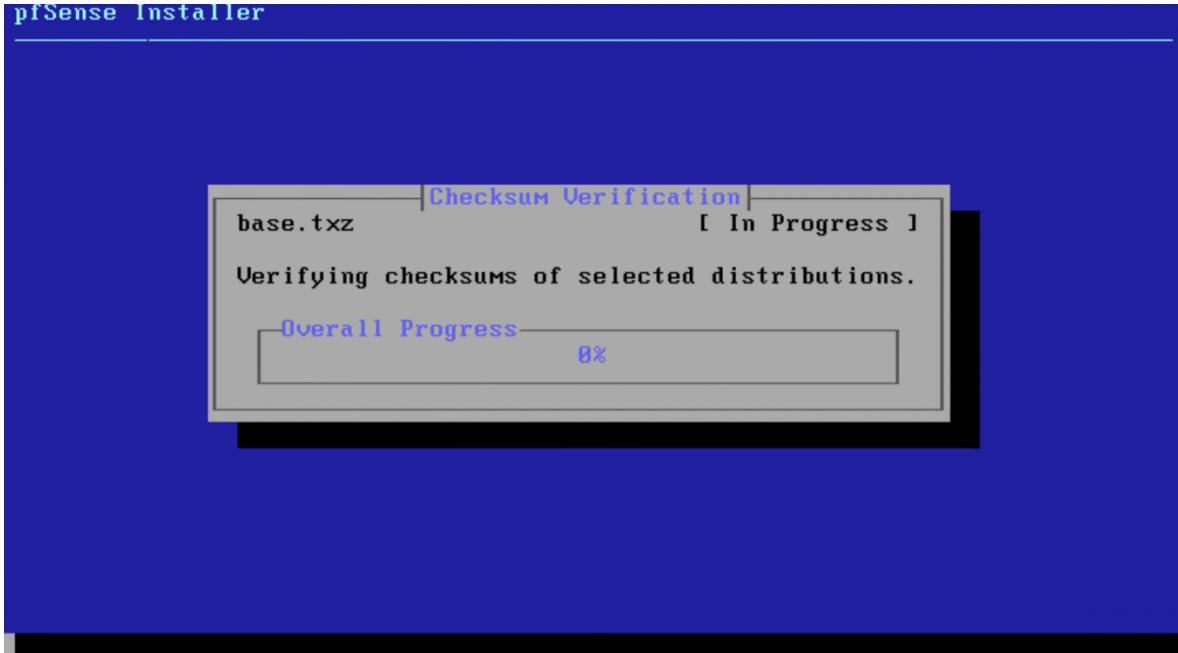

Configuration Interne

0. Laissez le serveur démarrer
1. Faites "a" pour détecter automatiquement l'inteface WAN et LAN, en cas d'erreur, sélectionnez les manuellement
2. Appuyez sur 2 pour configurer l'interface WAN

```
Starting syslog...done.  
Starting CRON... done.  
pfSense 2.7.0-RELEASE amd64 Wed Jun 28 03:53:34 UTC 2023  
Bootup complete  
  
FreeBSD/amd64 (pfSense.home.arpa) (ttyv0)  
  
VMware Virtual Machine - Netgate Device ID: 2ca1a6bddf1395f3152d  
  
*** Welcome to pfSense 2.7.0-RELEASE (amd64) on pfSense ***  
  
WAN (wan)      -> em0      -> v4/DHCP4: 192.168.202.144/24  
LAN (lan)      -> em1      -> v4: 192.168.1.1/24  
  
0) Logout (SSH only)          9) pfTop  
1) Assign Interfaces          10) Filter Logs  
2) Set interface(s) IP address 11) Restart webConfigurator  
3) Reset webConfigurator password 12) PHP shell + pfSense tools  
4) Reset to factory defaults   13) Update from console  
5) Reboot system              14) Enable Secure Shell (sshd)  
6) Halt system                15) Restore recent configuration  
7) Ping host                  16) Restart PHP-FPM  
8) Shell  
  
Enter an option: 2
```

3. Sélectionnez l'interface WAN avec le numéro correspondant (ici 1)

```
Enter an option: 2  
  
Available interfaces:  
  
1 - WAN (em0 - dhcp, dhcp6)  
2 - LAN (em1 - static)  
  
Enter the number of the interface you wish to configure: 1
```

4. Faites "y" pour configurer l'interface WAN en DHCP pour l'IpV4

5. Faites de même pour l'IpV6

```
1 - WAN (em0 - dhcp, dhcp6)  
2 - LAN (em1 - static)  
  
Enter the number of the interface you wish to configure: 1  
  
Configure IPv4 address WAN interface via DHCP? (y/n) y  
  
Configure IPv6 address WAN interface via DHCP6? (y/n) y
```

6. Si demandé, refusez l'http pour le webconfigurator

```

Disabling IPv4 DHCPD...
Disabling IPv6 DHCPD...

Do you want to revert to HTTP as the webConfigurator protocol? (y/n) n

Please wait while the changes are saved to WAN...
    Reloading filter...
    Reloading routing configuration...
    DHCPD...

The IPv4 WAN address has been set to dhcp

The IPv6 WAN address has been set to dhcp6

Press <ENTER> to continue. ■

```

7. Faites "Entrer" pour valider la configuration
8. Appuyez sur 2 pour configurer l'interface LAN
9. Sélectionnez l'interface LAN avec le numéro correspondant (ici 2)

```

*** Welcome to pfSense 2.7.0-RELEASE (amd64) on pfSense ***

WAN (wan)      -> em0      -> v4/DHCP4: 192.168.202.144/24
LAN (lan)      -> em1      -> v4: 192.168.1.1/24

0) Logout (SSH only)          9) pfTop
1) Assign Interfaces          10) Filter Logs
2) Set interface(s) IP address 11) Restart webConfigurator
3) Reset webConfigurator password 12) PHP shell + pfSense tools
4) Reset to factory defaults   13) Update from console
5) Reboot system               14) Enable Secure Shell (sshd)
6) Halt system                 15) Restore recent configuration
7) Ping host                   16) Restart PHP-FPM
8) Shell

Enter an option: 2

Available interfaces:

1 - WAN (em0 - dhcp, dhcp6)
2 - LAN (em1 - static)

Enter the number of the interface you wish to configure: 2

```

10. Faites "n" pour configurer l'interface LAN en statique pour l'IpV4
11. L'adresse LAN est 192.168.1.1
12. Le masque est 24
13. Faites "Entrer" pour la Gateway car c'est le serveur PfSense lui-même

```

Available interfaces:

1 - WAN (em1 - dhcp, dhcp6)
2 - LAN (em0 - static)

Enter the number of the interface you wish to configure: 2

Configure IPv4 address LAN interface via DHCP? (y/n) n

Enter the new LAN IPv4 address. Press <ENTER> for none:
> 192.168.1.1

Subnet masks are entered as bit counts (as in CIDR notation) in pfSense.
e.g. 255.255.255.0 = 24
      255.255.0.0   = 16
      255.0.0.0     = 8

Enter the new LAN IPv4 subnet bit count (1 to 32):
> 24

For a WAN, enter the new LAN IPv4 upstream gateway address.
For a LAN, press <ENTER> for none:
>

```

14. Faites "y" pour configurer l'interface LAN en DHCP pour l'IPv6, la raison étant que nous n'en avons pas besoin en LAN dans cette infrastructure
15. Faites "y" pour configurer le serveur DHCP pour l'IPv4

```

For a WAN, enter the new LAN IPv4 upstream gateway address.
For a LAN, press <ENTER> for none:
>

Configure IPv6 address LAN interface via DHCP6? (y/n) y

Do you want to enable the DHCP server on LAN? (y/n) y

```

16. L'adresse de départ est 192.168.1.2
17. L'adresse de fin est 192.168.1.2
18. Nous gardons cette IP dans le cas où nous aurions besoin d'accéder au serveur PfSense en direct
19. Faites "Entrer" pour valider la configuration

```

Do you want to enable the DHCP server on LAN? (y/n) y
Enter the start address of the IPv4 client address range: 192.168.1.2
Enter the end address of the IPv4 client address range: 192.168.1.5
Disabling IPv6 DHCPD...

Please wait while the changes are saved to LAN...
  Reloading filter...
  Reloading routing configuration...
  DHCPD...

The IPv4 LAN address has been set to 192.168.1.1/24


The IPv6 LAN address has been set to dhcp6

Press <ENTER> to continue.■


```

Configuration GUI


1. Connectez un ordinateur au port LAN du serveur, vous devriez ainsi obtenir l'adresse 192.168.1.2
2. Ouvrez un navigateur
3. Allez sur l'adresse <https://192.168.1.1/>
4. Acceptez et continuez malgré le certificat invalide

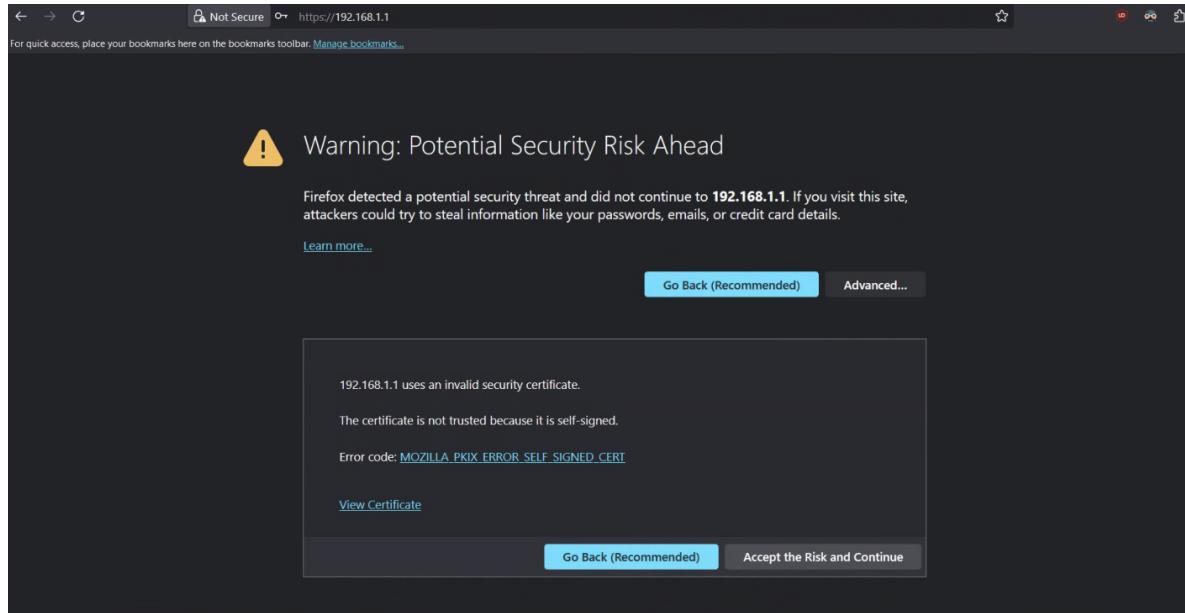


5. Connectez-vous avec les identifiants par défaut (admin/pfsense)

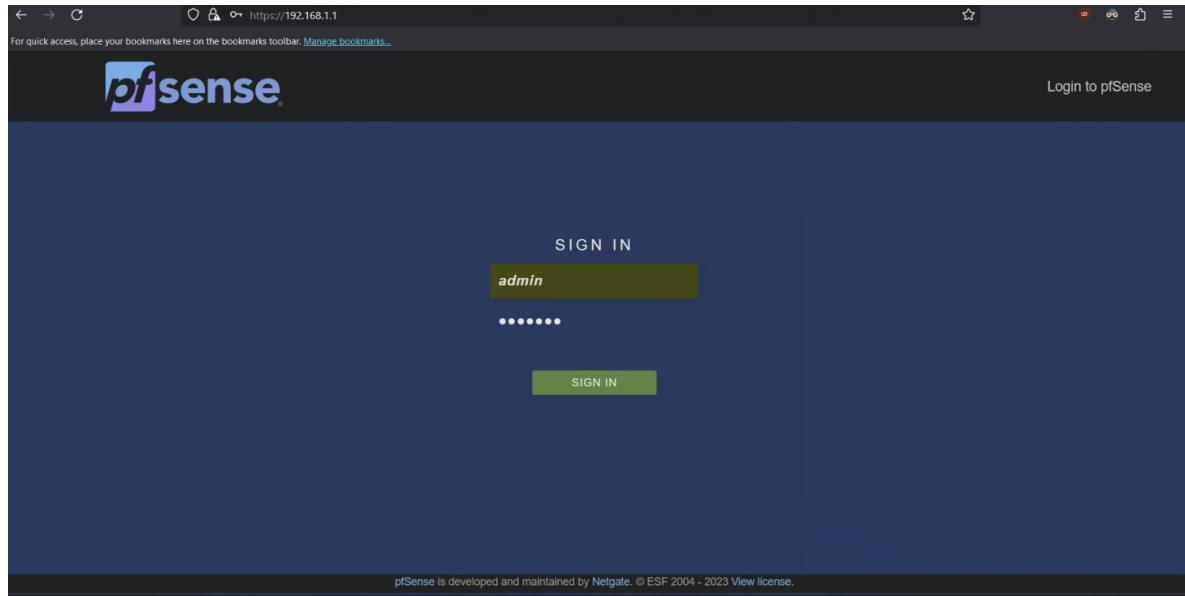

6. Faites "Next"

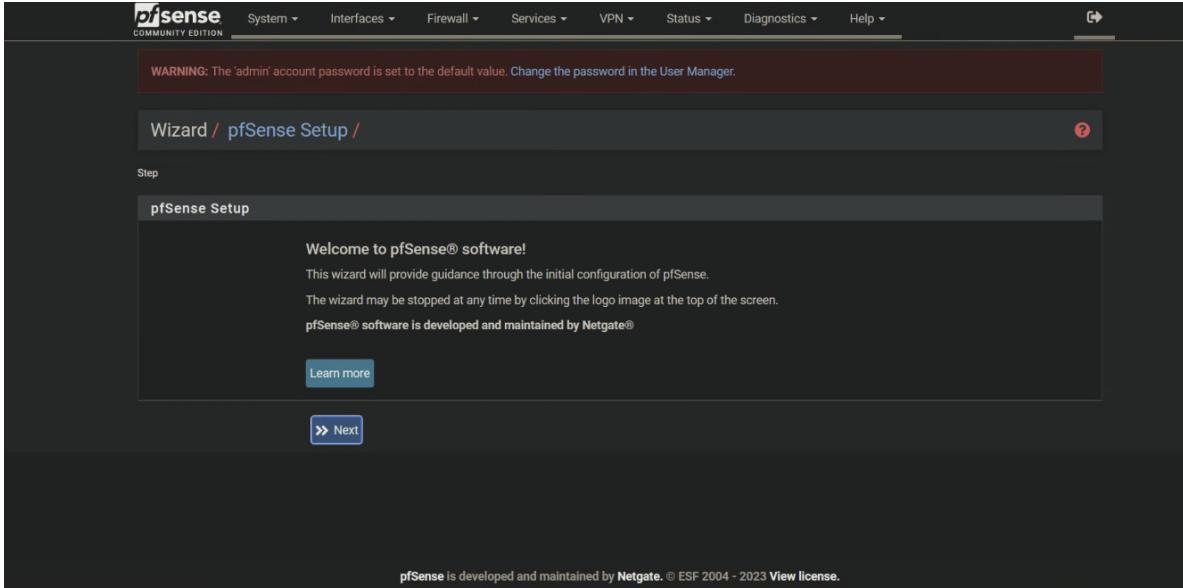

7. Faites "Next"

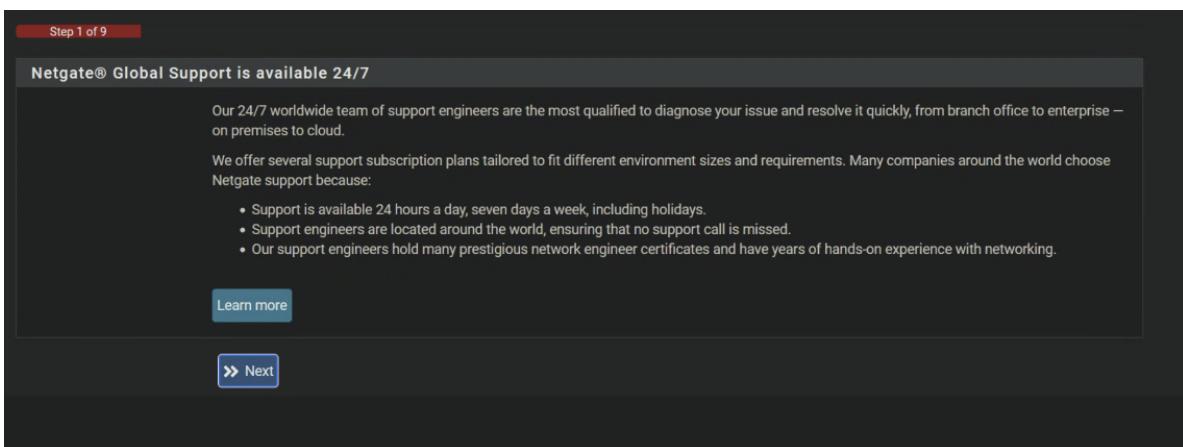

8. Remplissez les informations :

- "Pf-Entreprise" pour le hostname
- "1.1.1.1" pour le DNS principal
- "8.8.8.8" pour le DNS secondaire

9. Faites "Next"

Wizard / pfSense Setup / General Information

Step 2 of 9

General Information

On this screen the general pfSense parameters will be set.

Hostname Pf-WAN
Name of the firewall host, without domain part.
Examples: pfSense, firewall, edgefw

Domain home.arpa
Domain name for the firewall.
Examples: home.arpa, example.com

Do not end the domain name with '.local' as the final part (Top Level Domain, TLD). The 'local' TLD is widely used by mDNS (e.g. Avahi, Bonjour, Rendezvous, Airprint, Airplay) and some Windows systems and networked devices. These will not network correctly if the router uses 'local' as its TLD. Alternatives such as 'home.arpa', 'local.lan', or 'mylocal' are safe.

The default behavior of the DNS Resolver will ignore manually configured DNS servers for client queries and query root DNS servers directly. To use the manually configured DNS servers below for client queries, visit Services > DNS Resolver and enable DNS Query Forwarding after completing the wizard.

Primary DNS Server 1.1.1.1

Secondary DNS Server 8.8.8.8

Override DNS
Allow DNS servers to be overridden by DHCP/PPP on WAN

>> Next

10. Sélectionnez votre fuseau horaire (ici Europe/Paris)

11. Faites "Next"

Wizard / pfSense Setup / Time Server Information

Step 3 of 9

Time Server Information

Please enter the time, date and time zone.

Time server hostname 2.pfsense.pool.ntp.org
Enter the hostname (FQDN) of the time server.

Timezone Europe/Paris

>> Next

12. Faites "Next", aucune modification n'est nécessaire pour le WAN

Wizard / pfSense Setup / Configure WAN Interface

Step 4 of 9

Configure WAN Interface

On this screen the Wide Area Network information will be configured.

SelectedType: DHCP

General configuration

MAC Address:

This field can be used to modify ("spoof") the MAC address of the WAN interface (may be required with some cable connections). Enter a MAC address in the following format: xx:xx:xx:xx:xx:xx or leave blank.

MTU:

Set the MTU of the WAN interface. If this field is left blank, an MTU of 1492 bytes for PPPoE and 1500 bytes for all other connection types will be assumed.

MSS:

If a value is entered in this field, then MSS clamping for TCP connections to the value entered above minus 40 (TCP/IP header size) will be in effect. If this field is left blank, an MSS of 1492 bytes for PPPoE and 1500 bytes for all other connection types will be assumed. This should match the above MTU value in most all cases.

Static IP Configuration

IP Address:

Subnet Mask: 32

Upstream Gateway:

DHCP client configuration

DHCP Hostname:

The value in this field is sent as the DHCP client identifier and hostname when requesting a DHCP lease. Some ISPs may require this (for client identification).

PPPoE configuration

PPPoE Username:

PPPoE Password:

Show PPPoE password: Reveal password characters

PPPoE Service name:
Hint: this field can usually be left empty

PPPoE Dial on demand: Enable Dial-On-Demand mode

PPPoE Service name:

Hint: this field can usually be left empty.

PPPoE Dial on demand: Enable Dial-On-Demand mode
This option causes the interface to operate in dial-on-demand mode, allowing a virtual full time connection. The interface is configured, but the actual connection of the link is delayed until qualifying outgoing traffic is detected.

PPPoE Idle timeout:
If no qualifying outgoing packets are transmitted for the specified number of seconds, the connection is brought down. An idle timeout of zero disables this feature.

PPTP configuration

PPTP Username:

PPTP Password:

Show PPTP password: Reveal password characters

PPTP Local IP Address:

pptplocalsubnet: 32

PPTP Remote IP Address:

PPTP Dial on demand: Enable Dial-On-Demand mode
This option causes the interface to operate in dial-on-demand mode, allowing a virtual full time connection. The interface is configured, but the actual connection of the link is delayed until qualifying outgoing traffic is detected.

PPTP Idle timeout:
If no qualifying outgoing packets are transmitted for the specified number of seconds, the connection is brought down. An idle timeout of zero disables this feature.

RFC1918 Networks

Block RFC1918 Private Networks: Block private networks from entering via WAN
When set, this option blocks traffic from IP addresses that are reserved for private networks as per RFC 1918 (10/8, 172.16/12, 192.168/16) as well as loopback addresses (127/8). This option should generally be left turned on, unless the WAN network lies in such a private address space, too.

Block bogon networks

Block bogon networks: Block non-Internet routed networks from entering via WAN
When set, this option blocks traffic from IP addresses that are reserved (but not RFC 1918) or not yet assigned by IANA. Bogons are prefixes that should never appear in the Internet routing table, and obviously should not appear as the source address in any packets received.

>> Next

13. Faites "Next", aucune modification n'est nécessaire pour le LAN

Wizard / pfSense Setup / Configure LAN Interface

Step 5 of 9

Configure LAN Interface

On this screen the Local Area Network information will be configured.


LAN IP Address: 192.168.1.1
Type dhcp if this interface uses DHCP to obtain its IP address.

Subnet Mask: 24


>> Next

14. Changez le mot de passe de l'admin ("admin" pour l'exemple, mais il se doit d'être sécurisé)


15. Faites "Next"

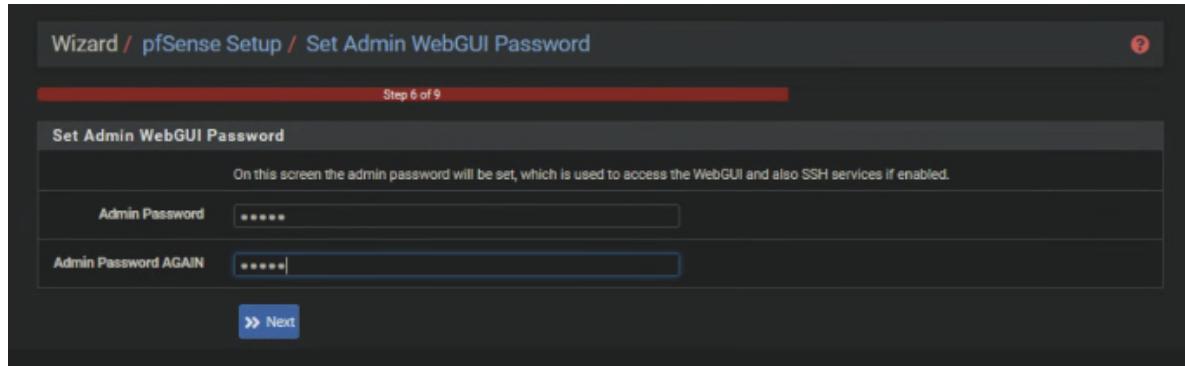


16. Faites "Reload" et attendez que le serveur redémarre

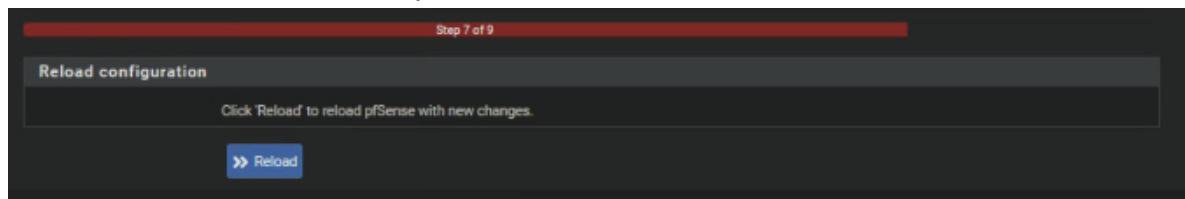


17. Une fois la page rechargée, faites "Check for updates" si l'ISO utilisée est ancienne, sinon faites "Finish"

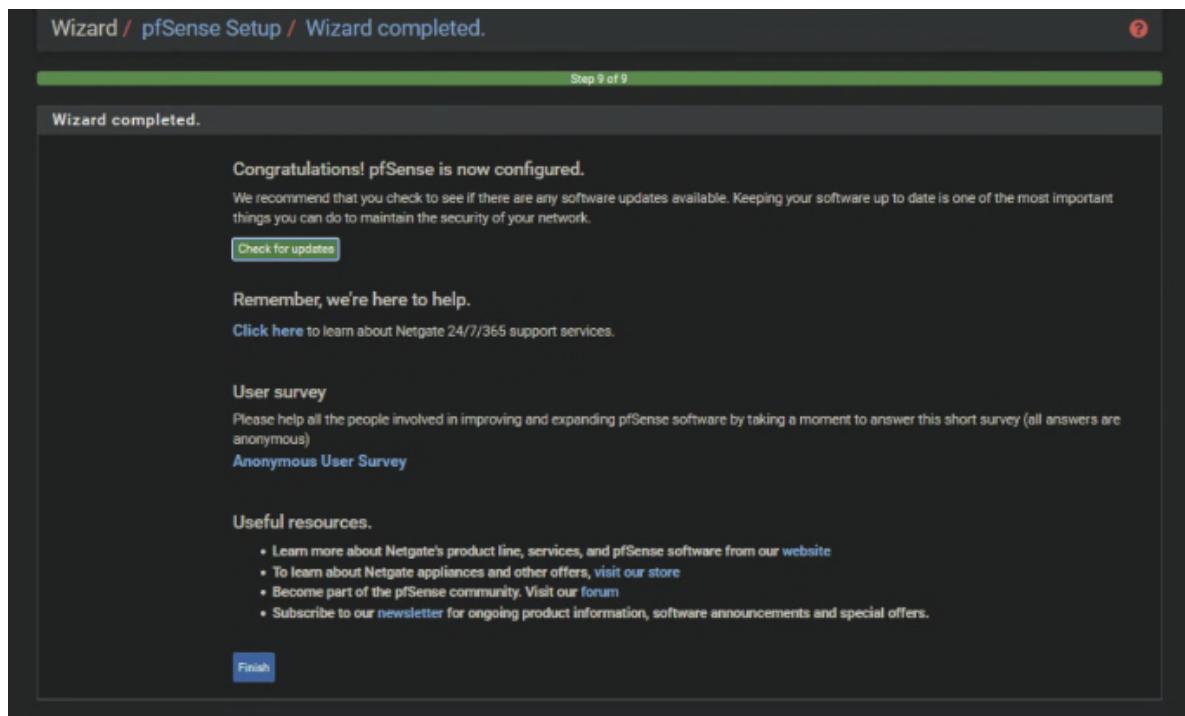

18. Acceptez les conditions d'utilisation

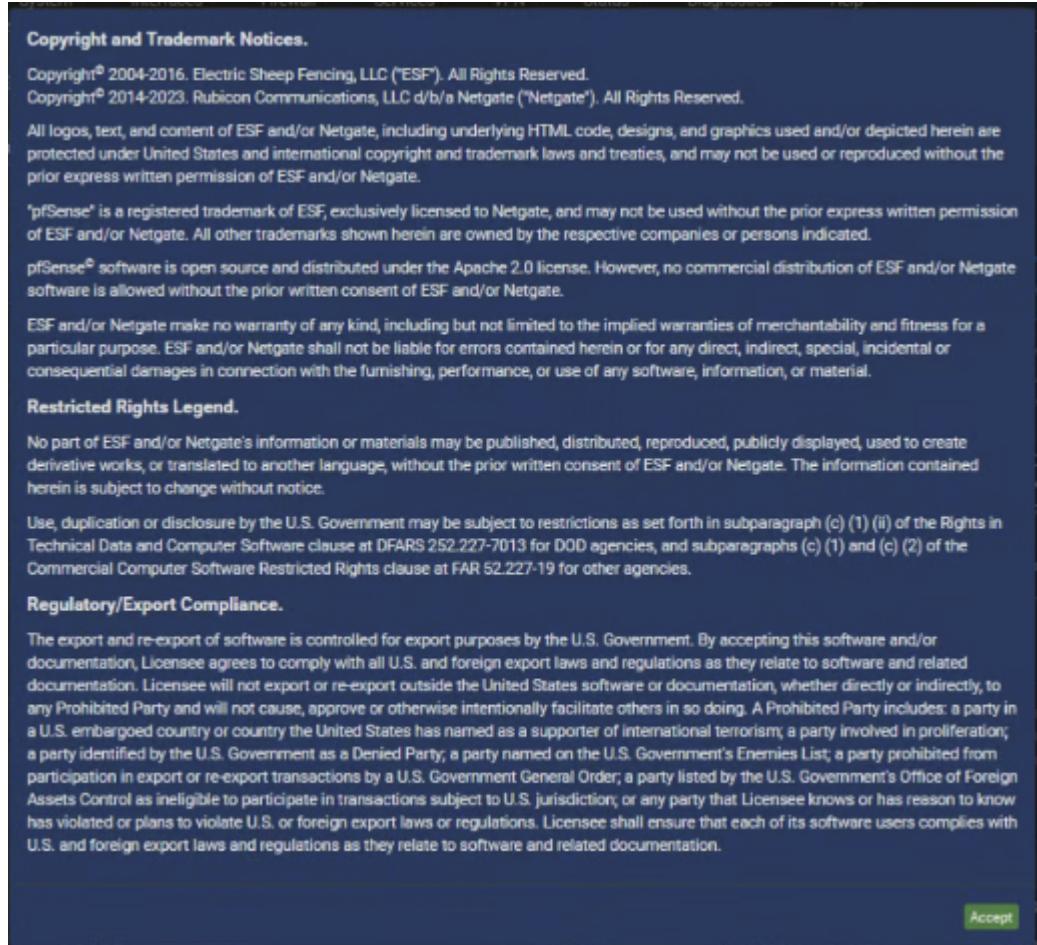


19. Faites "Close"

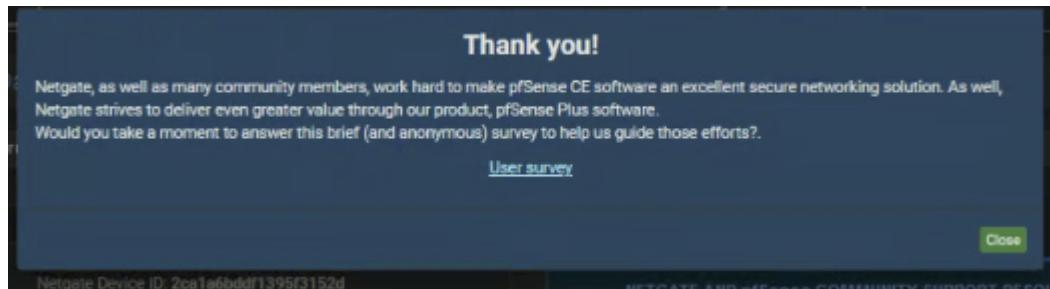

Configuration Interfaces

Configuration VLANs

1. Connectez un ordinateur au port LAN du serveur, vous devriez ainsi obtenir l'adresse 192.168.1.2
2. Ouvrez un navigateur
3. Allez sur l'adresse <https://192.168.1.1/>
4. Connectez-vous avec les identifiants défini (ici admin/admin)

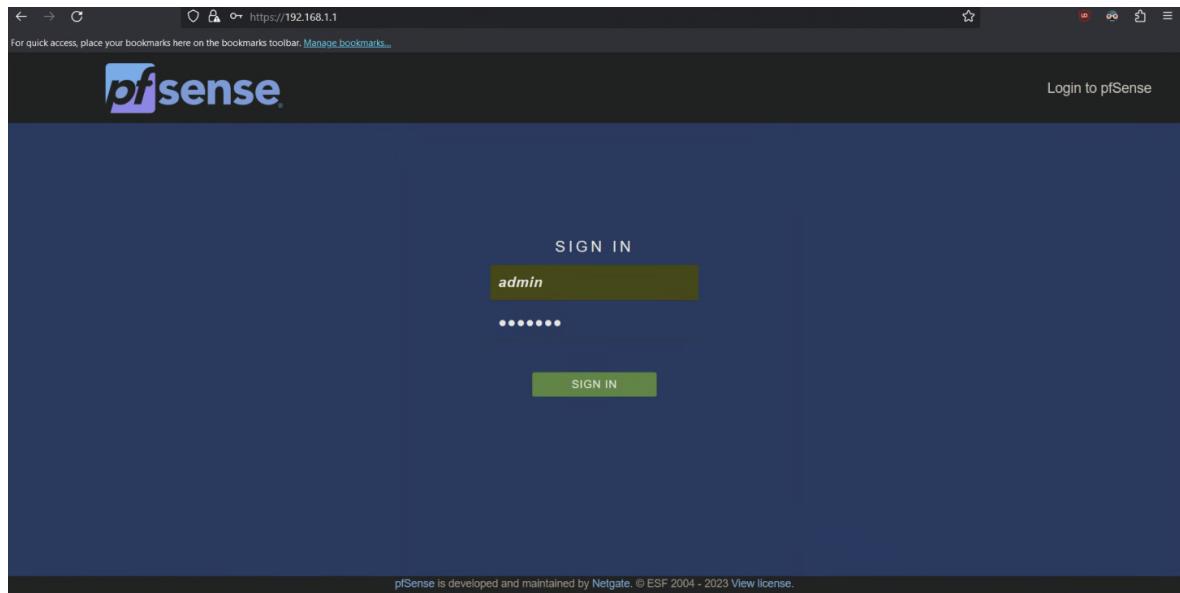

5. Allez dans "Interfaces" > "Assignments"

This screenshot shows the "Interfaces / Assignments" page. The "WAN" interface is assigned to "em1 (00:0c:29:9d:9b:f9)" and the "LAN" interface is assigned to "em0 (00:0c:29:9d:9b:f0)". There are tabs for Interface Assignments, Interface Groups, Wireless, VLANs, QinQs, PPPs, GREs, GIGs, Bridges, and LAGGs. A "Netgate Services And Support" section is also visible.

6. Allez dans "VLANs"

This screenshot shows the "Interfaces / VLANs" page. The "VLANs" tab is selected. The "LAN" interface is assigned to the "em0" port. A message at the bottom states: "Interfaces that are configured as members of a lag(4) interface will not be shown. Wireless interfaces must be created on the Wireless tab before they can be assigned." A "Save" button is visible.

7. Cliquez sur "Add"

This screenshot shows the same "Interfaces / VLANs" page as the previous one, but with the "Add" button highlighted in green. The "VLANs" tab is still selected, and the "LAN" interface is listed under "VLAN tag".

8. Sélectionnez l'interface LAN (ici em0)
9. Entrez le VLAN (ici 100)
10. Entrez une description (ici "Ethernet + Wifi")

11. Faites "Save"

VLAN Configuration

Parent Interface	em0 (00:0c:29:9d:9b:ef) - lan
Only VLAN capable interfaces will be shown.	
VLAN Tag	100
802.1Q VLAN tag (between 1 and 4094).	
VLAN Priority	0
802.1Q VLAN Priority (between 0 and 7).	
Description	Serv1 Light-Snoop
A group description may be entered here for administrative reference (not parsed).	

Save

12. Cliquez sur "Add"

Interfaces / VLANs

Interface	VLAN tag	Priority	Description	Actions
em0 (lan)	100		Serv1 Light-Snoop	

+ Add

13. Sélectionnez l'interface LAN (ici em0)

14. Entrez le VLAN (ici 200)

15. Entrez une description (ici "Wifi Invité")

16. Faites "Save"

VLAN Configuration

Parent Interface	em0 (00:0c:29:9d:9b:ef) - lan
Only VLAN capable interfaces will be shown.	
VLAN Tag	200
802.1Q VLAN tag (between 1 and 4094).	
VLAN Priority	0
802.1Q VLAN Priority (between 0 and 7).	
Description	Serv2 Light-Snoop
A group description may be entered here for administrative reference (not parsed).	

Save

17. Allez dans "Interfaces Assignments"

VLAN Interfaces

Interface	VLAN tag	Priority	Description	Actions
em0 (lan)	100		Serv1 Light-Snoop	
em0 (lan)	200		Serv2 Light-Snoop	

18. Faites "Add"

Interface Assignments

Interface	Network port
WAN	em1 (00:0c:29:9d:9b:f9)
LAN	em0 (00:0c:29:9d:9b:ef)

Available network ports:

Interfaces that are configured as members of a lagg(4) interface will not be shown.
Wireless interfaces must be created on the Wireless tab before they can be assigned.

19. Faites à nouveau "Add"

Interface has been added.

Interface Assignments

Interface	Network port
WAN	em1 (00:0c:29:9d:9b:f9)
LAN	em0 (00:0c:29:9d:9b:ef)
OPT1	VLAN 100 on em0 - lan (Serv1 Light-Snoop)

Available network ports:

Interfaces that are configured as members of a lagg(4) interface will not be shown.
Wireless interfaces must be created on the Wireless tab before they can be assigned.

20. Cliquez sur l'interface OPT1 (VLAN 100)

The screenshot shows the pfSense interface assignments page. At the top, there is a green success message: "Interface has been added." Below the header, there is a navigation bar with tabs: Interface Assignments (which is selected), Interface Groups, Wireless, VLANs, QinQs, PPPs, GREs, GIGs, Bridges, and LAGGs. The main content area displays a table with two columns: "Interface" and "Network port". The table contains four rows:

Interface	Network port
WAN	em1 (00:0c:29:9d:9b:f9)
LAN	em0 (00:0c:29:9d:9b:ef)
OPT1	VLAN 100 on em0 - lan (Serv1 Light-Snoop)
OPT2	VLAN 200 on em0 - lan (Serv2 Light-Snoop)

Each row has a "Delete" button to its right. At the bottom left of the table is a blue "Save" button. Below the table, there is a note: "Interfaces that are configured as members of a lagg(4) interface will not be shown." and another note: "Wireless interfaces must be created on the Wireless tab before they can be assigned."

21. Activez l'interface
22. Passez l'IPv4 en statique
23. Entrez l'adresse IP (ici 192.168.100.254)
24. Précisez le masque (ici 24)
25. Faites "Save"

The screenshot shows the pfSense web interface under the 'Interfaces' section for the 'OPT1 (em0.100)' interface. The 'General Configuration' tab is active.

- Enable:** Enable interface
- Description:** OPT1
Enter a description (name) for the interface here.
- IPv4 Configuration Type:** Static IPv4
- IPv6 Configuration Type:** None
- MAC Address:** xx:xx:xx:xx:xx:xx
The MAC address of a VLAN interface must be set on its parent interface
- MTU:** (dropdown menu)
- MSS:** (dropdown menu)
If a value is entered in this field, then MSS clamping for TCP connections to the value entered above minus 40 for IPv4 (TCP/IPv4 header size) and minus 60 for IPv6 (TCP/IPv6 header size) will be in effect.
- Speed and Duplex:** Default (no preference, typically autoselect)
Explicitly set speed and duplex mode for this interface.
WARNING: MUST be set to autoselect (automatically negotiate speed) unless the port this interface connects to has its speed and duplex forced.

Static IPv4 Configuration

- IPv4 Address:** 192.168.100.254 / 24
- IPv4 Upstream gateway:** None [+ Add a new gateway](#)

If this interface is an Internet connection, select an existing Gateway from the list or add a new one using the "Add" button.
On local area network interfaces the upstream gateway should be 'none'.
Selecting an upstream gateway causes the firewall to treat this interface as a WAN type interface.
Gateways can be managed by [clicking here](#).

Reserved Networks

- Block private networks and loopback addresses:**
Blocks traffic from IP addresses that are reserved for private networks per RFC 1918 (10/8, 172.16/12, 192.168/16) and unique local addresses per RFC 4193 (fc00::/7) as well as loopback addresses (127/8). This option should generally be turned on, unless this network interface resides in such a private address space, too.
- Block bogon networks:**
Blocks traffic from reserved IP addresses (but not RFC 1918) or not yet assigned by IANA. Bogons are prefixes that should never appear in the Internet routing table, and so should not appear as the source address in any packets received.
This option should only be used on external interfaces (WANs), it is not necessary on local interfaces and it can potentially block required local traffic.
Note: The update frequency can be changed under System > Advanced, Firewall & NAT settings.

[Save](#)

26. Retournez dans "Interfaces" > "Assignments"

The OPT1 configuration has been modified. The changes must be applied to take effect. Don't forget to adjust the DHCP after applying.

Enable interface

Description: OPT1
Enter a description (name) for the interface here.

IPv4 Configuration Type: Static IPv4

IPv6 Configuration Type: None

MAC Address: XX:XX:XX:XX:XX:XX
The MAC address of a VLAN interface must be set on its parent interface

MTU: 1500
If this field is blank, the adapter's default MTU will be used. This is typically 1500 bytes but can vary in some circumstances.

MSS: 1460
If a value is entered in this field, then MSS clamping for TCP connections to the value entered above minus 40 for IPv4 (TCP/IPv4 header size) and minus 60 for IPv6 (TCP/IPv6 header size) will be in effect.

Speed and Duplex: Default (no preference, typically autoselect)
Explicitly set speed and duplex mode for this interface.
WARNING: MUST be set to autoselect (automatically negotiate speed) unless the port this interface connects to has its speed and duplex forced.

Static IPv4 Configuration

IPv4 Address: 192.168.100.254 / 24
IPv4 Upstream gateway: None
+ Add a new gateway

If this interface is an Internet connection, select an existing Gateway from the list or add a new one using the 'Add' button.
On local area network interfaces the upstream gateway should be 'none'.
Selecting an upstream gateway causes the firewall to treat this interface as a WAN type interface.
Gateways can be managed by clicking here.

Reserved Networks

Block private networks and loopback addresses
Blocks traffic from IP addresses that are reserved for private networks per RFC 1918 (10/8, 172.16/12, 192.168/16) and unique local addresses per RFC 4193 (fc00::/7) as well as loopback addresses (127/8). This option should generally be turned on, unless this network interface resides in such a private address space, too.

Block bogon networks
Blocks traffic from reserved IP addresses (but not RFC 1918) or not yet assigned by IANA. Bogons are prefixes that should never appear in the Internet routing table, and so should not appear as the source address in any packets received.
This option should only be used on external interfaces (WANs), it is not necessary on local interfaces and it can potentially block required local traffic.
Note: The update frequency can be changed under System > Advanced, Firewall & NAT settings.

Save

27. Cliquez sur l'interface OPT2 (VLAN 200)

Interface	Network port
WAN	em1 (00:0c:29:9d:9b:f9)
LAN	em0 (00:0c:29:9d:9b:ef)
OPT1	VLAN 100 on em0 - lan (Serv1 Light-Snoop)
OPT2	VLAN 200 on em0 - lan (Serv2 Light-Snoop)

Save

Interfaces that are configured as members of a lag(4) interface will not be shown.
Wireless interfaces must be created on the Wireless tab before they can be assigned.

28. Activez l'interface

29. Passez l'IPv4 en statique
30. Entrez l'adresse IP (ici 192.168.200.254)
31. Précisez le masque (ici 24)
32. Faites "Save"

The OPT2 configuration has been changed.
The changes must be applied to take effect.
Don't forget to adjust the DHCP Server range if needed after applying.

Enable interface

Description: OPT2
Enter a description (name) for the interface here.

IPv4 Configuration Type: Static IPv4

IPv6 Configuration Type: None

MAC Address: 00:0C:XX:XX:XX:XX
The MAC address of a VLAN interface must be set on its parent interface.

MTU:
If this field is blank, the adapter's default MTU will be used. This is typically 1500 bytes but can vary in some circumstances.

MSS:
If a value is entered in this field, then MSS clamping for TCP connections to the value entered above minus 40 for IPv4 (TCP/IP header size) and minus 60 for IPv6 (TCP/IPv6 header size) will be in effect.

Speed and Duplex: Default (no preference, typically autoselect)
Explicitly set speed and duplex mode for this interface.
WARNING: MUST be set to autoselect (automatically negotiate speed) unless the port this interface connects to has its speed and duplex forced.

Static IPv4 Configuration

IPv4 Address: 192.168.200.254 / 24

IPv4 Upstream gateway: None [+ Add a new gateway](#)

If this interface is an Internet connection, select an existing Gateway from the list or add a new one using the "Add" button.
On local area network interfaces the upstream gateway should be "none".
Selecting an upstream gateway causes the firewall to treat this interface as a WAN type interface.
Gateways can be managed by [clicking here](#).

Reserved Networks

Block private networks and loopback addresses
Blocks traffic from IP addresses that are reserved for private networks per RFC 1918 (10/8, 172.16/12, 192.168/16) and unique local addresses per RFC 4193 (fc00::/7) as well as loopback addresses (127/8). This option should generally be turned on, unless this network interface resides in such a private address space, too.

Block bogon networks
Blocks traffic from reserved IP addresses (but not RFC 1918) or not yet assigned by IANA. Bogons are prefixes that should never appear in the Internet routing table, and so should not appear as the source address in any packets received.
This option should only be used on external interfaces (WANs), it is not necessary on local interfaces and it can potentially block required local traffic.
Note: The update frequency can be changed under System > Advanced, Firewall & NAT settings.

[Save](#)

Configuration DHCP

1. Allez dans "Services" > "DHCP Server"

The screenshot shows the pfSense interface under the 'Interfaces / OPT2 (em0.200)' tab. In the top right corner, there is a green 'Apply Changes' button.

General Configuration:

- Enable:
- Description: OPT2
- IPv4 Configuration Type: Static IPv4
- IPv6 Configuration Type: None
- MAC Address: XX:XX:XX:XX:XX:XX
- MTU: (blank)
- MSS: (blank)
- Speed and Duplex: Default (no preference, typically autoselect)

Static IPv4 Configuration:

- IPv4 Address: 192.168.200.254
- IPv4 Upstream gateway: None

Reserved Networks:

- Block private networks and loopback addresses: (description: Blocks traffic from IP addresses that are reserved for private networks per RFC 1918 (10/8, 172.16/12, 192.168/16) and unique local addresses per RFC 4193 (fc00::/7) as well as loopback addresses (127/8). This option should generally be turned on, unless this network interface resides in such a private address space, too.)
- Block bogon networks: (description: Blocks traffic from reserved IP addresses (but not RFC 1918) or not yet assigned by IANA. Bogons are prefixes that should never appear in the Internet routing table, and so should not appear as the source address in any packets received. This option should only be used on external interfaces (WANs), it is not necessary on local interfaces and it can potentially block required local traffic. Note: The update frequency can be changed under System > Advanced, Firewall & NAT settings.)

Save button at the bottom.

2. Allez dans "OPT1"

The screenshot shows the pfSense interface under the 'Services / DHCP Server / LAN' tab. The 'OPT1' tab is selected. In the top right corner, there is a green 'Save' button.

General Options:

- Enable:
- BOOTP: Ignore BOOTP queries
- Deny unknown clients: Allow all clients

Advanced Options:

- Ignore denied clients: Ignore denied clients rather than reject

3. Activez le serveur DHCP

4. Entrez le range d'adresse (ici 192.168.100.1 - 192.168.100.5, adaptez en fonction de vos besoins, si vous avez plus d'ordinateurs et autres appareils ou que vous allez augmenter votre parc, augmentez le range. Préférez prendre une range

adaptée avec une petite marge pour minimiser les risques)

5. Faites "Save"

6. Allez dans "OPT2"

7. Activez le serveur DHCP

8. Entrez le range d'adresse (ici 192.168.200.1 - 192.168.200.254, la range est plus grande car nous ne savons pas combien d'appareils vont se connecter au Wifi invité et que celui-ci sera plus contrôlé)

9. Faites "Save"

General Options

- Enable:** Enable DHCP server on OPT2 interface
- BOOTP:** Ignore BOOTP queries
- Deny unknown clients:** Allow all clients

When set to Allow all clients, any DHCP client will get an IP address within this scope/range on this interface. If set to Allow known clients from any interface, any DHCP client with a MAC address listed in a static mapping on **any** scope(s)/interface(s) will get an IP address. If set to Allow known clients from **only this interface**, only MAC addresses listed in static mappings on this interface will get an IP address within this scope/range.
- Ignore denied clients:** Ignore denied clients rather than reject

This option is not compatible with failover and cannot be enabled when a Failover Peer IP address is configured.
- Ignore client identifiers:** Do not record a unique identifier (UID) in client lease data if present in the client DHCP request

This option may be useful when a client can dual boot using different client identifiers but the same hardware (MAC) address. Note that the resulting server behavior violates the official DHCP specification.
- Subnet:** 192.168.200.0
- Subnet mask:** 255.255.255.0
- Available range:** 192.168.200.1 - 192.168.200.254
- Range:** From 192.168.200.1 To 192.168.200.9

Additional Pools

Add + Add pool

If additional pools of addresses are needed inside of this subnet outside the above Range, they may be specified here.

Configuration Firewall

1. Allez dans "Firewall" > "Rules"

The changes have been applied successfully.

2. Allez dans "OPT1"

Rules (Drag to Change Order)

States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
X 0/5 KIB	*	RFC 1918 networks	*	*	*	*	*		Block private networks	
X 0/0 B	*	Reserved	*	*	*	*	*		Block bogon networks	

No rules are currently defined for this interface
All incoming connections on this interface will be blocked until pass rules are added. Click the button to add a new rule.

Add Add Delete Toggle Copy Save Separator

3. Faites "Add"

The screenshot shows the pfSense Firewall / Rules / OPT1 interface. At the top, there are tabs for Floating, WAN, LAN, OPT1 (which is selected), and OPT2. Below the tabs is a header row with columns: States, Protocol, Source, Port, Destination, Port, Gateway, Queue, Schedule, Description, and Actions. A message in the center states: "No rules are currently defined for this interface. All incoming connections on this interface will be blocked until pass rules are added. Click the button to add a new rule." Below this message are several action buttons: Add (green), Delete (red), Toggle (blue), Copy (light blue), Save (blue), and Separator (orange). There is also a small information icon in the bottom-left corner.

4. Changer le "Protocol" en "Any"
5. Changer la "Source" en "OPT1 net"
6. Mettez "Default allow LAN to any rule" en description
7. Faites "Save"

The screenshot shows the pfSense Firewall / Rules / Edit interface. The title bar says "Edit Firewall Rule". The form has the following fields:

- Action:** Pass (selected)
- Disabled:** Disable this rule
- Interface:** OPT1
- Address Family:** IPv4
- Protocol:** Any
- Source:** Source: OPT1 net, Invert match:
- Destination:** Destination: any, Invert match:
- Extra Options:**
 - Log:** Log packets that are handled by this rule
 - Description:** Default allow LAN to any rule
- Advanced Options:** Display Advanced

At the bottom right is a "Save" button.

8. Faites "Add"

The firewall rule configuration has been changed.
The changes must be applied for them to take effect.

Rules (Drag to Change Order)

States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
✓ 0/0 B	IPv4 *	OPT1 net	*	*	*	*	none		Default allow LAN to any rule	

Actions: Add Add Delete Toggle Copy Save Separator

9. Changer l' "Address Family" en "IPv6"
10. Changer le "Protocol" en "Any"
11. Changer la "Source" en "OPT1 net"
12. Mettez "Default allow LAN to any rule" en description
13. Faites "Save"

Edit Firewall Rule

Action: Pass

Choose what to do with packets that match the criteria specified below.
Hint: the difference between block and reject is that with reject, a packet (TCP/RST or ICMP port unreachable for UDP) is returned to the sender, whereas with block the packet is dropped silently. In either case, the original packet is discarded.

Disabled: Disable this rule
Set this option to disable this rule without removing it from the list.

Interface: OPT1
Choose the interface from which packets must come to match this rule.

Address Family: IPv6
Select the Internet Protocol version this rule applies to.

Protocol: Any
Choose which IP protocol this rule should match.

Source

Source: Invert match OPT1 net Source Address: /

Destination

Destination: Invert match any Destination Address: /

Extra Options

Log: Log packets that are handled by this rule
Hint: the firewall has limited local log space. Don't turn on logging for everything. If doing a lot of logging, consider using a remote syslog server (see the Status: System Logs: Settings page).

Description: Default allow LAN to any rule
A description may be entered here for administrative reference. A maximum of 52 characters will be used in the ruleset and displayed in the firewall log.

Advanced Options

14. Allez dans "OPT2"

The firewall rule configuration has been changed.
The changes must be applied for them to take effect.

Apply Changes

Floating	WAN	LAN	OPT1	OPT2						
Rules (Drag to Change Order)										
States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
<input type="checkbox"/>	✓ 0/0 B	IPv6 *	OPT1 net	*	*	*	*	none	Default allow LAN to any rule	
<input type="checkbox"/>	✓ 0/0 B	IPv4 *	OPT1 net	*	*	*	*	none	Default allow LAN to any rule	

Add **Up** **Down** **Delete** **Toggle** **Copy** **Save** **Separator**

15. Faites "Add"

The screenshot shows the pfSense Firewall / Rules / OPT2 configuration interface. At the top, there's a message box stating: "The firewall rule configuration has been changed. The changes must be applied for them to take effect." To the right of this message is a green "Apply Changes" button with a checkmark icon. Below the message box is a navigation bar with tabs: Floating, WAN, LAN, OPT1, and OPT2, where OPT2 is currently selected. Under the "Rules (Drag to Change Order)" section, there are columns for States, Protocol, Source, Port, Destination, Port, Gateway, Queue, Schedule, Description, and Actions. A note below the table states: "No rules are currently defined for this interface. All incoming connections on this interface will be blocked until pass rules are added. Click the button to add a new rule." At the bottom, there are several action buttons: Add (green), Add (green), Delete (red), Toggle (blue), Copy (blue), Save (blue), and Separator (orange).

16. Changer le "Protocol" en "Any"
 17. Changer la "Source" en "OPT2 net"
 18. Mettez "Default allow LAN to any rule" en description
 19. Faites "Save"

The screenshot shows the 'Edit Firewall Rule' configuration page. The 'Action' is set to 'Pass'. The 'Disabled' checkbox is unchecked. The 'Interface' is set to 'OPT2'. The 'Address Family' is set to 'IPv4'. The 'Protocol' is set to 'Any'. In the 'Source' section, the 'Source' dropdown is set to 'OPT2 net'. In the 'Destination' section, the 'Destination' dropdown is set to 'any'. Under 'Extra Options', the 'Log' checkbox is unchecked. The 'Description' field contains 'Default allow LAN to any rule'. A 'Display Advanced' button is visible. At the bottom is a 'Save' button.

20. Faites "Add"

The screenshot shows the 'Firewall / Rules / OPT2' page. A message at the top says 'The firewall rule configuration has been changed. The changes must be applied for them to take effect.' A green 'Apply Changes' button is visible. Below is a table of rules:

	States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
<input type="checkbox"/>	0/0 B	IPv4 *	OPT2 net	*	*	*	*	none		Default allow LAN to any rule	

At the bottom are buttons for 'Add', 'Delete', 'Toggle', 'Copy', 'Save', and 'Separator'.

21. Changer l' "Address Family" en "IPv6"

22. Changer le "Protocol" en "Any"

23. Changer la "Source" en "OPT2 net"

24. Mettez "Default allow LAN to any rule" en description

25. Faites "Save"

The screenshot shows the 'Edit Firewall Rule' page in the pfSense web interface. The rule being configured is as follows:

- Action:** Pass
- Disabled:** Disable this rule
- Interface:** OPT2
- Address Family:** IPv6
- Protocol:** Any
- Source:** Source: OPT2 net, Destination: any
- Extra Options:**
 - Log:** Log packets that are handled by this rule
 - Description:** Default allow LAN to any rule
- Advanced Options:** [Display Advanced](#)


A blue 'Save' button is at the bottom left.

26. Redémarrez le serveur PfSense pour que tout les changements soient pris en compte : "Diagnostics" > "Reboot"

The screenshot shows the 'Firewall / Rules / OPT2' page. A message box states: 'The firewall rule configuration has been changed. The changes must be applied for them to take effect.' To the right, a sidebar lists various diagnostic tools, and a green 'Apply Changes' button is visible.

Actions	
to any rule	Add Edit Delete Copy Save Separator
to any rule	Add Edit Delete Copy Save Separator
Ping	Toggle Copy Save + Separator
Reboot	
Routes	
S.M.A.R.T. Status	
Sockets	
States	
States Summary	
System Activity	
Tables	
Test Port	
Traceroute	

27. Faites "Submit" pour confirmer le redémarrage

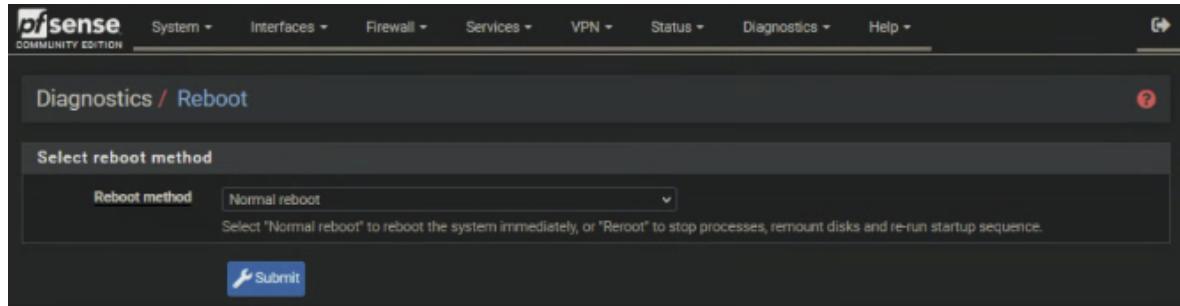


Configuration Applications

Il nous faut un packet qui puisse gérer la sécurisation du réseau, nous utilisons ici Suricata


Afin de pouvoir intervenir en CLI sur le PfSense à distance, il nous faut un accès SSH

Suricata


1. Allez dans "System" > "Package Manager"

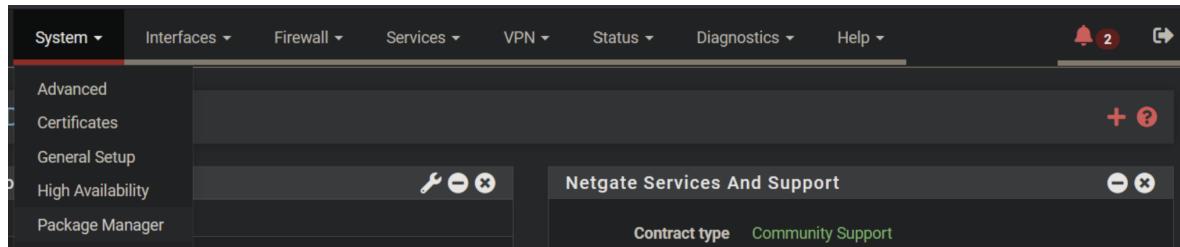

2. Allez dans "Available Packages"

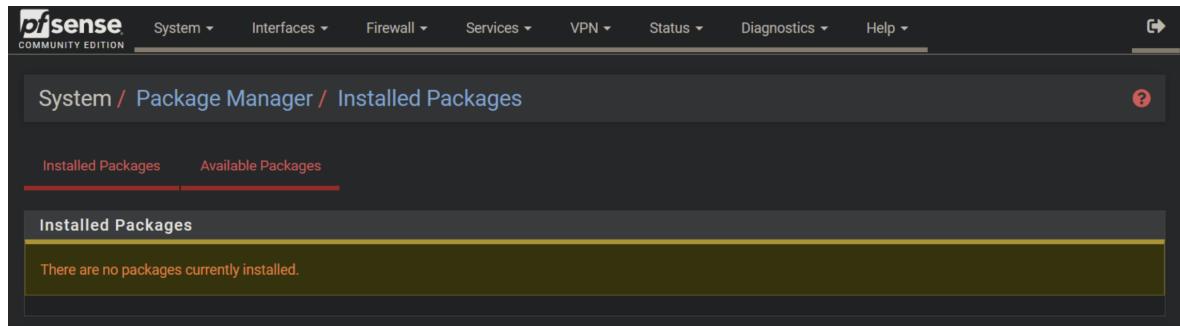

3. Cherchez "Suricata" puis faites "Install"

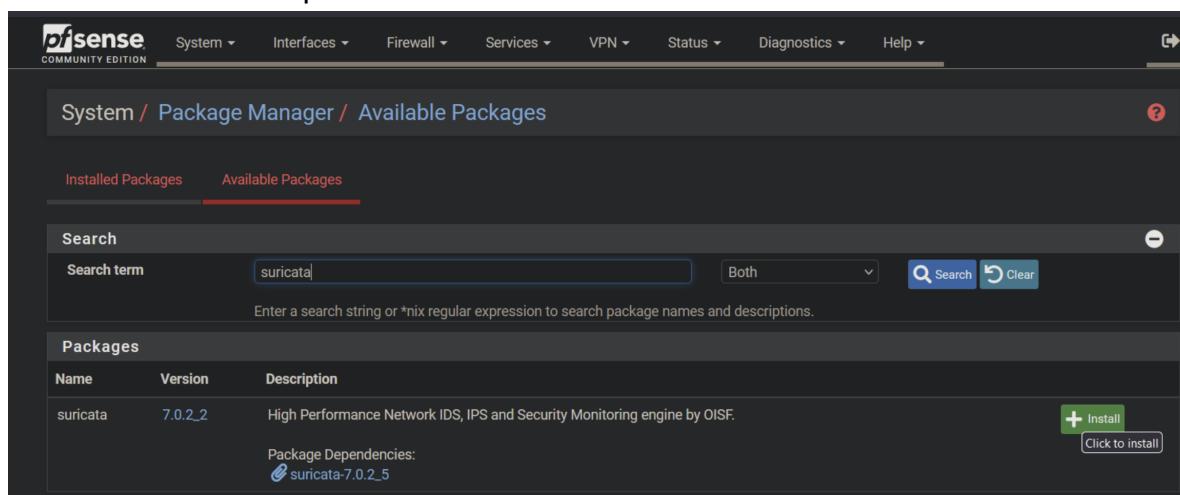

4. Faites "Confirm" pour lancer l'installation et attendez la fin de celle-ci

The image consists of two vertically stacked screenshots of the pfSense Package Manager interface.

Screenshot 1: Shows a confirmation dialog box with the message "Confirmation Required to install package pfSense-pkg-suricata." and a "Confirm" button with a checkmark icon.

Screenshot 2: Shows a success message "pfSense-pkg-suricata installation successfully completed." followed by a detailed log of the package installation process, including URLs for rules and BPF information, and a command-line log of sysctl settings.

5. Allez dans "Services" > "Suricata"

The screenshot shows the pfSense Package Manager interface. At the top, there are tabs for System, Interfaces, Firewall, Services (which is currently selected), VPN, and Status. Below the tabs, the breadcrumb navigation shows System / Package Manager / Package Installation. A green message box displays "pfSense-pkg-suricata installation successfully completed." Below this, there are three tabs: Installed Packages, Available Packages, and Package Installation (which is highlighted). The Available Packages tab shows a list of packages including Auto Config Backup, Captive Portal, DHCP Relay, DHCP Server, DHCPv6 Relay, DHCPv6 Server, DNS Forwarder, DNS Resolver, Dynamic DNS, IGMP Proxy, NTP, PPPoE Server, Router Advertisement, SNMP, Suricata (which is highlighted in red), UPnP & NAT-PMP, and Wake-on-LAN. The Package Installation section contains instructions about Suricata rules, links to documentation, and a command to enable BPF zero-copy mode.

6. Allez dans "Global Settings"

The screenshot shows the pfSense Services / Suricata Global Settings page. The top navigation bar includes System, Interfaces, Firewall, Services (selected), VPN, Status, Diagnostics, and Help. The main content area has tabs for Interfaces, Global Settings (selected), Updates, Alerts, Blocks, Files, Pass Lists, Suppress, Logs View, Logs Mgmt, and SID Mgmt. Under the Global Settings tab, there are sub-tabs for Sync and IP Lists. The Interface Settings Overview table lists various interfaces with their Suricata status, pattern match, blocking mode, description, and actions. A green "+ Add" button is visible at the bottom right of the table.

7. Activez l'option "ETOpen" puis faites "Save" en bas de la page

The screenshot shows the pfSense Services / Suricata / Global Settings / Rules Download page. It prompts the user to choose the type of rules to download, specifically ETOpen Emerging Threats rules. There are two checkboxes: "ETOpen is a free open source set of Suricata rules whose coverage is more limited than ETPro." (checked) and "Use a custom URL for ETOpen downloads". A note below states: "Enabling the custom URL option will force the use of a custom user-supplied URL when downloading ETOpen rules."

8. Allez ensuite dans "Updates" puis faites "Update"

The screenshot shows the pfSense Services / Suricata / Global Settings / Updates page. The top navigation bar includes System, Interfaces, Firewall, Services (selected), VPN, Status, Diagnostics, and Help. The main content area has tabs for Interfaces, Global Settings, Updates (selected), Alerts, Blocks, Files, Pass Lists, Suppress, Logs View, Logs Mgmt, and SID Mgmt. Under the Updates tab, there are sub-tabs for Sync and IP Lists.

INSTALLED RULE SET MD5 SIGNATURES

Rule Set Name/Publisher	MD5 Signature Hash	MD5 Signature Date
Emerging Threats Open Rules	Not Downloaded	Not Downloaded
Snort Subscriber Rules	Not Enabled	Not Enabled
Snort GPLv2 Community Rules	Not Enabled	Not Enabled
Feodo Tracker Botnet C2 IP Rules	Not Enabled	Not Enabled
ABUSE.ch SSL Blacklist Rules	Not Enabled	Not Enabled

UPDATE YOUR RULE SET

Last Update: Unknown
Result: Unknown

Update Force

9. Une fois la pop-up fermée automatiquement, allez dans "Pass Lists"

INSTALLED RULE SET MD5 SIGNATURES

10. Faites "Add"

Configured Pass Lists

List Name	Assigned	Description	Actions
			<input type="button"/> + Add

11. Ajoutez les deux réseaux, 192.168.100.0/24 et 192.168.200.0/24 et faites "Save"

General Information

Name	passlist_43003
The list name may only consist of the characters 'a-z, A-Z, 0-9 and _'.	
Description	You may enter a description here for your reference.

Auto-Generated IP Addresses

Local Networks	<input checked="" type="checkbox"/> Add firewall Locally-Attached Networks to the list (excluding WAN). Default is Checked.
WAN Gateways	<input checked="" type="checkbox"/> Add WAN Gateways to the list. Default is Checked.
WAN DNS Servers	<input checked="" type="checkbox"/> Add WAN DNS servers to the list. Default is Checked.
Virtual IP Networks	<input checked="" type="checkbox"/> Add Virtual IP Networks to the list. Default is Checked.
VPN Addresses	<input checked="" type="checkbox"/> Add VPN Addresses to the list. Default is Checked.

Custom IP Addresses and Configured Firewall Aliases

Hint	Enter as many IP addresses or alias names as desired. Enter ONLY an IP address, IP subnet or alias name! Do NOT enter a FQDN (fully qualified domain name) directly! To use a FQDN, first create the necessary firewall alias, and then provide the alias name here. FQDN aliases are periodically re-resolved and updated by the firewall. You can also provide an IP subnet with a proper netmask of the form network/mask such as 1.2.3.0/24.
IP or Alias	192.168.100.0/24 Delete
	192.168.200.0/24 Delete

Save + Add IP

12. Allez dans "Interfaces"

pfSense COMMUNITY EDITION

Services / Suricata / Pass List / Edit

Interfaces Global Settings Updates Alerts Blocks Files Pass Lists Suppress Logs View Logs Mgmt SID Mgmt

Sync IP Lists

General Information

Name	passlist_43003
------	----------------

13. Enfin, faites "Add" puis allez en bas de la page et faites "Save"

pfSense COMMUNITY EDITION

Services / Suricata

Interfaces Global Settings Updates Alerts Blocks Files Pass Lists Suppress Logs View Logs Mgmt SID Mgmt

Sync IP Lists

Interface Settings Overview

Interface	Suricata Status	Pattern Match	Blocking Mode	Description	Actions
					+ Add

SSH

1. Connectez vous sur le PfSense physiquement
2. Tapez "14"

```

SSHD is currently disabled. Would you like to enable? [y/n]? y
Writing configuration... done.

Enabling SSHD...
Reloading firewall rules. done.

VMware Virtual Machine - Netgate Device ID: 4010f35d3c753035d649

*** Welcome to pfSense 2.7.1-RELEASE (amd64) on pfSense ***


WAN (wan)      -> em0          -> v4/DHCP4: 192.168.202.169/24
LAN (lan)      -> em1          -> v4: 192.168.1.1/24

0) Logout (SSH only)          9) pfTop
1) Assign Interfaces          10) Filter Logs
2) Set interface(s) IP address 11) Restart webConfigurator
3) Reset webConfigurator password 12) PHP shell + pfSense tools
4) Reset to factory defaults 13) Update from console
5) Reboot system              14) Enable Secure Shell (sshd)
6) Halt system                15) Restore recent configuration
7) Ping host                  16) Restart PHP-FPM

Enter an option: ■

```

3. Il est désormais possible de se connecter en SSH par l'adresse 192.168.100.254 avec les identifiants du PfSense, acceptez la clé SSH pour vous connecter

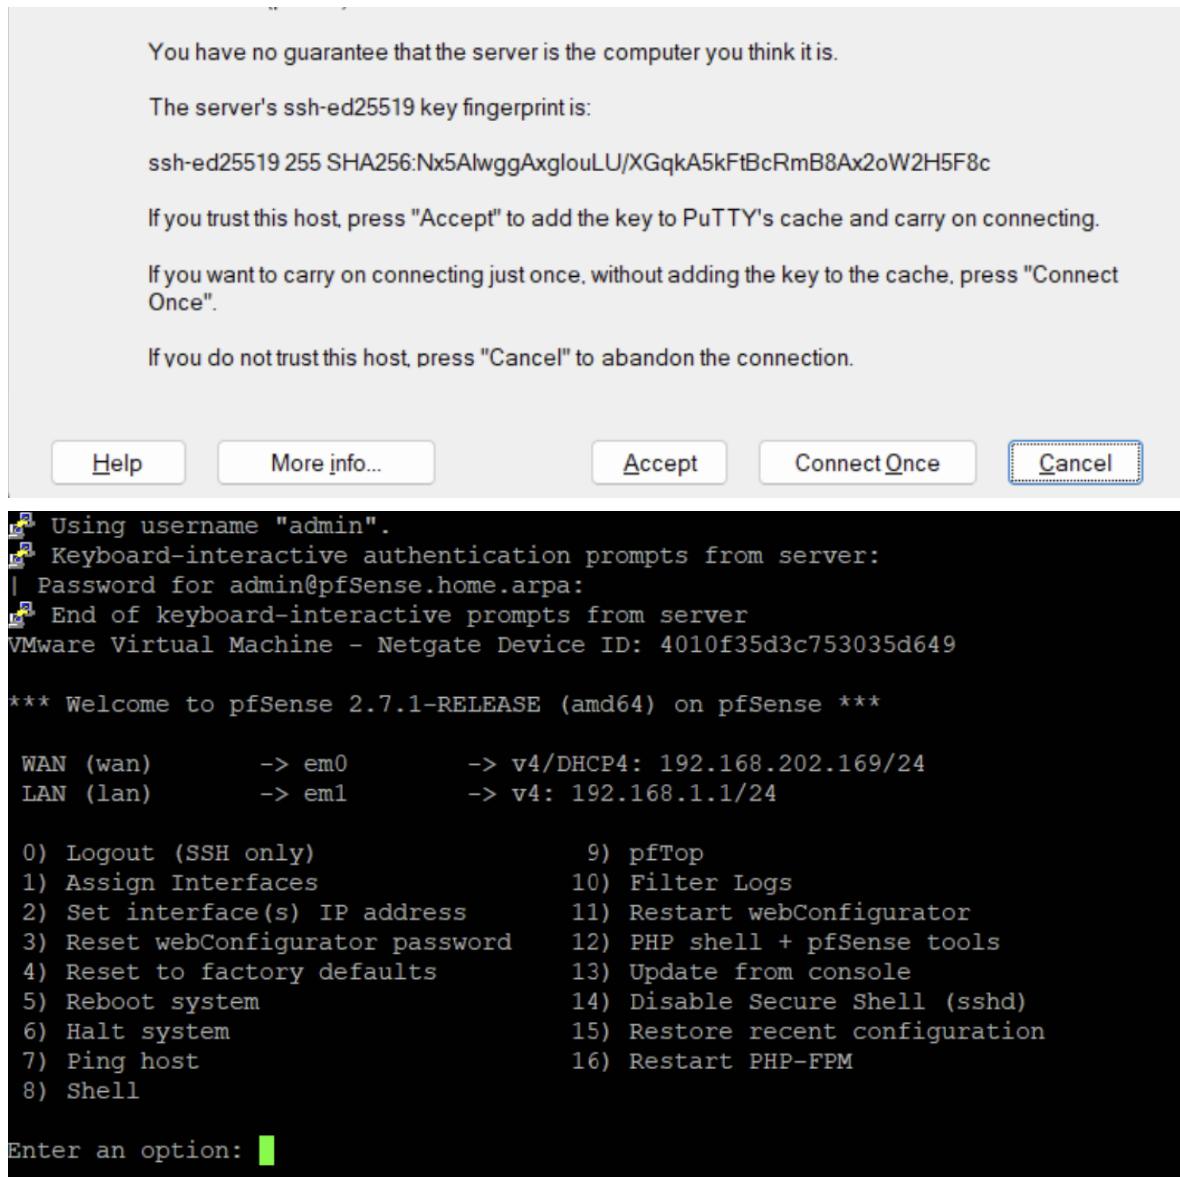

Configuration ACL

*

ACL Vlan 100

*

ACL Vlan 200

*

ACL WAN

*