


OUTPUTS
HFAC: ~26.25Vrms @ 100kHz, 4.57Arms max
ADC_OUT and FPGA logic referenced to COLD_GND
12V_SAFE: 1.67A




Author: Robert Schaab


Sheet: /
File: matrix-subsystem-V2.kicad_sch


Title: Matrix Subsystem


Size: A3 | Date: 2026-08-16 | **Rev: vAug 2026**
KiCad E.D.A. 9.0.7 | Id: 1/4




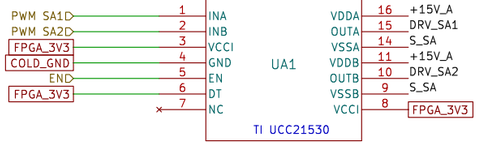





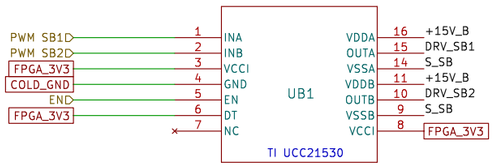


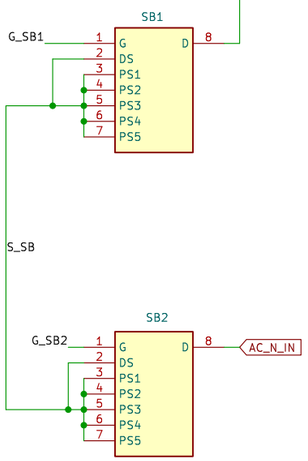


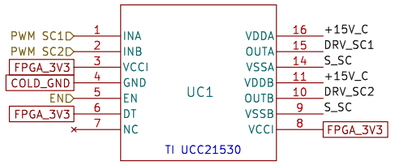



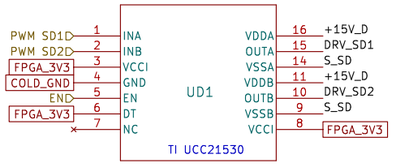

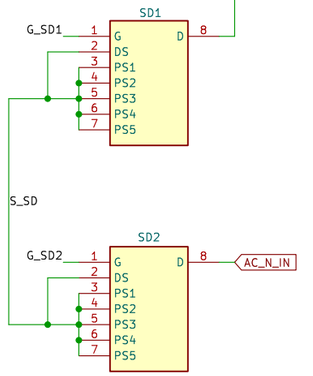





VCCI/GND Decoupling



Gate – Source and Driver Output – Gate Resistors

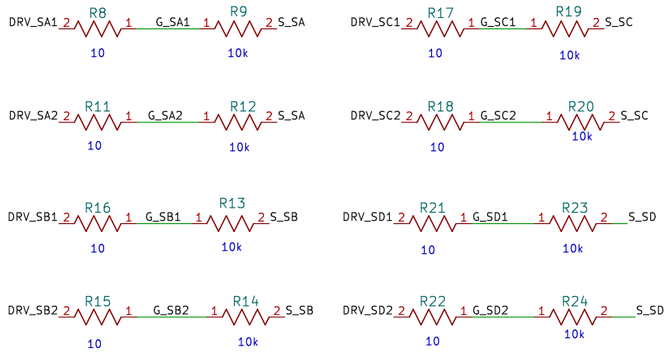


VDD and VSS Decoupling

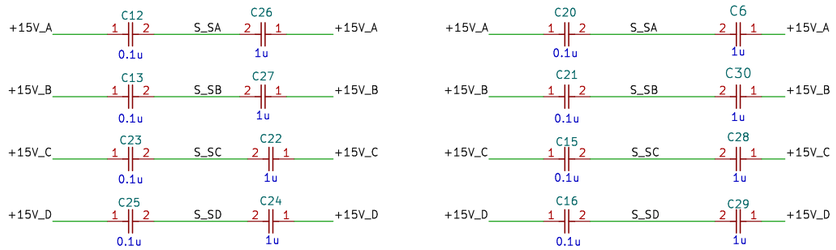

Sheet: /Matrix Converter/
File: matrix-converter.kicad_sch

Title:


Size: A3 | Date: | **Rev:**
KiCad E.D.A. 9.0.7 | Id: 2/4

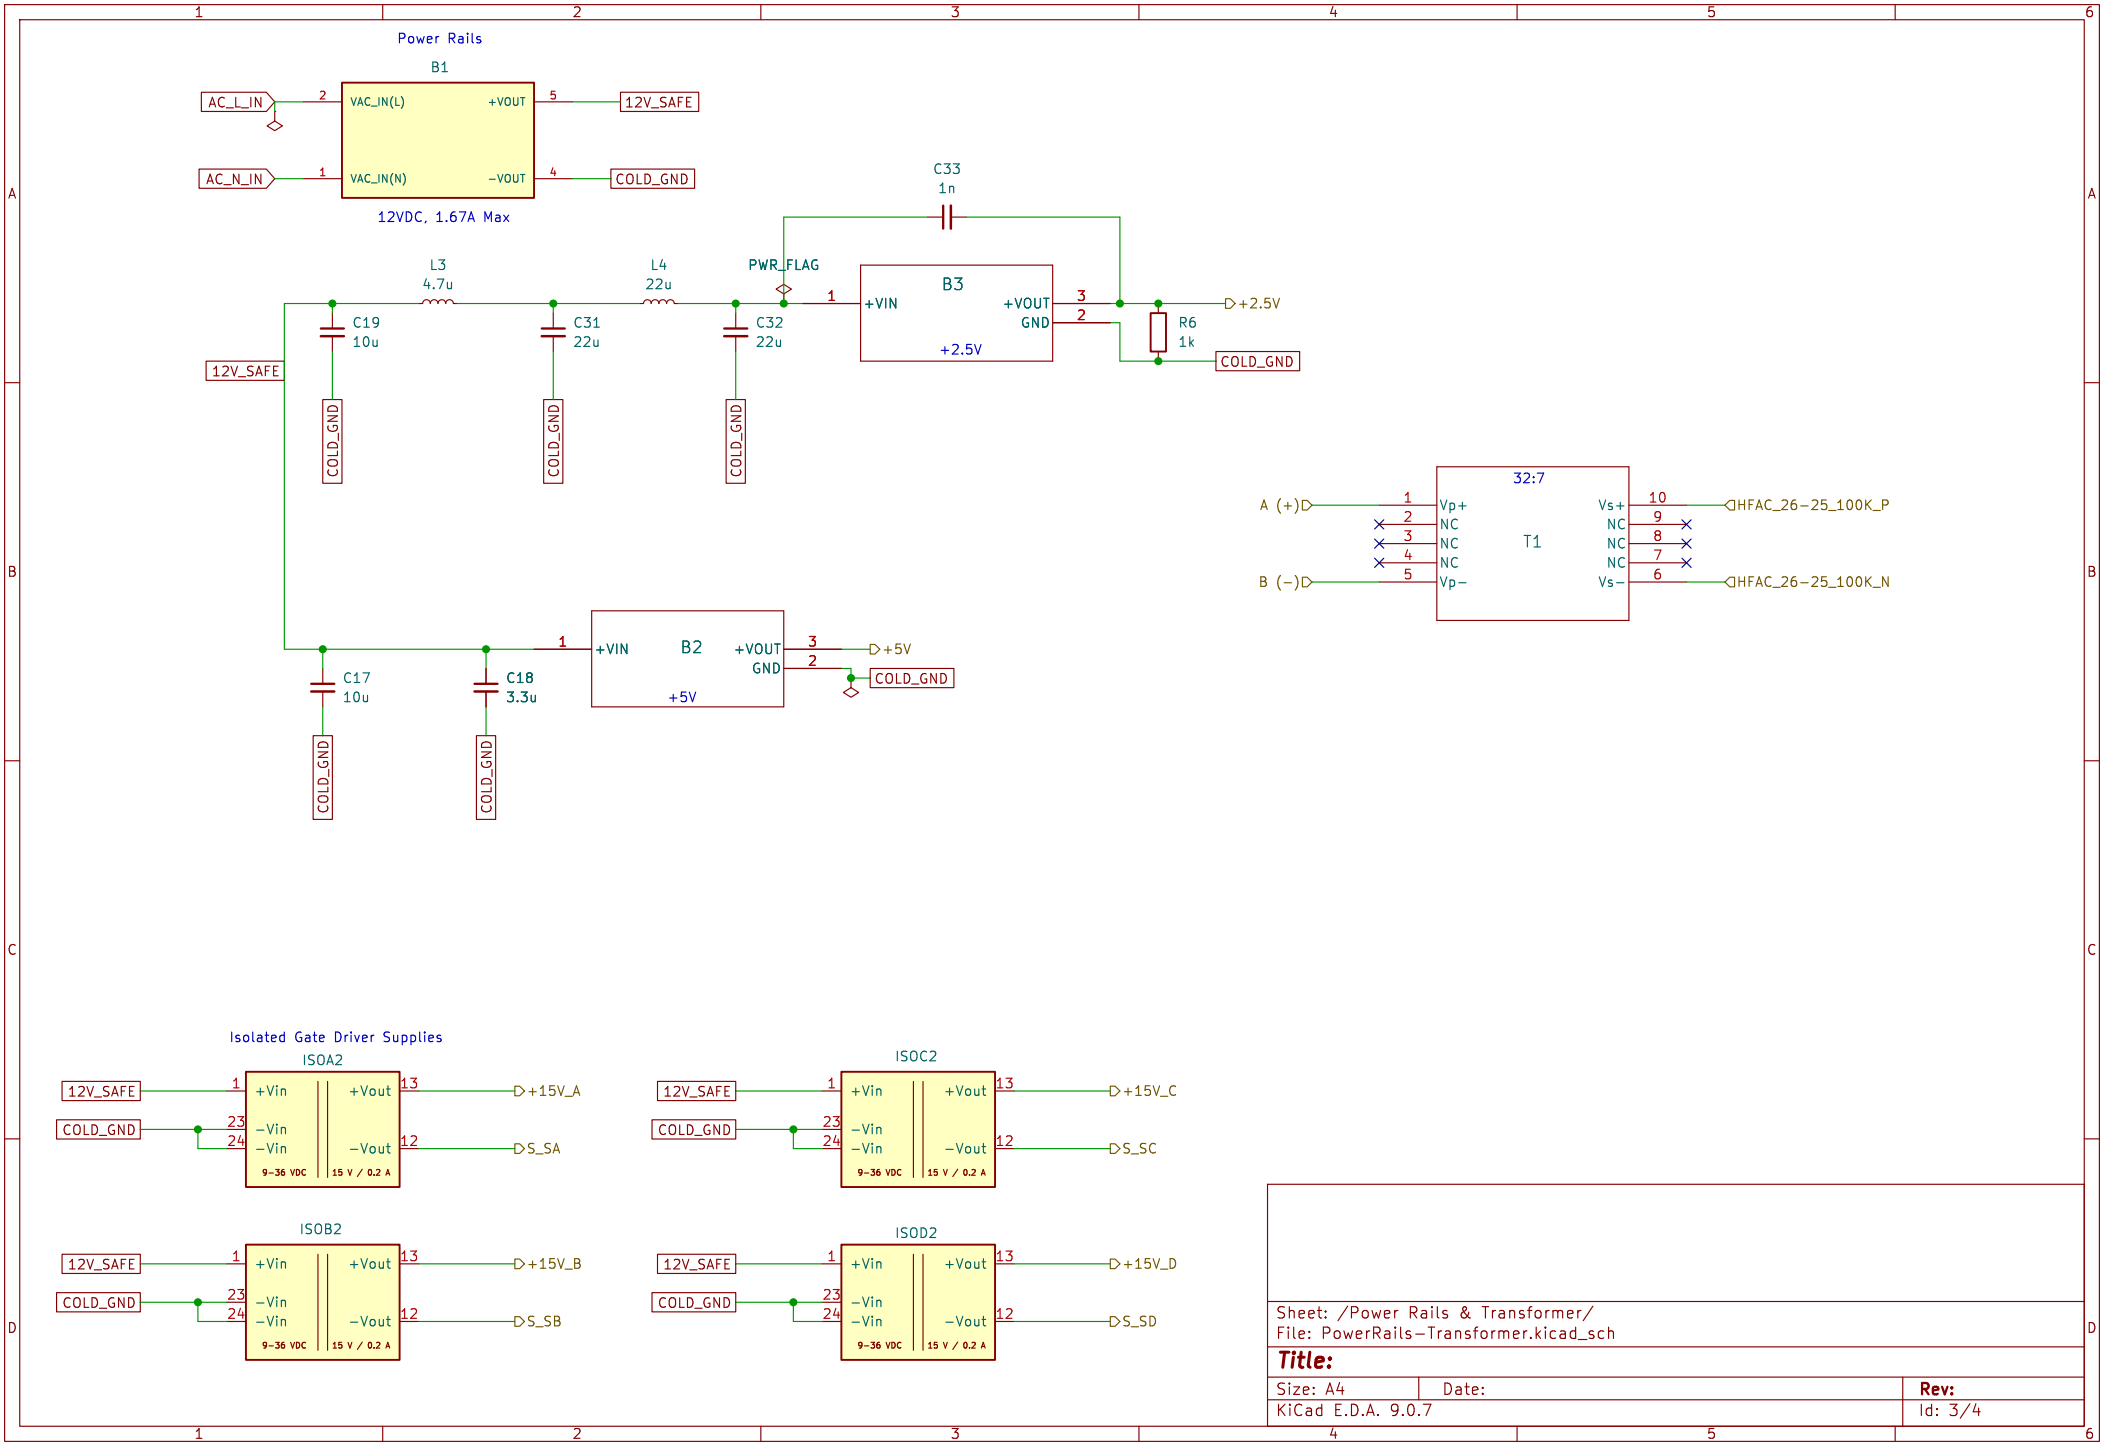

Sheet: /Power Rails & Transformer/
File: PowerRails−Transformer.kicad_sch

Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. 9.0.7		Id: 3/4

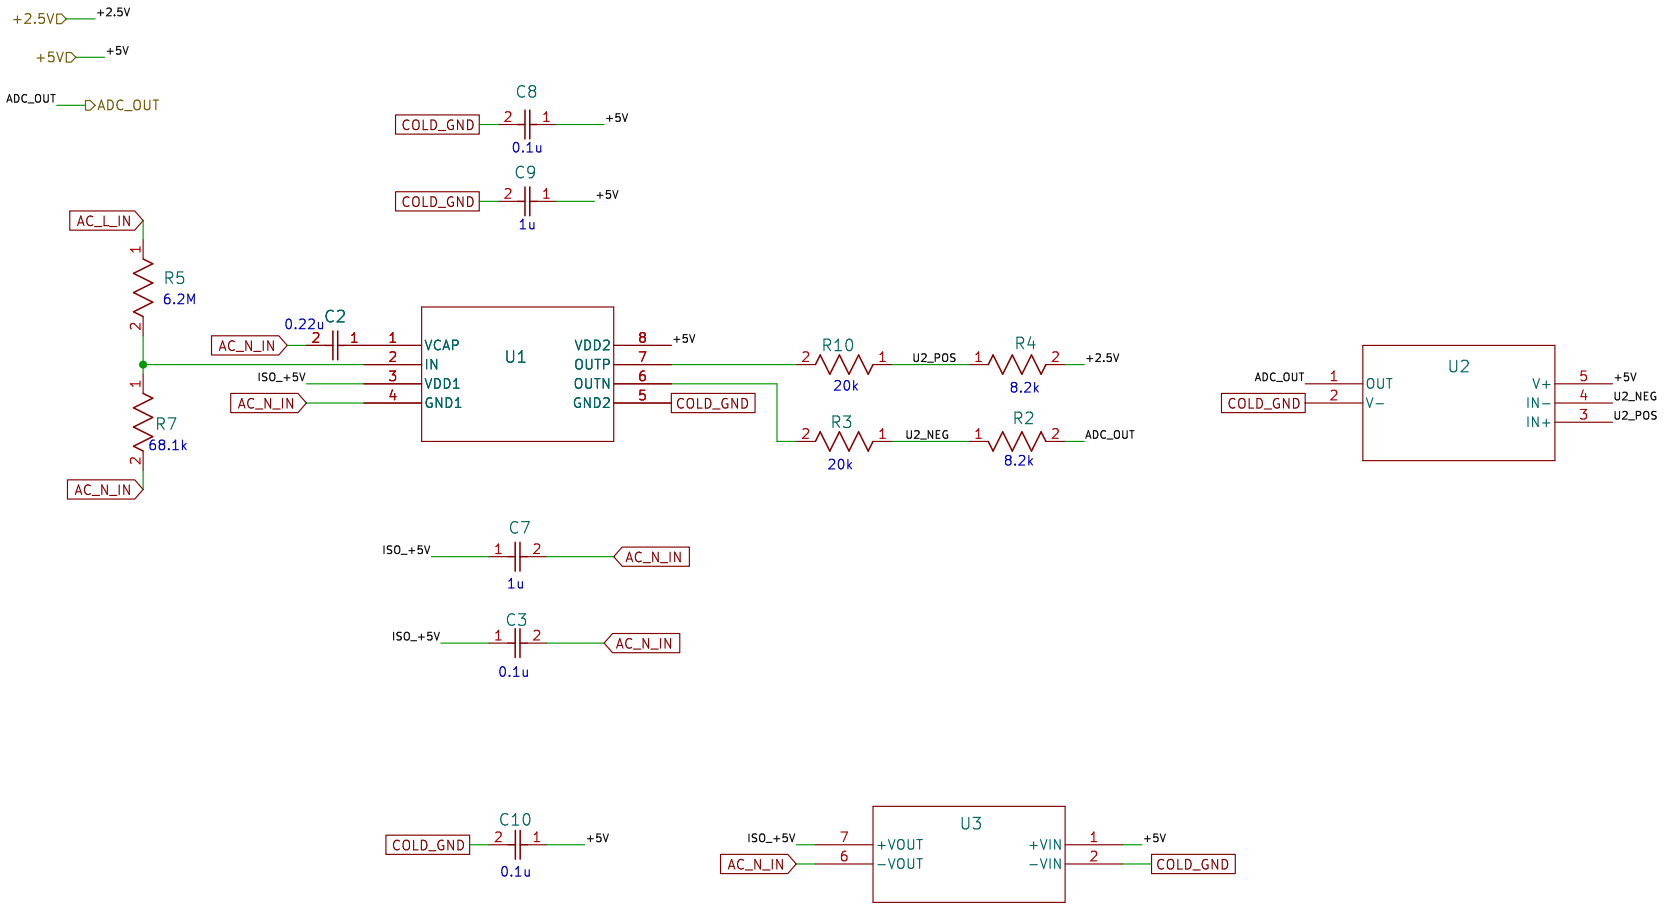

Sheet: /Variable Input/		
File: variable-input.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 9.0.7		Id: 4/4