

MACHINERY CATALOGUE 2026



WWW.AGRO-WELD.PL

ABOUT US



Agro-Weld is a Polish manufacturer of agricultural machinery designed for cleaning, washing and packaging vegetables. Thanks to our proprietary designs, we can offer our customers top-quality machines. Continuous development of our in-house solutions implemented in our products ensures high throughput, ergonomics and safe operation.



Each Agro-Weld machine is developed by qualified designers with extensive experience in the agricultural industry. This translates into numerous practical features that distinguish our machines on both the Polish and international markets.

Customer satisfaction has always been our top priority, which is why we can modify each machine to best meet our customers' expectations and requirements.



Agro-Weld Arkadiusz Cegłowski
Prądyńskiego 16, Środa Wielkopolska, Poland
www.agro-weld.pl
biuro@agro-weld.pl
+ 48 725 140 257 | +48 608 230 369


PALLET BOX TIPPER

3



The pallet box tipper is designed for unloading produce from pallet boxes into bins, hoppers or other receiving equipment. Thanks to its dedicated design, pallet boxes can be loaded using various handling tools, including a manual pallet truck. The robust frame provides a lifting capacity of up to 2 tonnes and allows quick adjustment to the height of the pallet boxes in use.

An optional discharge flap allows the outlet opening to be adjusted, making it possible to control the unloading rate. The unit operates on two heavy-duty double-acting hydraulic cylinders rated up to 180 bar. A built-in safety system ensures that in the event of power loss the tipper stops and holds its position, preventing uncontrolled movement and eliminating the hazard.



Double-acting hydraulic cylinders

The tipper is equipped with double-acting hydraulic cylinders rated at 180 bar.

Safety system

The safety system installed in every tipper locks the machine position in the event of a power failure.

Easy loading

Thanks to the low base, loading is possible using various handling tools, including a manual pallet truck.



	WS-1420	WS-1620	WS-1820
Pallet box width	140 cm	160 cm	180 cm
Load capacity	up to 2 t	up to 2 t	up to 2 t
Cylinder pressure	2x 180 bar	2x 180 bar	2x 180 bar
Control	Switches on control box		
Safety	Load-holding valves preventing uncontrolled lowering of the lifting system		
Loading	Forklift / manual pallet truck		
Power consumption	2,2 kW	2,2 kW	2,2 kW
Electrical connection	3-phase 400 V 5 m cable 32 A 5-pin plug. Note (smooth speed control via 230 V frequency inverter: 230 V up to 2.2 kW)		
Optional extra	Discharge opening control flap		
Electrical connection	3-phase 400 V 5 m cable 32 A 5-pin plug.		

Bin unloading

Receiving & buffering

Cleaning

Sorting

Selection

Weighting & counting

Packaging

Conveyors

Weeding

Production lines

4

RECEIVING HOPPERS

Agro-Weld receiving hoppers are universal and efficient solutions for transporting agricultural produce along a processing line. With capacities from 1 m³ to 5 m³ and adjustable loading and discharge options, they can be tailored to the needs of different farms. Hoppers with capacities from 1 m³ to 2 m³ can be equipped with a configuration that allows produce to be fed in from three sides, increasing their versatility. The 2 m³ model features a steep drop angle, making it ideal for receiving vegetables such as parsley. Hoppers use rubber or PVC conveyor belts and allow the connection of a grader (sizer) or a soil-and-stone separator, ensuring highly efficient separation and transport. The compact design makes installation and integration with other equipment easy, while an optional stainless-steel version increases durability in demanding working conditions.



See how
this machine
works!



Loading height

Loading height adapted to agricultural trailers with rear tipping.

Separation into 3 fractions

- I – soil and other fine contaminants
- II – smaller-size product
- III – full-grade, marketable product of larger size

Feed rate control


The shape of the rubber belt cleats and the adjustable feed speed enable continuous, properly controlled product delivery depending on demand.

Compact design

The hopper features a compact design, which facilitates transport and installation in various conditions, as well as integration with other systems.

Suspended mounting option

The soil & stone separator can be installed in a suspended configuration, improving separation efficiency.

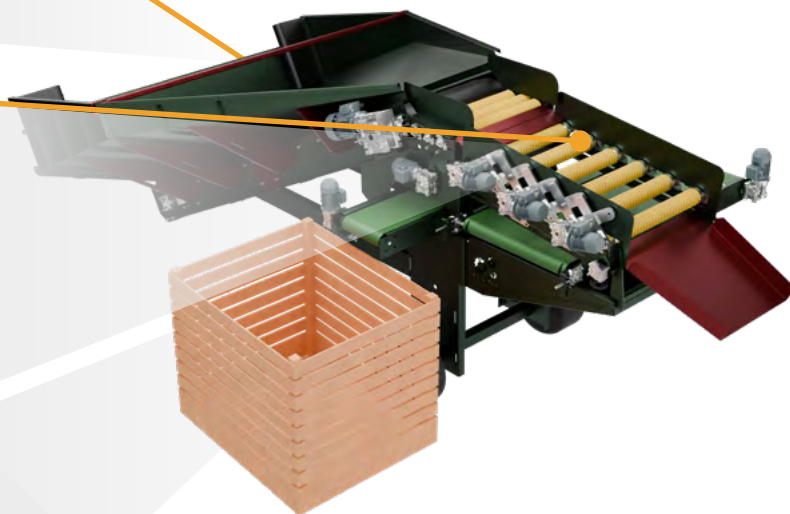

	KP1000	KP1500	KP2000
Capacity	1 m3	1,5 m3	2 m3
Belt width	50 cm	50 cm	50 cm
Belt length	200 cm	260 cm	260 cm
Loading width	140 cm	190 cm	190 cm
Discharge height	102-143 cm	122-160 cm	122-160 cm
Belt material	PVC	PVC	PVC
Electrical connection	3×400 V 5 m cable 32A 5P plug For variable speed control via inverter: 230 V		
Power consumption	0,55 kW	0,55 kW	0,55 kW
Standard equipment	Belt load relief canopy		
Optional extras	Inverter control box; suspended separator; stainless-steel version; longer belt than standard (on customer request)		
Preview			

	KP3000	KPS3000G	KP5000G
Capacity	3 m3	3 m3	5 m3
Belt width	60 cm	80 cm	110 cm
Belt length	300 cm	360 cm	410 cm
Loading width	270 cm	266 cm	299 cm
Discharge height	127-170 cm	144-182 cm	220 cm
Number of separator rollers	-	3	-
Belt material	PCV	Guma typu Chevron	Guma typu Chevron
Electrical connection	3x400V przewód 5 metrów wtyczka 32A 5P W przypadku płynnej regulacji obrotów za pomocą falownika 230V do mocy 2,2KW		
Power consumption	0,75 kW	2,0 kW	2,2 kW
Standard equipment	Belt load relief canopy; inverter control box	Detachable transport hitch; foldable sides; inverter control box	Detachable transport hitch; inverter control box
Optional extras	Suspended separator; stainless-steel version	Cross conveyor; stainless-steel version	Suspended grader; cross conveyor; extension for dump semi-trailer; stainless-steel version
Preview			

Bin unloading

Receiving & buffering

Cleaning

Sorting

Selection

Weighing & counting

Packaging

Conveyors

Weeding

Production lines

6

BUFFER HOPPER

Agro-Weld buffer hoppers are available in a wide range of sizes and capacities, tailored to individual customer requirements. The capacity can be adjusted not only by changing the width and length of the hopper funnel, but also by adding dedicated extension frames, allowing the line to be expanded as production volumes grow.

Inside the hopper there are special deflector baffles which prevent excessive loading of the belt conveyor. Their height can be adjusted using an external lever. The leg design allows the hopper to be permanently fixed to the floor using anchor bolts. The discharge outlet can additionally be equipped with a cascade chute, preventing product bruising and impact damage during unloading.




Agro-Weld

See how
this machine
works!



Expandable design

The hopper capacity can be increased by adding an extension frame, which raises the overall height of the unit.



Reduced belt load

A dedicated internal deflector baffle reduces the pressure of the product on the belt conveyor, preventing belt jamming.

Floor anchoring option

The hopper legs are designed for anchoring to the production hall floor, securing the structure against tipping over.



AVAILABLE CONFIGURATIONS

Available widths	1,5 - 3 m	Available lengths	1,5 - 4 m
Capacity	1,5 - 24 m ³	Belt	PVC belt, 50 cm wide
Installation	Free-standing or floor-mounted installation		
Electrical connection	3×400 V 5 m cable 32 A 5-pin plug; for variable speed control: 230 V frequency inverter up to 2.2 kW		
Standard equipment	Load-reducing deflector baffle		
Optional extras	Variable speed control via frequency inverter; stainless-steel version; cascade chute at the belt conveyor; extension frames to increase capacity		



Agro-Weld

The separators enable pre-cleaning of produce, removing soil and small stones. Their use makes it possible to eliminate the largest contaminants before vegetables are fed into, for example, a brush washer/brush cleaner. The separator's design allows a crate/bin or a waste conveyor to be positioned underneath, which helps keep the production line clean and organised. Thanks to the use of star-profile rollers, the machine also performs well in removing leaf tops/haulm from carrots and parsley. The separator can be installed at the discharge outlet of an infeed hopper or positioned as a standalone machine before a brush cleaner or another unit, depending on the line layout.



Suspension Installation Option

The separator can be suspended at the discharge of an infeed hopper or a belt conveyor.



Star-Profile Rollers

Star-profile rollers make it possible not only to remove excess soil from vegetables, but also to pre-clean them by removing unnecessary parts such as leaf tops, or sprouts in the case of potatoes.

Space for a Waste Crate

The separator's dimensions allow a crate/bin to be placed underneath, so that waste from the cleaning process can fall directly into it.

Standard Models: 660–860.

Machine capacity depends on its working width. The number of star-profile rollers is selected based on the required cleaning intensity and the type of soil and contaminants. In addition to the standard configuration, the separator can be configured with up to 20 star-profile rollers. The working width is selected according to the required throughput.

	SE-560	SE-880	SE-1080
Working width	60 cm	88 cm	108 cm
Throughput	up to 6 t/h	up to 8 t/h	up to 10 t/h
Roller type	Star-profile rollers		
Height adjustment	Adjustable to match the infeed hopper inclination		
Electrical connection	3×400 V 5 m cable 32 A 5P plug Variable speed control (VFD): 230 V up to 2.2 kW		
Modification options	Stationary version, adjustable separator tilt angle		
Standard equipment	Hold-down cover (tarpaulin)		
Optional extra	Stepless speed control via frequency inverter (VFD)		

8

BRUSH CLEANER



Agro-Weld brush cleaners are equipped with straight or wavy brushes, allowing them to be adapted for cleaning both round and elongated vegetables. The design is based on two fixed wheels and two swivel wheels with brakes, and it enables height adjustment—by 20 cm on the feed (inlet) side and by 50 cm on the discharge (outlet) side. The cleaners are fitted with pressure tarpaulins, which improve cleaning performance and protect against dust generated during the cleaning process. A version with brush pressure is also available. The number (working length) and hardness of the brushes are selected depending on the required cleaning intensity, soil type, and level of contamination. Standard configurations include 10 up to 20 brushes, and other configurations are available on request. The cleaners can also be equipped with a separation function by replacing the first rows of brushes with separator stars. Available in widths of 56, 81, and 111 cm.

Mechanical pressure

The pressure flap improves cleaning results and reduces dust lift.

Brush shape

Thanks to various brush shapes available, the machine can be adapted to work with different types of vegetables.

Adjustable height

The machine's discharge height is adjustable by up to 50 cm. The feed height can also be adjusted by 20 cm.



	CS1056	CS1480	CS20110
Width	56 cm	81 cm	111 cm
Length	180 cm	230 cm	310 cm
Throughput*	up to 6 t/h	up to 8 t/h	up to 10 t/h
Roller type	Proste lub falowane		
Height adjustment	Infeed: 20 cm discharge: 50 cm		
Power consumption	0,55 kW	0,75 kW	2,2 kW
Electrical connection	3×400 V 5 m cable 32 A 5-pin plug. For variable speed control: 230 V frequency inverter up to 2.2 kW		
Standard equipment	Hold-down tarpaulin or mechanical hold-down system		
Optional extras	Stainless-steel version; variable speed control via frequency inverter; contamination collection tank; dust extraction unit		

*Throughput depends on the working width. The models listed above are standard configurations; however, the unit can also be supplied in other configurations (e.g., different number of brushes).

GINGER OR HORSERADISH CLEANER

9


A compact module for mechanical cleaning of rhizomes (horseradish, ginger, and similar root crops). A set of specially designed brushes gently removes soil and fibrous residues, evens out the surface, and prepares the product for further washing, sorting, or packing. The drive with smooth speed control allows the operating speed to be adjusted to the processed product.



Agro-Weld

Gentle, effective cleaning

Profiled brushes operate with a constant clearance—without sharp edges—minimising weight loss and micro-damage.

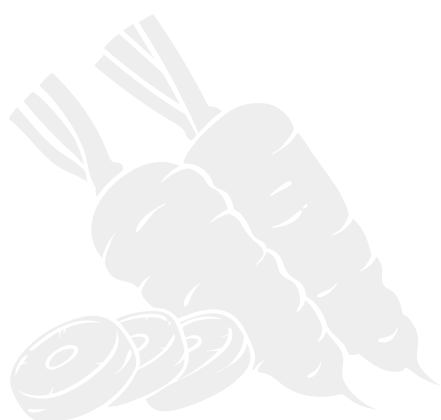

Intensity control

A geared motor with speed control (frequency inverter) enables quick adjustment to the quality and level of contamination of the material.

	CI-00
Width	700 mm
Length	350 mm
Throughput	100 kg/h
Application	Horseradish, ginger, root vegetables
Roller type	Brush
Power consumption	0,25 kW
Electrical connection	230 V
Standard equipment	One brush
Optional extras	Custom brush profile as required; option to expand the machine with additional brushes

Bin unloading

Receiving & buffering

Cleaning

Sorting

Selection

Weighting & counting

Packaging

Conveyors

Weeding

Production lines

10


RINSE WASH TANK



A wash tank with an outfeed conveyor designed for pre-rinsing root and tuber vegetables. The perforated modular belt gently lifts the product out of the water, while stepless speed control allows you to adjust the process intensity to the size grading and condition of the raw material. A mobile frame enables easy repositivoning and quick changeovers. The operator control panel with an emergency STOP ensures simple and safe operation. The belt can be quickly detached for cleaning and maintenance, reducing downtime and supporting high hygiene standards. This solution is particularly used in vegetable peeling lines, where it effectively removes peel residues and contaminants while providing gentle in-water product handling.


Gentle washing & discharge

The perforated belt with flights (cleats) stabilises product transport and drains water already at the outlet. The inclined discharge reduces bruising and shortens drip-off time.

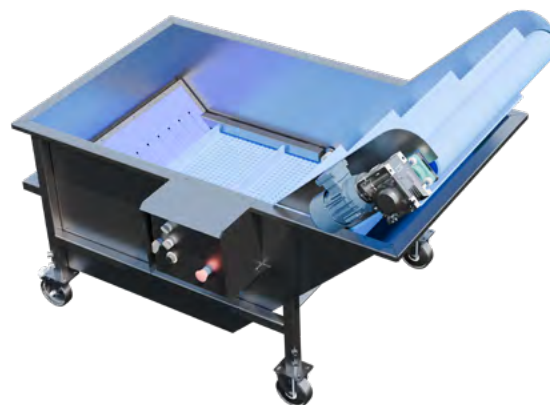

Hygiene & service access

Smooth tank walls and a bottom drain for quick emptying. The tank allows easy belt release and provides good access to rollers for washing and routine inspection.

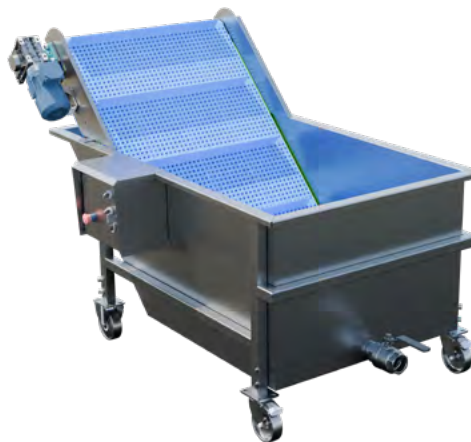

Mobility & adaptability

Frame on four wheels with brakes, with adjustable discharge height/chute position. Easy integration of start/stop signals with other machines on the processing line.

	RA-PP-00	WP-800	WP-900
Belt width	600 mm	800 mm	900 mm
Overall length	1820 mm	1815 mm	2300 mm
Tank capacity	400 l	540 l	890 l
Belt type	Modular, perforated, with cleats	Modular, perforated, with cleats	Modular, perforated, with cleats
Drive power	0,25 kW	0,25 kW	0,25 kW
Standard equipment			
Optional extras	Frequency inverter; Z-type conveyor	Frequency inverter; Z-type conveyor	Frequency inverter; Z-type conveyor

ADJUSTABLE ROLLER GRADER

11



An adjustable roller grader designed for grading/sorting vegetables. It allows the roller gap to be set from 40 to 100 mm for polyurethane rollers with a feather profile, and from 10 to 65 mm for polyurethane spiral rollers. Adjustment is made using a hand crank located at the discharge end, which does not require any dismantling of the machine. The changeover is extremely fast—just a few seconds, compared to other solutions available on the market.



Suspension Installation Option


The grader can be suspended at the discharge of an infeed hopper or a belt conveyor.

Hand-crank adjustment

The roller spacing is adjusted via a crank handle positioned at the outlet. Changing the gap does not require opening or dismantling the machine.

Adjustable discharge outlet

The length and inclination of the discharge chute automatically adapt to the currently selected roller spacing, making operation easier and more efficient.

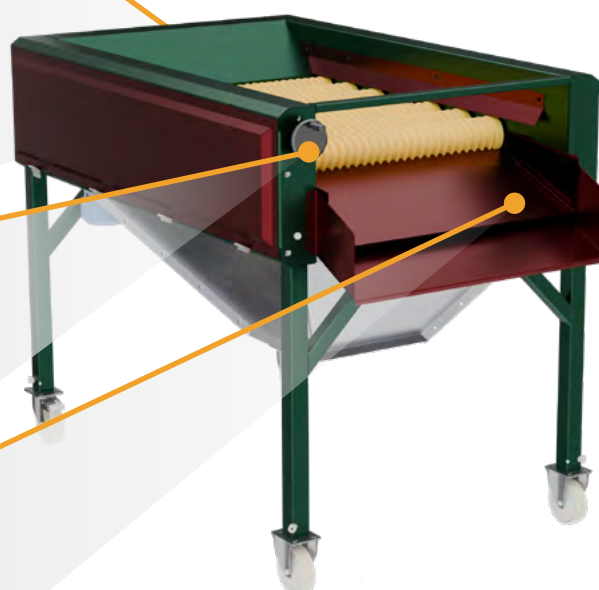

	KA-780	KA-880
Working width	80 cm	80 cm
Overall length	150 cm	167 cm
Number of rollers	7	8
Roller type	Spiral thread rollers or smooth polyurethane rollers with feather profiles	
Adjustable gap range (roller spacing)	25–90 mm or 10–65 mm (spiral thread) 40–100 mm (feather rollers)	
Infeed height	125 cm (+50 cm height adjustment)	
Clearance height	85 cm (+50 cm height adjustment)	
Power consumption	0,75 kW	0,75 kW
Electrical connection	3×400 V 5 m cable 32 A 5P plug Variable speed control (VFD): 230 V up to 2.2 kW	
Standard equipment	Hold-down cover (tarpaulin)	
Optional extra	Motor with frequency inverter (VFD)	

Bin unloading

Receiving & buffering

Cleaning

Sorting

Selection

Weighting & counting

Packaging

Conveyors

Weeding

Production lines

12

SMALL FRUIT SORTER



The small fruit sorter is designed for handling small and delicate fruits, such as blueberries, without the risk of damage. The sorting gap is fixed and can range from 4 to 25 mm, depending on the selected configuration. A side platform for a crate facilitates manual sorting by keeping the crate at the same level as the sorter. The machine design also allows height adjustment, enabling easy integration with the existing processing line.

Gentle handling


The machine provides gentle handling, protecting delicate fruit from damage during sorting.

Side platform

The side platform improves operator comfort by allowing a crate to be positioned at the sorter height.

Adjustable height

The sorter frame enables smooth height adjustment of the base, allowing the machine to be matched to the existing production line.

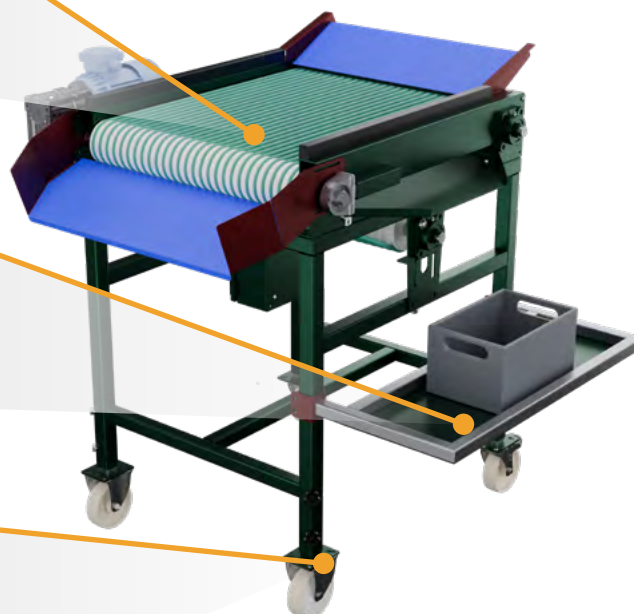

	SOD-6010	SOD-6012	SOD-6014
Width	60 cm	60 cm	60 cm
Length	100 cm	120 cm	140 cm
Infeed height	115 cm + 40 cm upward adjustment		
Discharge height	87 cm		
Power consumption	0,37 kW	0,55 kW	0,75 kW
Electrical connection	3x400 V 5 m cable 32 A 5-pin plug; for variable speed control: 230 V frequency inverter up to 2.2 kW		
Optional extras	Stainless-steel version; food-grade certified rubber; motor with frequency inverter		

DOUBLE-DRUM GRADER FOR SMALL FRUIT

13



See how
this machine
works!



The double-drum grader for small fruit ensures precise and gentle sorting, minimising the risk of product damage. Thanks to its innovative design, the machine is ideally suited for grading delicate small fruit such as blueberries. Equipped with a conveyor featuring a white belt and additional integrated lighting, the grader provides excellent visibility and full control over the sorting process. The design also allows for quick and easy replacement of the grading drums, significantly improving usability and enabling fast adaptation to different fruit types and sizes.

Integrated lighting


Built-in lighting improves the visibility of the graded fruit, increasing accuracy and allowing defects to be identified more quickly.

White conveyor belt

The white sorting belt ensures smooth operation and improves product visibility, making quality control easier during sorting.

Easy drum replacement

The grader enables fast and intuitive drum changeover, allowing the machine to be quickly adapted to different fruit sizes without long downtime.

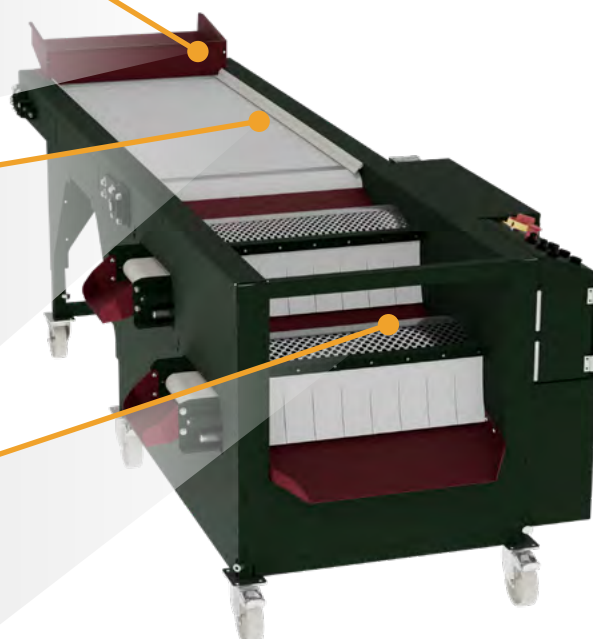

	SO2B-601012
Working width	60 cm
Overall length	300 cm
Grading range	8 - 25 mm
Discharge height	Grade 1: 67 cm Grade 2: 52 cm Grade 3: 41 cm
Power consumption	1 kW
Electrical connection	3×400 V 5 m cable 32 A 5P plug Variable speed control (VFD): 230 V up to 2.2 kW
Standard equipment	Food-grade certified belt, stepless speed control via frequency inverter (VFD), LED lighting
Optional extras	Stainless steel

Bin unloading

Receiving & buffering

Cleaning

Sorting

Selection

Weighting & counting

Packaging

Conveyors


Weeding

Production lines

14 BELT INSPECTION TABLES



Belt sorting tables are designed for manual sorting of vegetables on a processing line. Thanks to a wide range of available sizes and the option to freely configure dividers and discharge chutes, the table can be fully tailored to the customer's requirements. Each unit is equipped with LED lighting and an inverter control box (VFD), allowing the belt speed to be adjusted. With swivel castors fitted with brakes, the table can be easily repositioned to modify the layout of the production line. Depending on operational needs, the tables can be fitted with an extended buffer hopper or with waste and reject pockets featuring a dedicated belt conveyor for by-products and discard material.

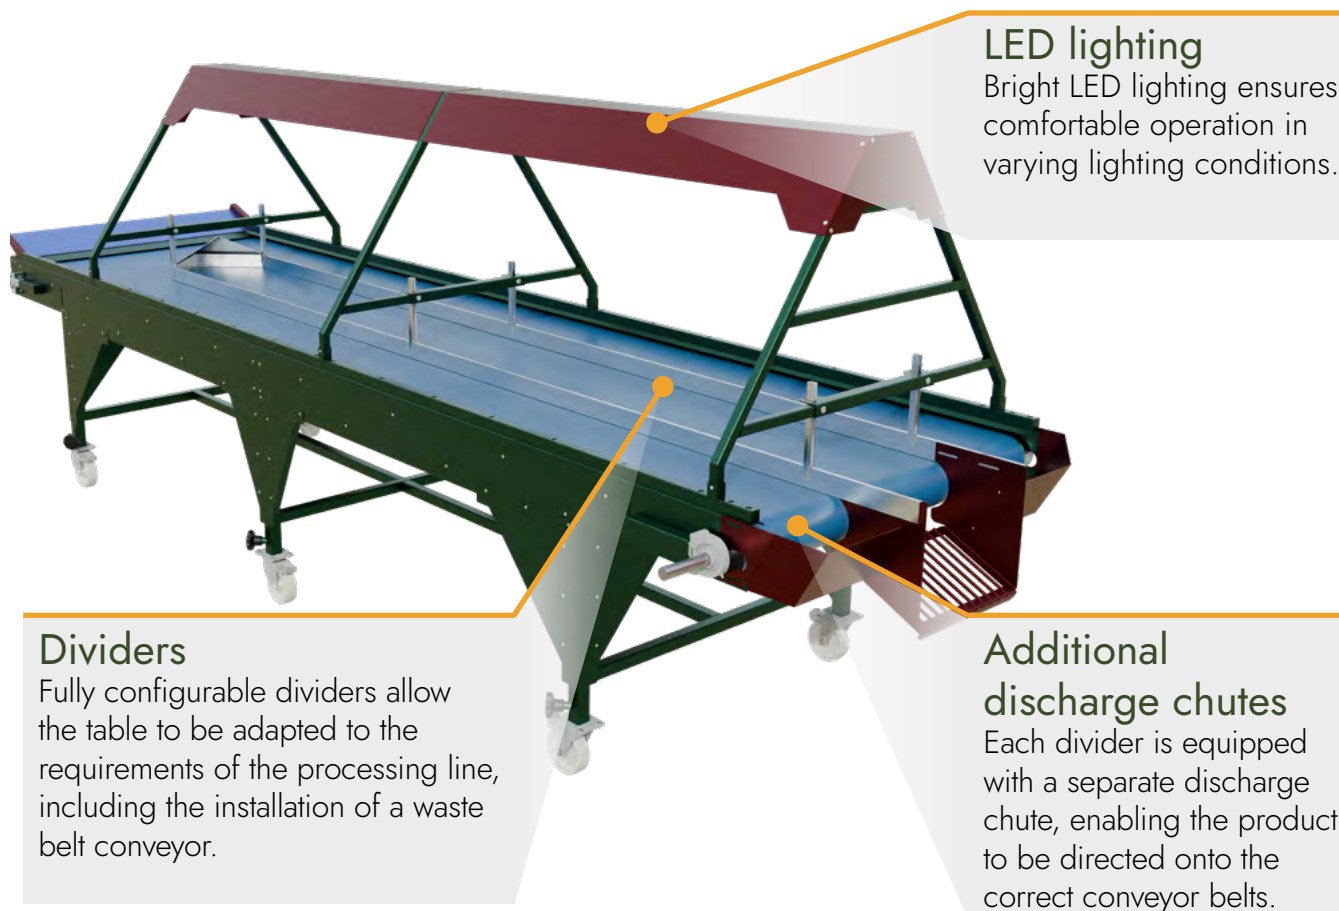

	SST-2008	SST-3510	SST-5012
Width	80 cm	100 cm	120 cm
Overall length	220 cm	370 cm	520 cm
Capacity	4 t/h at 60 Hz	6 t/h at 60 Hz	8 t/h at 60 Hz
Belt	PVC		
Dividers	Fully configurable		
Power consumption	0,37 kW	0,55 kW	0,75 kW
Electrical connection	3×400 V 5 m cable 32 A 5-pin plug; for variable speed control: 230 V frequency inverter up to 2.2 kW		
Standard equipment	LED lighting; variable speed control via frequency inverter		
Optional extras	Stainless-steel version; food-grade certified belt; waste pockets; waste belt conveyor		



ROLLER INSPECTION TABLES 15

Roller inspection tables enable manual sorting of vegetables on the production line. The rollers can be made of acid-resistant aluminium or plastic. Each table is fitted with wheels, allowing easy repositioning and quick reconfiguration of the processing line layout. Operation is supported by LED lighting and a motor controlled via a frequency inverter, enabling smooth speed adjustment. Depending on requirements, the tables can also be equipped with side waste pockets, a single or double divider, and a waste belt conveyor mounted underneath the table.



	SSR-2508	SSR-3010	SSR-4012
Width	80 cm	100 cm	120 cm
Overall length	270 cm	320 cm	420 cm
Throughput	4 t/h at 60 Hz	6 t/h at 60 Hz	8 t/h at 60 Hz
Roller type	PVC, aluminium, acid-resistant		
Dividers	Any configuration		
Power consumption	0,37 kW	0,55 kW	0,75 kW
Electrical connection	3×400 V 5 m cable 32A 5P plug For variable speed control via 230 V inverter up to 2.2 kW		
Standard equipment	LED lighting; smooth speed control via frequency inverter		
Optional extras	Stainless-steel version; waste pockets; waste conveyor belt		

16

FRUIT COUNTER



The fruit counter is a specialised machine designed for accurate piece-counting of larger fruits, such as limes, lemons, apples, and avocados. Thanks to advanced technology, it ensures fast and precise counting, significantly improving packing operations and preparation for distribution. The machine is available in single-lane or dual-lane versions, allowing it to be adapted to the required capacity and production scale.

Single- and dual-lane options

The fruit counter is also available in a higher-capacity dual-lane version. This configuration enables two separate fruit streams to be counted simultaneously, speeding up the process.

Accurate piece-counting for larger fruit

Urządzenie zaprojektowane z myślą o większych owocach, jak cytryny czy awokado, gwarantuje dokładność liczenia na sztuki, co jest istotne przy pakowaniu i sprzedaży detalicznej.

Gentle operation

The counter works quickly yet gently, minimising the risk of damage, which helps maintain the fruit's appearance and shelf presentation.



	LO1.90	LO2.90
Number of channels	1	2
Channel width	90 mm	90 mm
Throughput	up to 200 pcs/min	up to 350 pcs/min
Control	Automatic	
Power consumption	1,5 kW	1,5 kW
Electrical connection	3×400 V 5 m cable 32 A 5P plug	
Optional extra	Stainless steel version	



The checkweigher is a precision device designed for dynamic in-line weighing of moving packages, providing continuous quality control on the production line. The system automatically verifies whether the weight of each pack falls within the specified tolerance limits, which is essential for maintaining product consistency and meeting production standards. If a pack is outside the acceptable weight range, it can be automatically diverted onto a side conveyor, removing non-compliant products from further processing.

Pack rejection

The checkweigher automatically rejects packs with incorrect weight, ensuring accuracy and uninterrupted production without the need for manual inspection.

Fast communication

Instant data transfer to control systems enables immediate response and real-time process adjustments.

Safe and stable weighing

A toothed-belt lifting system provides smooth movement and high weighing accuracy, while minimising vibrations.



WKO			
Maximum pack size	60x70x40 cm	Weighing range	1-30 kg
Throughput	up to 10 packs/min	Power consumption	0,5 kW
Control	7-inch touchscreen; manual (pedal) or automatic		
Electrical connection	3x400 V 5 m cable 32 A 5-pin plug		
Standard equipment	AXIS scale		
Optional extras	Stainless-steel version; adaptation for larger pack sizes and increased throughput; reject system for incorrect-weight packs		

18

WEIGHING & BAGGING MACHINE



See how
this machine
works!



The weighing and bagging machine enables easy portioning and packing vegetables into bags and other types of packaging. The machine operates in automatic mode after time parameters are entered, or in manual mode, where the hopper flap is opened using a foot switch. Control is provided via a 7-inch touchscreen panel, ensuring intuitive operation. The unit allows weighing portions from 1 to 30 kg. Connecting the weighing & bagging machine with a raschel net bagging machine improves workflow continuity and increases the efficiency of the entire packing station. In manual mode, it is possible to empty the hopper to remove excess product.



Feed hopper

At the beginning of the conveyor there is a feed hopper, which prevents the product from spilling during machine loading.

Platform

The bag resting platform makes it easy to use and allows you to use it with one hand.

Manual hopper emptying

The machine can operate in manual mode, where a foot switch can be used to empty the hopper of excess product.



	WW-302	WW-302 Compact	WW-151 Smart
Connection to raschel net bagger	YES	NO	NO
Top-up conveyor belt	YES	YES	NO
Weighing range	1–30 kg		2.5–15 kg
Throughput	up to 6 t/h		up to 4 t/h
Control	7-inch touchscreen; manual (pedal) or automatic		
Pneumatic supply	3/8", min. 4 bar 20 Nl/min		
Power consumption	0,92 kW		0,55 kW
Electrical connection	3×400 V 5 m cable 32A 5P plug For variable speed control via 230 V inverter up to 2.2 kW		
Standard equipment	Side walls and dividers; acid-resistant belt; adjustable chute (neck) height; bag support platform; option to install a cross conveyor belt (raschel net bagger in longitudinal arrangement); levelling feet		
Optional extras	Stainless-steel version		

RASCHEL BAGGING MACHINE 19



See how
this machine
works!



The Agro-Weld Raschel bagging machine is designed for packing bags weighing from 2.5 to 25 kg. The machine is equipped with two vibration motors mounted on the hopper and the belt conveyor, supporting a smooth and even product flow. The construction includes two exhaust ducts for removing fumes generated during bag sealing, as well as transparent doors for monitoring the packing process. The unit can be fitted with single- or double-needle sewing heads from Fischbein, Newlong, or Yao Han. Operation is managed via an intuitive 7-inch touchscreen control panel. Thanks to the use of multiple sensors, the machine offers high reliability and safe operation under all production conditions.

Transparent doors

The transparent enclosure allows continuous monitoring of the packing process taking place inside the machine.

Easy connection

The infeed section enables quick and stable integration with a weighing bagger or a multihead/channel weigher.



User-friendly display

The machine is controlled via a large, intuitive 7-inch touchscreen, ensuring simple and efficient operation.

	RA1	RA2
Sewing head	Single-needle (Fischbein / Newlong / Yao Han)	Double-needle (Fischbein / Newlong / Yao Han)
Throughput	up to 8 t/h	up to 8 t/h
Bag weight range	2.5–25 kg	2.5–25 kg
Conveyor length	310 cm (manual discharge) or 230 cm (palletiser discharge)	
Control system	7-inch touchscreen control panel	
Power consumption	3,5 kW	3,5 kW
Electrical connection	3×400 V 5 m cable 32 A 5P plug	
Standard equipment	Infeed blockage sensor; bottom belt vibration; hopper vibration; side guards; transparent sliding doors; label dispenser (label strip unwinder); automatic sewing head lubrication; printer connection ready	
Optional extras	Weighing unit (scale)	

Bin unloading

Receiving & buffering

Cleaning

Sorting

Selection

Weighing & counting

Packaging

Conveyors

Weeding

Production lines

20 CROSS-FEED BELT CONVEYOR FOR NET BAGGER (RASCHEL)

The conveyor transfers pre-portioned vegetables from the processing line and feeds them laterally into the infeed hopper of the net bagger (raschel), ensuring a constant and gentle product flow. The cleated belt stabilises transport, while the mobile frame with braked castors enables easy positioning and quick connection at the packing station. The design is intended for use in the packing area – easy to wash down and with convenient service access. Using this conveyor allows the net bagger and weigh-bagger to be positioned parallel to the line and enables operation in both directions (left/right) without rebuilding the workstation layout.




Infeed hopper + bag stand platform

The profiled hopper directs the product straight into a bag or carton. A bag/carton platform is located under the outlet, ensuring comfortable and repeatable filling (with the option to install a scale).



Belt with impact dampers

Cushion-shaped cleats act as impact dampers, reducing product drop impact during the weighing and packing process.

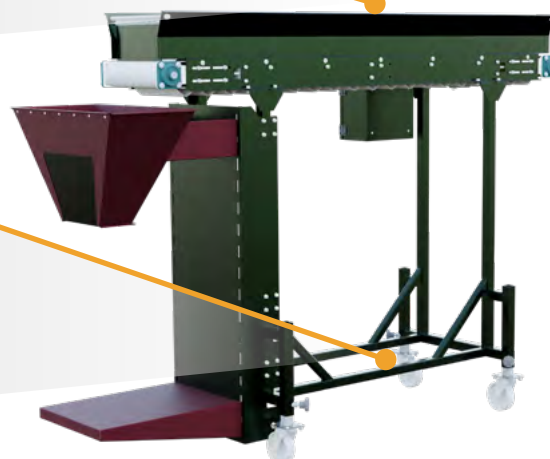

Mobile frame and adjustments

Frame on four swivel castors (with brakes) plus height and discharge adjustment. Quick set-up for different net bagger models and varying line heights.

	RA-PP-00
Width	700 mm
Length	2420 mm
Belt type	Cushioning corrugated belt
Cleat type	Wave
Optional extras	Frequency inverter



The cascade-structure filler enables loading of big bags (FIBCs) and pallet boxes. It can be equipped with a single or double cascade with nine flaps. The machine is controlled via a clear, 7-inch touchscreen display. A weighing scale can also be installed on the loading platform, so that once the preset amount of product has been loaded, the filler will automatically stop.



Folding cascade

A folding cascade is installed at the outlet of the filler to protect the product from bruising and impact damage.

Low base

A low base for a big bag or crate/pallet box facilitates loading and unloading.

Option to install a scale

The filler can operate based on a weighing scale, which stops filling once the set target weight is reached.



	NK-1	NK-2
Number of weighing sections	1	2
Machine height	315 cm	315 cm
Number of cascades	9	9
Power consumption	0,75 kW	0,75 kW
Electrical connection	3×400 V 5 m cable 32A 5P plug	
Optional extras	Scale	

22

ROTARY ACCUMULATION TABLES



The rotary table is designed for product buffering and manual accumulation at the end of the processing line or before packing. The rotating tabletop ensures a continuous and even supply of produce to operators, while the perimeter guard prevents product from spilling off the table. Stepless speed control and the ability to reverse the rotation direction allow the unit to be matched to the line speed and workflow. The machine is built on a mobile frame, enabling quick repositioning and fast changeovers.



Stepless speed control / reverse rotation

Adjustable rotation speed and left/right rotation (clockwise / counter-clockwise) help stabilise product flow. An operator panel with an emergency stop button ensures simple and safe operation.



Mobile frame with locking wheels

Frame on four swivel castors with brakes. Easy adjustment of the working height allows quick alignment with neighbouring machines on the line.

	SO-150
Tabletop diameter	1500 mm
Power consumption	0,55 kW
Power supply	400 V
Height adjustment	+300 mm
Rotation speed	140 rpm
Rotation direction	Left/Right (reversible)
Optional extra	Frequency inverter (VFD)



Packing buffers are designed for manual sorting followed by packing vegetables and fruit into crates. The unit is fitted with four castors, allowing easy relocation within the facility. Agro-Weld buffers are available in single- or double-station versions. Each station features an individual shut-off flap to improve control over the packing process. A crate platform is positioned under the outlet, with the option to install a scale.

Large sorting surface

The large sorting area makes product selection easier for the operator and enables short-term buffering of product portions.

Shut-off flaps

The flaps allow the outlet to be reduced or fully closed, providing control over the loading rate.

Platform with scale option

A crate platform is located under the outlets, with the option to install a scale. This solution facilitates packing into cartons, bags or crates.



	BU-12	BU-20
Width	120 cm	200 cm
Length	97 cm	97 cm
Number of stations	1	2
Infeed height	120 cm	120 cm
Discharge height	105 cm	105 cm
Standard equipment	Crate platform; outlet shut-off slide gate	
Optional extras	Stainless-steel version; scale on platform	

Verbruggen palletizers are systems for automatic stacking of products on pallets. They work efficiently with bags, crates, and cartons. The selection of the appropriate model and configuration depends on the type of packaging, the required production rate, and the conditions of operation at the plant. Depending on the solution, maximum capacity reaches 10–40 bags/min for bagged products and 20–80 cartons/min for boxed packaging. The devices allow precise adjustment of layer parameters to the product format and dimensions, ensuring a flat, stable pallet ready for further transport or storage. The system can cooperate with product feeding elements and pallet handling units, ensuring a smooth and repeatable process.




Parameter	Palletizers for bags (VPM-5...VPM-14)	Palletizers for boxes and crates (VPM-BL...VPM-VHV)
Models (examples)	VPM-5 / VPM-5P / VPM-7 / VPM-8 / VPM-10 / VPM-14	VPM-BL / VPM-ACP / VPM-VHV
Maximum capacity	10–40 pcs/min	20–80 pcs/min
Nominal capacity (5 pcs per layer)	550–1710 pcs/hour	780–2030 pcs/hour
Nominal capacity (13 pcs per layer)	550–2280 pcs/hour	1150–4065 pcs/hour
Maximum layer dimensions	1600 × 1250 mm	1250 × 1250 – 1350 × 1350 mm
Maximum package weight	25 / 50 kg (depending on manipulator)	25–50 kg (depending on configuration)
Minimum package dimensions	350 × 220 × 50 mm	200 × 200 × 100 mm
Maximum package dimensions	up to approx. 930 × 590 × 325 mm (depending on model)	up to 400 × 600 × 400 mm
Product infeed level	low / high (depending on model)	low / high (depending on model)
Automation (options)	pallet transport/infeed, stretch wrapping, layer pads, buffering	pallet transport/infeed, layer pads, line integration

Scan the code and
download the full
palletizer catalog!



25

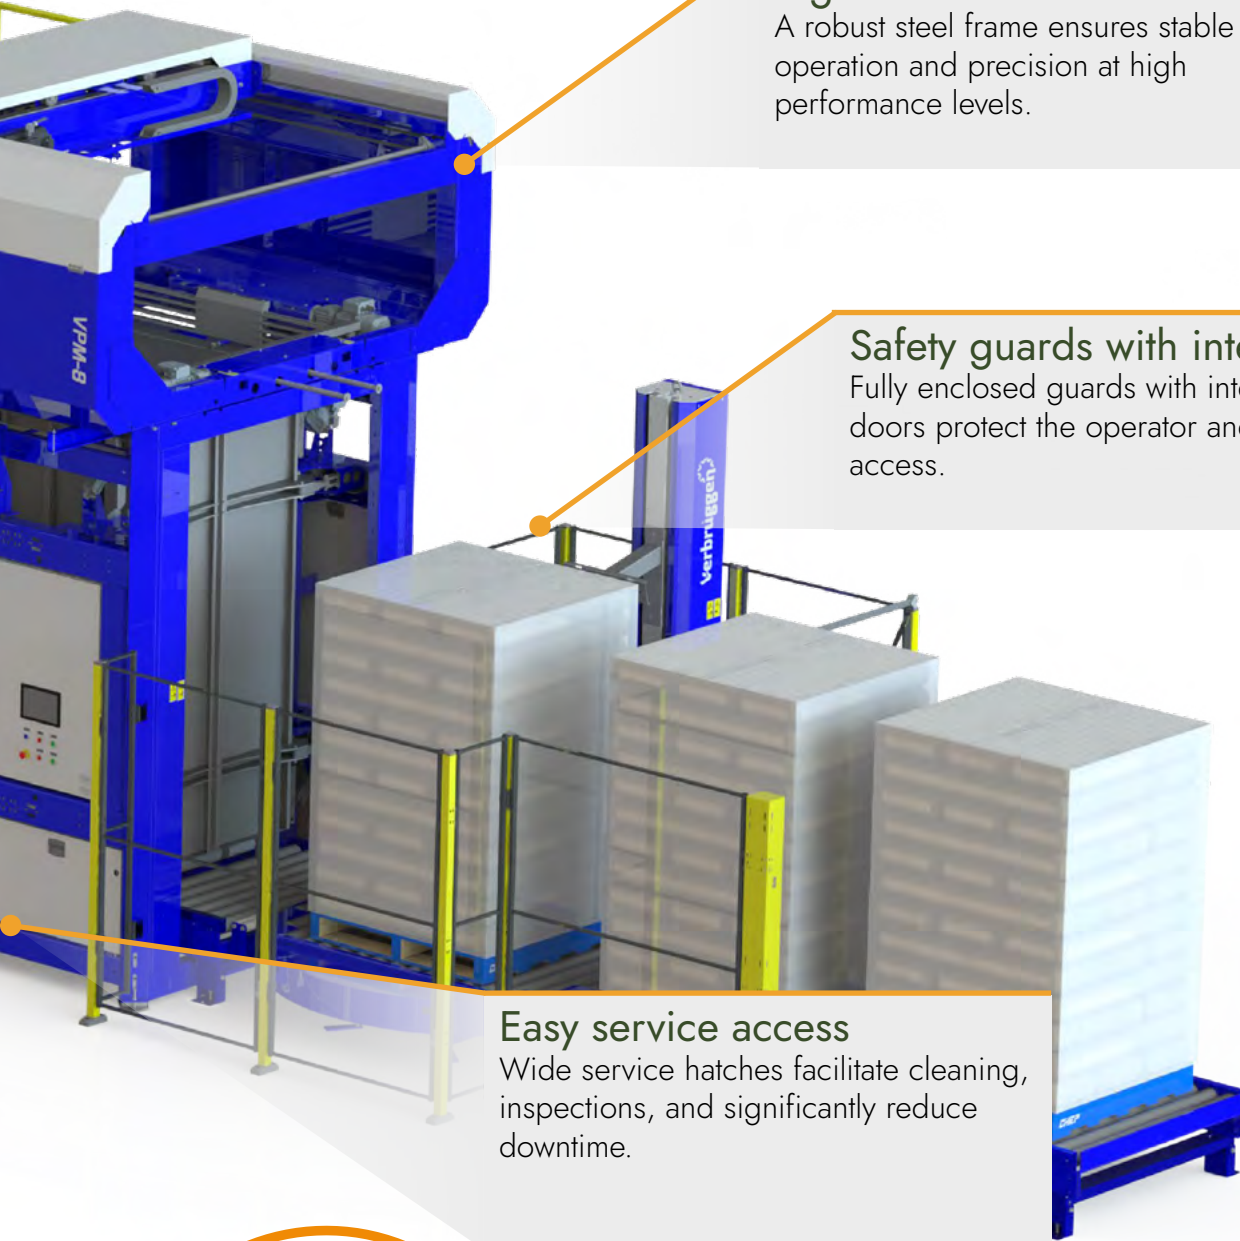

Rigid steel construction

A robust steel frame ensures stable operation and precision at high performance levels.

Safety guards with interlocks

Fully enclosed guards with interlocked doors protect the operator and restrict access.

Easy service access

Wide service hatches facilitate cleaning, inspections, and significantly reduce downtime.




Did you know that our fully automatic palletizing solutions can be extended with several additional devices like a sheet dispenser, wrapper or strapper?

Verbruggen
Palletizing Solutions

Product overview

Verbruggen Palletizing Machines
suitable for boxes

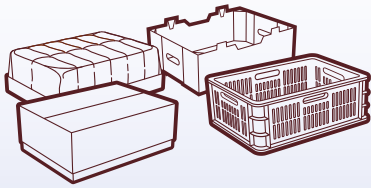

Features



MODEL	VPM - BL	VPM - ACP	VPM - VHV
GENERAL FEATURES			
TOUCH SCREEN WITH USER FRIENDLY INTERFACE	✓	✓	✓
EASILY CONFIGURABLE STACKING PATTERNS	✓	✓	✓
REMOTE ACCESS MODULE	✓	✓	✓
PRODUCT INFEED			
HIGH INFEED LEVEL	△	✓	✓
LOW INFEED LEVEL	✓	X	X
RIGHT-ANGLED INFEED SECTION	✓	✓	X
INLINE INFEED SECTION	X	X	✓
STACK / SUPPORT HANDLING			
AUTOMATIC STACK / SUPPORT TRANSPORT	△	✓	✓
VERTICAL COMPRESSION	X	X	X
4-SIDED STACK ENCLOSURE	X	X	X
SAFETY / ACCESSIBILITY			
ENTRANCE PROTECTION	✓	✓	✓
ACCESS PLATFORM	△	✓	✓

Specifications

CAPACITY (MAXIMUM RATES DEPENDS ON CONFIGURATION)				
MAXIMUM	UNITS/MIN.	20	35	80
NOMINAL WITH 5 UNITS PER LAYER	UNITS/HOUR	780	1100	2030
NOMINAL WITH 13 UNITS PER LAYER	UNITS/HOUR	1150	1680	4065
MAXIMUM LAYER DIMENSIONS	MM	1250 x 1250	1350 x 1350	1350 x 1350
PACKAGING				
MAXIMUM WEIGHT (MEDIUM/LARGE MANIPULATOR)	KG	50	25	25
MINIMUM DIMENSIONS *1	MM	200 x 200 x 100	200 x 200 x 100	200 x 200 x 100
MAXIMUM DIMENSIONS	MM	400 x 600 x 400	400 x 600 x 400	400 x 600 x 400

LEGEND: ✓ = STANDARD △ = OPTIONAL X = NOT AVAILABLE / *1 = BASED ON 1 PACKAGE PER DROP. OPTIONS FOR SMALLER PACKAGE HANDLING AVAILABLE ON REQUEST.

Verbruggen Palletizing Machines suitable for bags



VPM - 5



VPM - 7



VPM - 8



VPM - 10



VPM - 14

✓	✓	✓	✓	✓
✓	✓	✓	✓	✓
✓	✓	✓	✓	✓

X	✓	✓	✓	✓
✓	X	X	X	X
✓	✓	✓	✓	✓
✓	✓	✓	✓	✓

△	X	✓	✓	✓
X	✓	✓	✓	✓
X	✓	✓	✓	✓

✓	✓	✓	✓	✓
X	✓	✓	✓	✓

10	18	18	30	40
550	920	970	1310	1710
550	975	1025	1710	2280
1600 x 1250	1600 x 1250	1600 x 1250	1600 x 1250	1600 x 1250

25/50	25/50	25/50	25/50	25/50
350 x 220 x 50	350 x 220 x 50	350 x 220 x 50	350 x 220 x 50	350 x 220 x 50
900 x 560 x 240	880 x 590 x 325	880 x 590 x 325	880 x 590 x 325	880 x 590 x 325

LEGEND: ✓ = STANDARD △ = OPTIONAL X = NOT AVAILABLE

Bin unloading

Receiving & buffering

Cleaning

Sorting

Selection

Weighing & counting

Packaging

Conveyors

Weeding

Production lines

28

PALLET FORMERS



Agro-Weld pallet formers are simple and functional devices designed to optimise the process of stacking bags on a pallet. The former consists of three side walls that act as guides for the bags arranged on the pallet, and a lower front wall which—depending on the mounting depth—defines the size of either a Euro pallet (1.2 m × 0.8 m) or an industrial pallet (1.2 m × 1.0 m).

Removing the completed pallet from the former is carried out without disturbing the neatly stacked load. In the first step, the front wall is removed. Next, the remaining three hinged walls are unfolded and moved away on wheels into an open “C”-shaped (trapezoidal) layout, allowing the pallet to be pulled out freely. This solution ensures that, during pallet removal, the device components do not come into contact with the stacked bags and therefore do not deform the pallet load.



Wheels

The structure is fitted with four wheels, allowing the machine to be easily moved to another location.

Simple and quick assembly

Thanks to its simple and well-thought-out design, the Agro-Weld pallet former is easy and quick to assemble.



Robust construction

The use of stainless steel prevents material damage and protects against corrosion.

The frame is made of powder-coated steel, while the protective sheet panels are made of galvanised steel.

	FP-1280	FP-1210
Working width	800 mm	1000 mm
Overall length	1200 mm	1200 mm
Height	2200 mm	2200 mm




Agro-Weld

Agro-Weld conveyors are versatile transport solutions, ideal for a wide range of industries. Our product range includes belt conveyors, roller conveyors, and modular belt conveyors, which we customise to meet specific customer requirements, ensuring smooth and efficient material handling at every stage of production. With a wide selection of available options, our conveyors can be configured even for the most demanding applications. We offer various belt types and cleats/flights, enabling precise transport of loads with different shapes and properties—making our conveyor systems an ideal solution for operations of any production scale.

BELT CONVEYORS			
Available widths	20–90 cm	Available lengths	1–12 m
Incline angle	0–50°	Belt thickness	3–10 mm
Belt types	Modular belts; PVC belts (food-grade certified or standard); rubber belts; polyurethane belts; mesh belts; slat belts; acetal chains.		
Cleat / flight options	All cleat/flight types available on the European market.		
Optional extras	VFD control box; stainless-steel (acid-resistant) construction; sidewalls; food-grade certified belts.		

BELT CONVEYOR WITH DIVIDERS

The belt conveyor is equipped with dividers, enabling product sorting and controlled filling of buffer units. The discharge outlets are fitted with cascade chutes, preventing product bruising and impact damage. The machine can be equipped with a motor with a frequency inverter (VFD) for convenient speed control. The number of outlets and dividers, as well as the conveyor height, can be tailored to the customer's individual requirements.

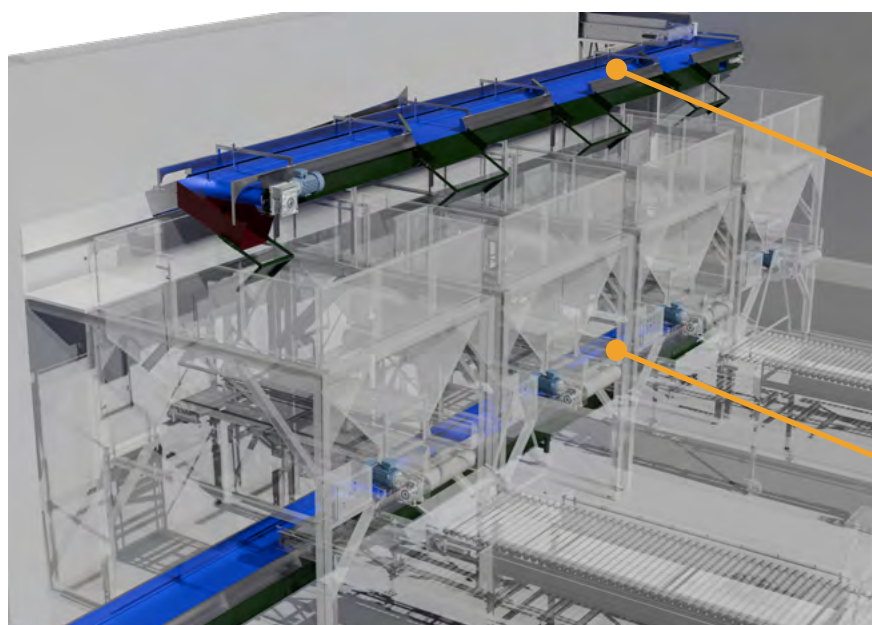

Belt conveyor with dividers

Low-profile belt conveyor

30 HORIZONTAL BELT CONVEYORS

Agro-Weld horizontal belt conveyors are a simple and universal solution for horizontal transport in various production processes. Their straightforward design makes operation easy and reduces maintenance requirements, while ensuring smooth and stable performance. Optional features such as adjustable side walls and cleats (flights) allow the transport of products of different shapes and sizes, making these conveyors a versatile choice for any production line.



INCLINED BELT CONVEYORS

Agro-Weld inclined belt conveyors, including knuckle (Z-type / hinged) conveyors, are efficient solutions for moving goods on production lines with height differences. Thanks to motors with frequency inverters, the conveyor speed can be adjusted to match the type of material being transported. Various belt and cleat options make them suitable for both light and heavier loads. Knuckle conveyors operate at angles of up to 50°, enabling efficient use of available space. PVC belts with cleats allow reliable product transport on an incline. The ability to customise belt width and conveyor length ensures wide application flexibility. Feed hoppers in different sizes and shapes are available to increase system capacity and provide product buffering. Additional wheels make the unit easy to reposition.



A belt conveyor fitted with horizontal cleats, designed for transporting waste material and rejects/off-grade product. Thanks to the compact belt and hopper dimensions, the conveyor can be used together with inspection/selection tables. This solution allows waste to be automatically removed from the production line and discharged into a dedicated collection area, keeping the line clean and organised.



BULK MATERIAL CONVEYOR

A conveyor designed for transporting and filling bags with bulk materials such as coal or pellets. A frequency inverter (VFD) enables speed adjustment. The conveyor is controlled via a foot pedal, and an optional weighing system/scale can be installed. Above the bag stand there is a bag holder that makes it easier to attach and secure the bag. The conveyor can also be used as a semi-automatic weighing and bagging solution for bulk materials. The machine is equipped with a belt featuring V-shaped cleats, ensuring smooth and stable product feed.



32


ROLLER CONVEYORS

Agro-Weld offers roller conveyors that are an excellent solution for a wide range of industrial applications. With a robust construction and customisable configurations, these conveyors effectively support internal transport processes in production facilities. Roller conveyors operate using a roller system that enables smooth movement of loads. They can work in a gravity mode, where products are moved manually, or in an automatic powered mode with a drive unit. Rollers made from durable materials provide safe transport of both light packages and heavy pallets.



MODULAR BELT

A modular belt made from durable plastic, wear-resistant and easy to keep clean. Its segmented design enables quick assembly and servicing, while ensuring stable and smooth product transport.

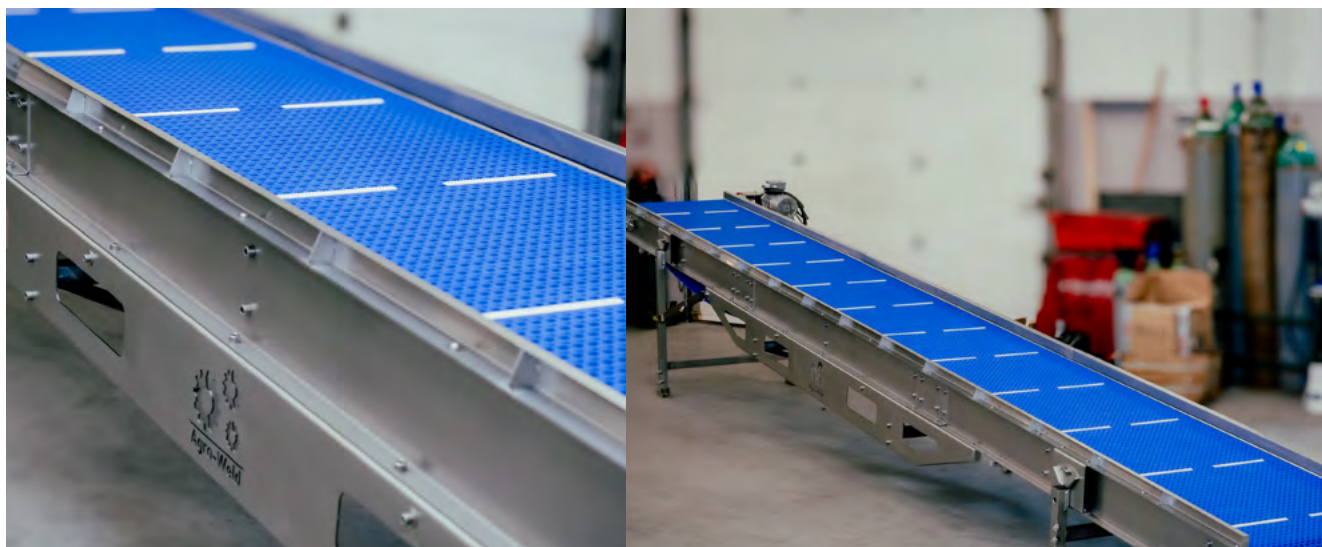

RIDGE-BED WEEDER / CULTIVATOR

33




Agro-Weld

The weeder enables mechanical inter-row weeding and shaping of ridge sides in vegetable crops. Each working section is mounted on a parallelogram linkage with gauge wheels, ensuring a constant working depth even on uneven ground. A set of interchangeable tools (knives/goosefoot sweeps, chisels, crop protection discs, ridge-shaping bodies) allows the working aggressiveness to be adjusted to the soil type and crop growth stage. The modular design makes it easy to configure and mount the machine to match the required row spacing and number of rows.

Parallelogram working sections

They guide the tools precisely at the set working depth. Gauge wheels stabilise each section and reduce the risk of crop.

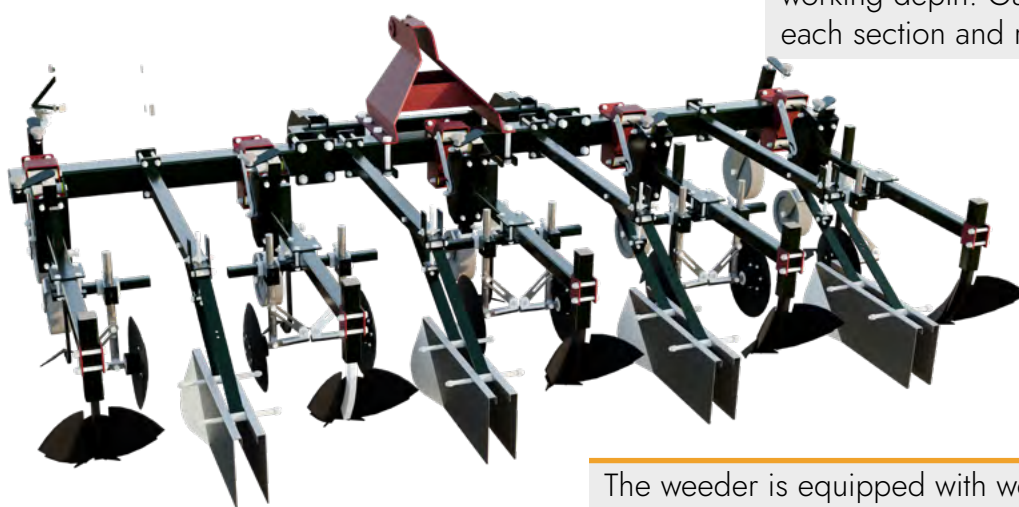

Row crop protection discs

They protect plants from being covered with soil and help guide the soil flow. Adjustable spacing and height allow operation close to the row.

The weeder is equipped with working discs operating in the ridge, which cut through soil and weeds and guide the main working knife responsible for cutting them. Crop shields prevent soil from covering the plants during operation. A fertiliser dosing unit enables precise application directly onto the ridge during weeding, ensuring even fertiliser placement in the crop root zone.

	Pip-4	Pia-4
Number of sections	2-4	4-6
Hitch	3-point hitch	3-point hitch
Minimum tractor power	30-50 HP	30-50 HP
Row spacing range	Fully adjustable	Fully adjustable
Working width	3350 mm	3350 mm
Working depth	Shallow; disc working range 1-5 cm	Shallow (surface operation)
Working speed	5-10 km/h	5-10 km/h
Optional extras	Fertiliser applicator (side-dressing unit)	Fertiliser applicator (side-dressing unit)

Bin unloading

Receiving & buffering

Cleaning

Sorting

Selection

Weighting & counting

Packaging

Conveyors

Weeding

Production lines

34


PRODUCTION LINES TAILORED TO CUSTOMER NEEDS

The cleaning, sorting and packing lines offered by Agro-Weld are advanced technological solutions developed to deliver maximum efficiency and precision. Every stage — from thorough cleaning, through smooth sorting, to accurate packing — has been engineered to meet the highest standards and address real operational needs. Our lines not only enable automation, but also improve productivity and reduce process errors.

These solutions are designed for both large enterprises and small-to-medium farms and producers looking to optimise their operations. Thanks to the modular design and flexible configuration options, our lines can be perfectly adapted to any production scale. For smaller companies, this is an opportunity to accelerate processes without significant capital investment; for medium-sized operations, it offers increased efficiency and improved product quality. At Agro-Weld, we focus on solutions that support our customers' growth, regardless of the size of their business.




ADVANCED STAINLESS-STEEL CITRUS COUNTING AND PACKING LINE (INOX)

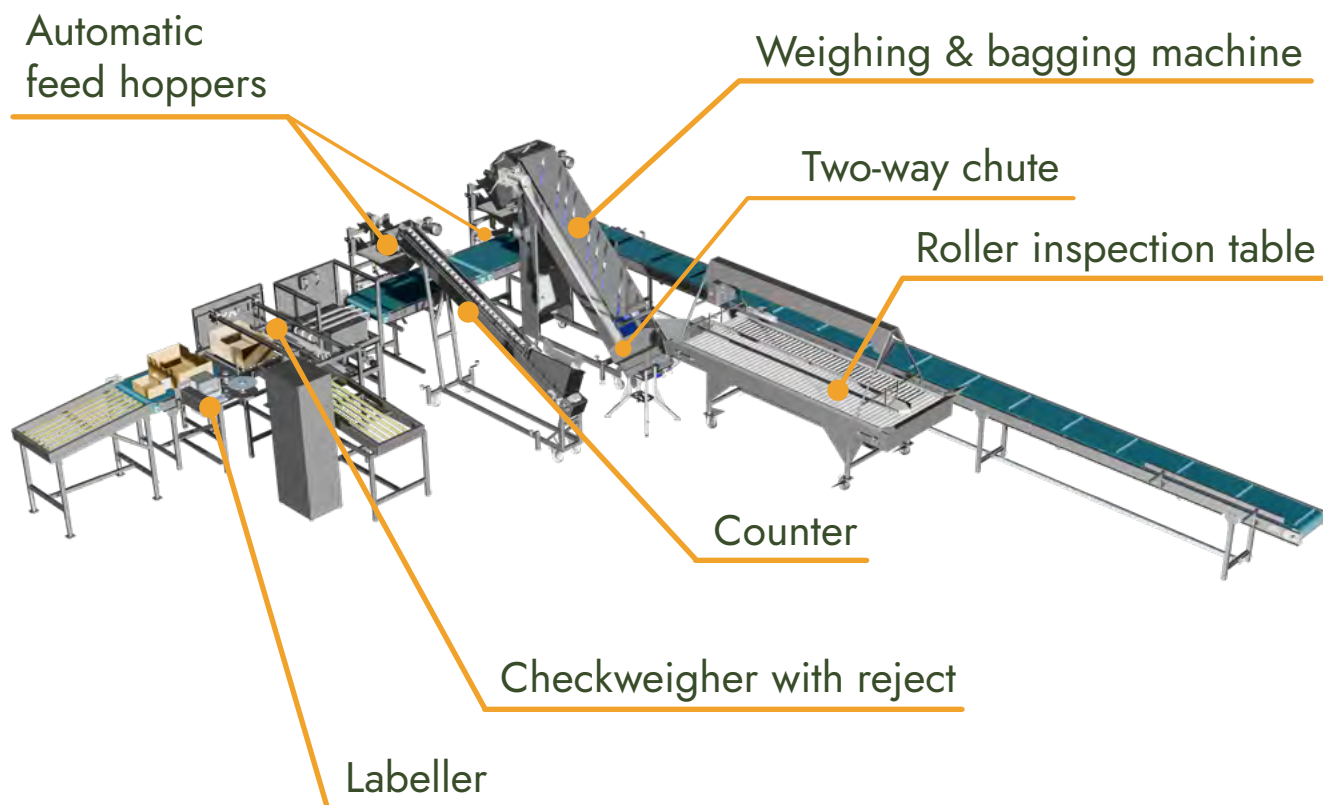


PROPOSED GRADING AND WEIGHING LINE

35

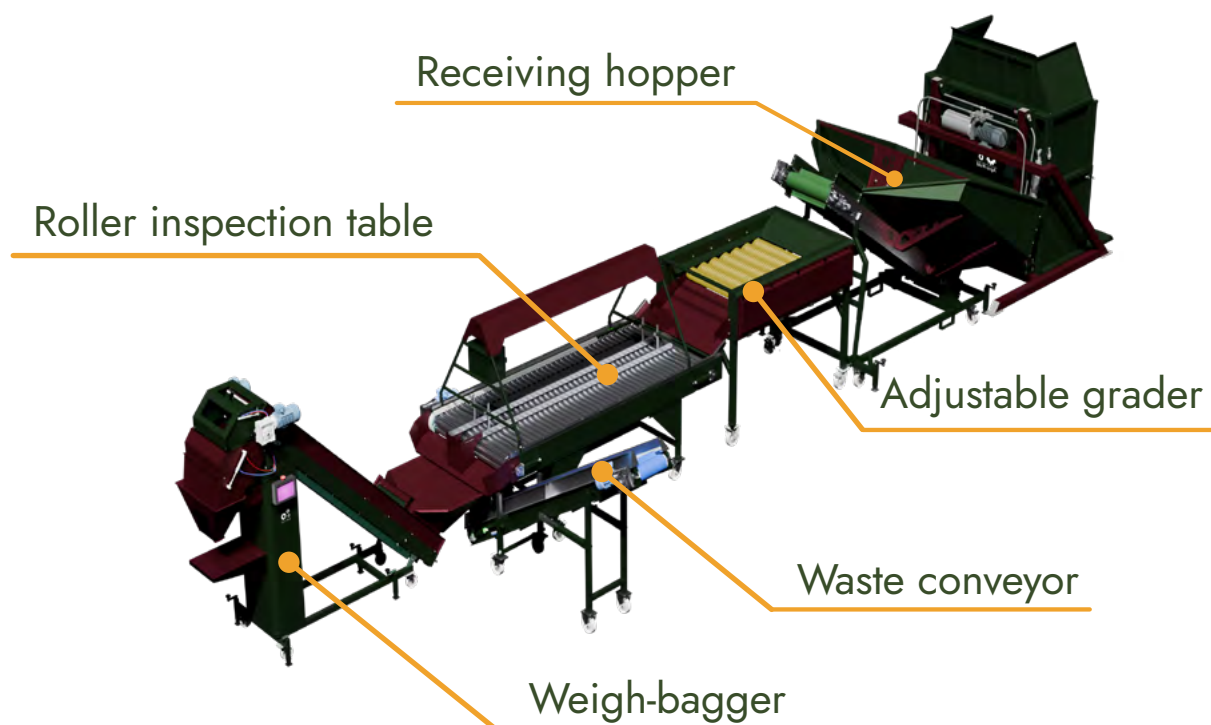

LINE FOR VEGETABLE CLEANING, WASHING AND PACKING

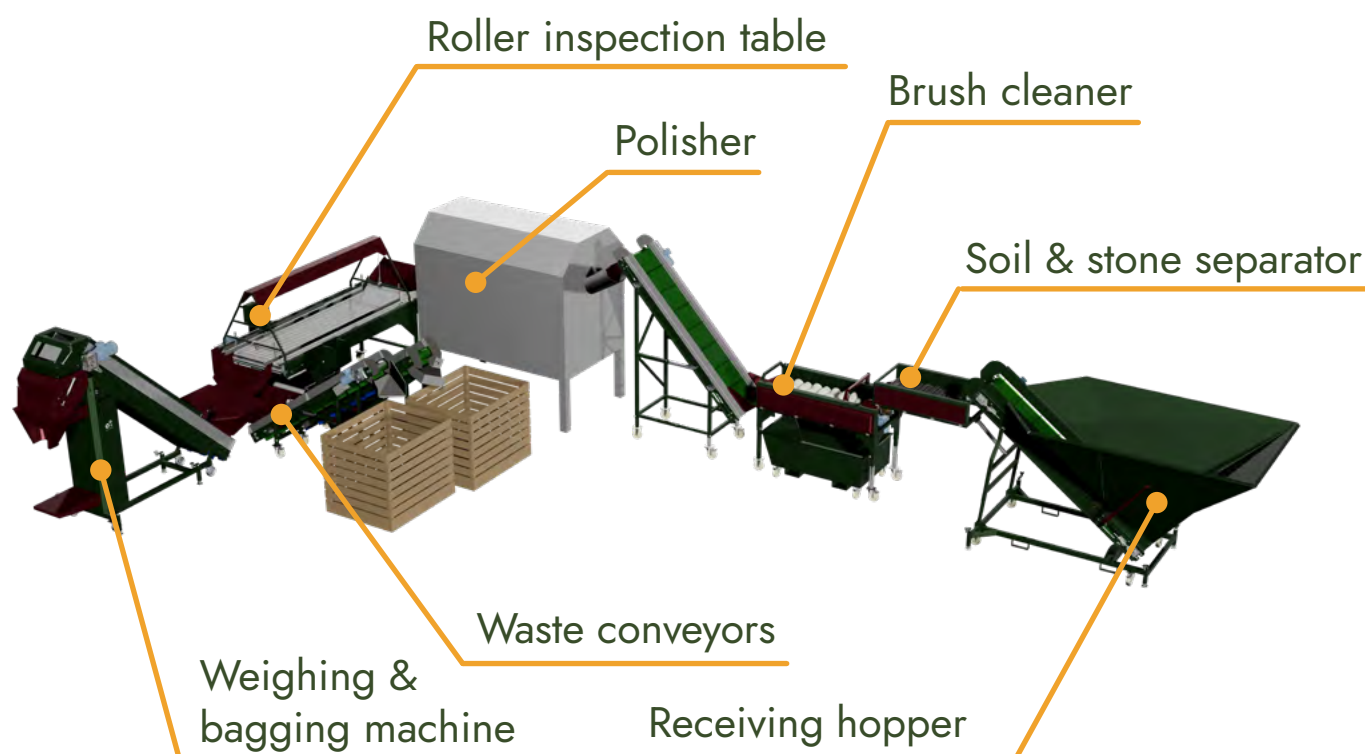

Bin unloading

Receiving & buffering

Cleaning

Sorting

Selection

Weighing & counting

Packaging


Conveyors

Weeding


Production lines

36

LINE FOR ONION BUFFERING AND MANUAL SORTING

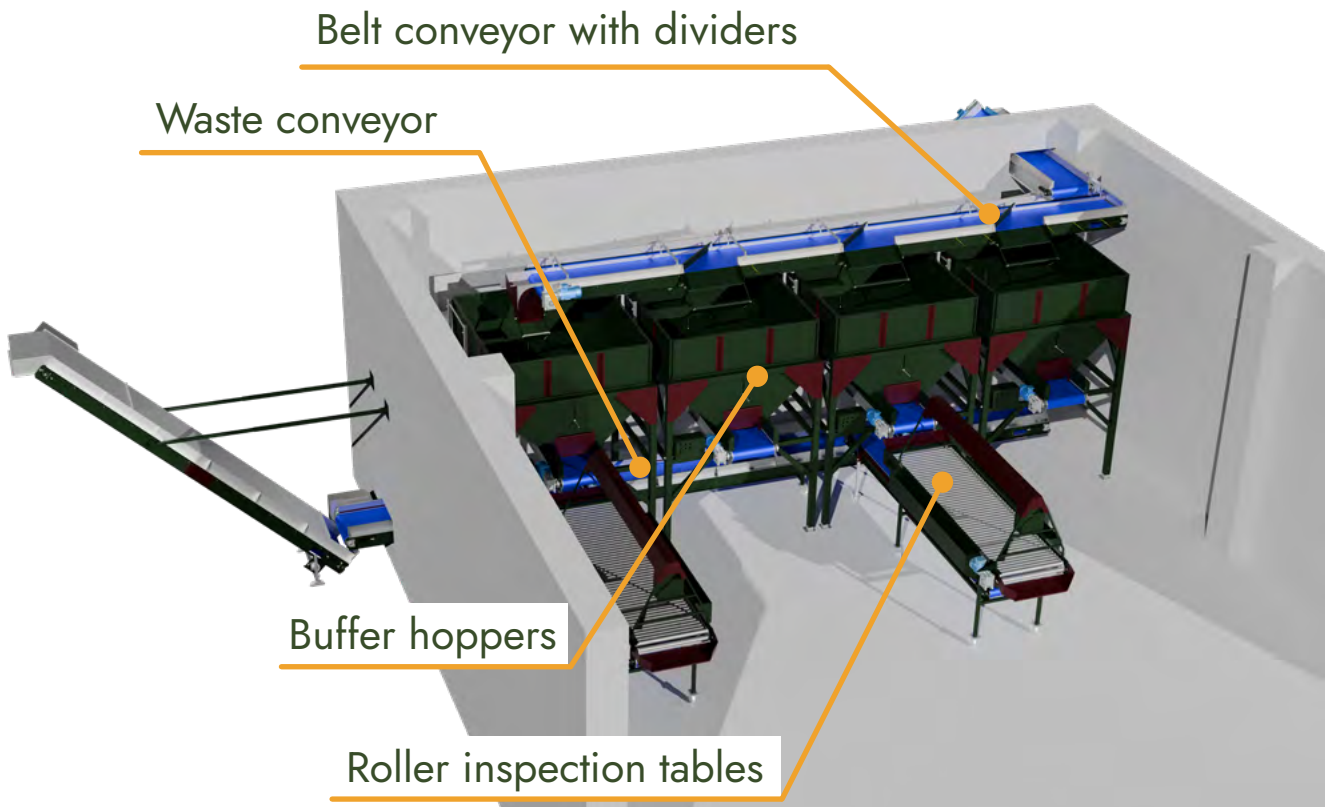


PROPOSED CLEANING AND PACKING LINE

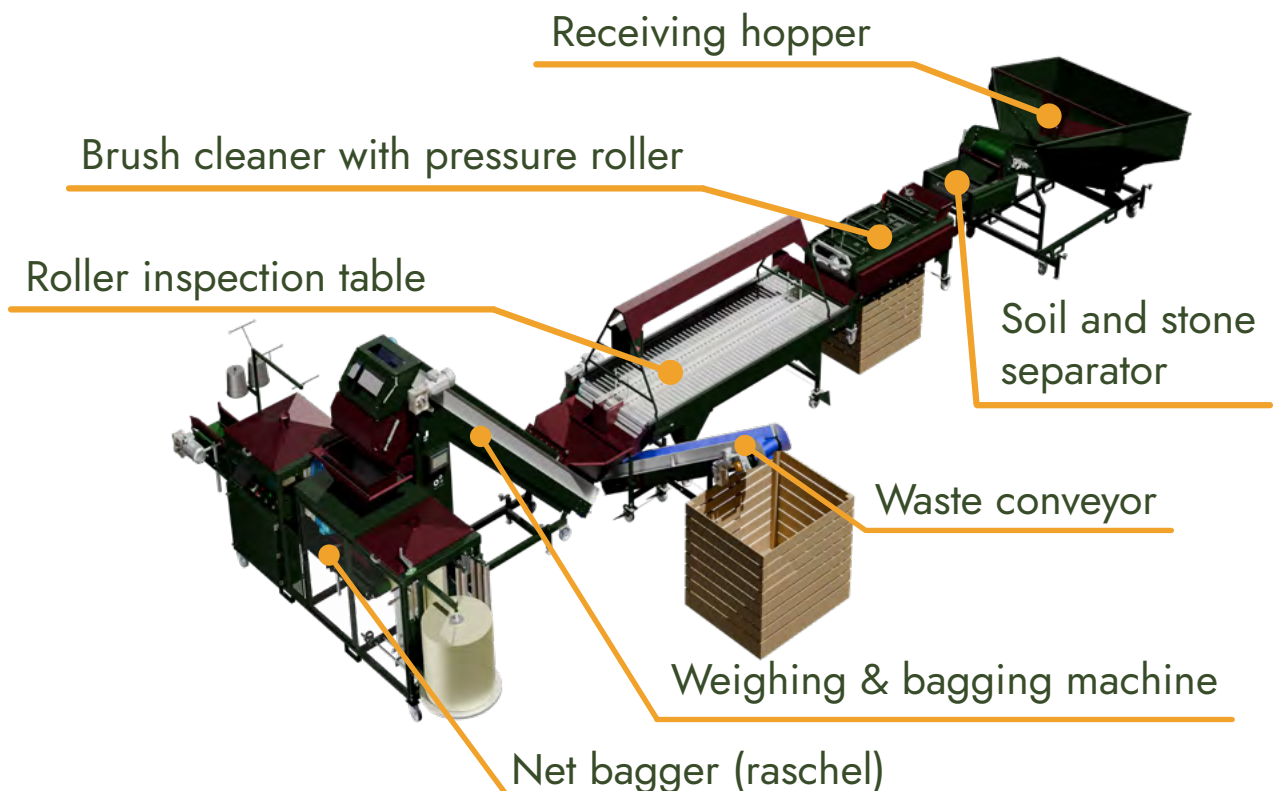


PROPOSED LINE FOR GRADING AND PACKING

37

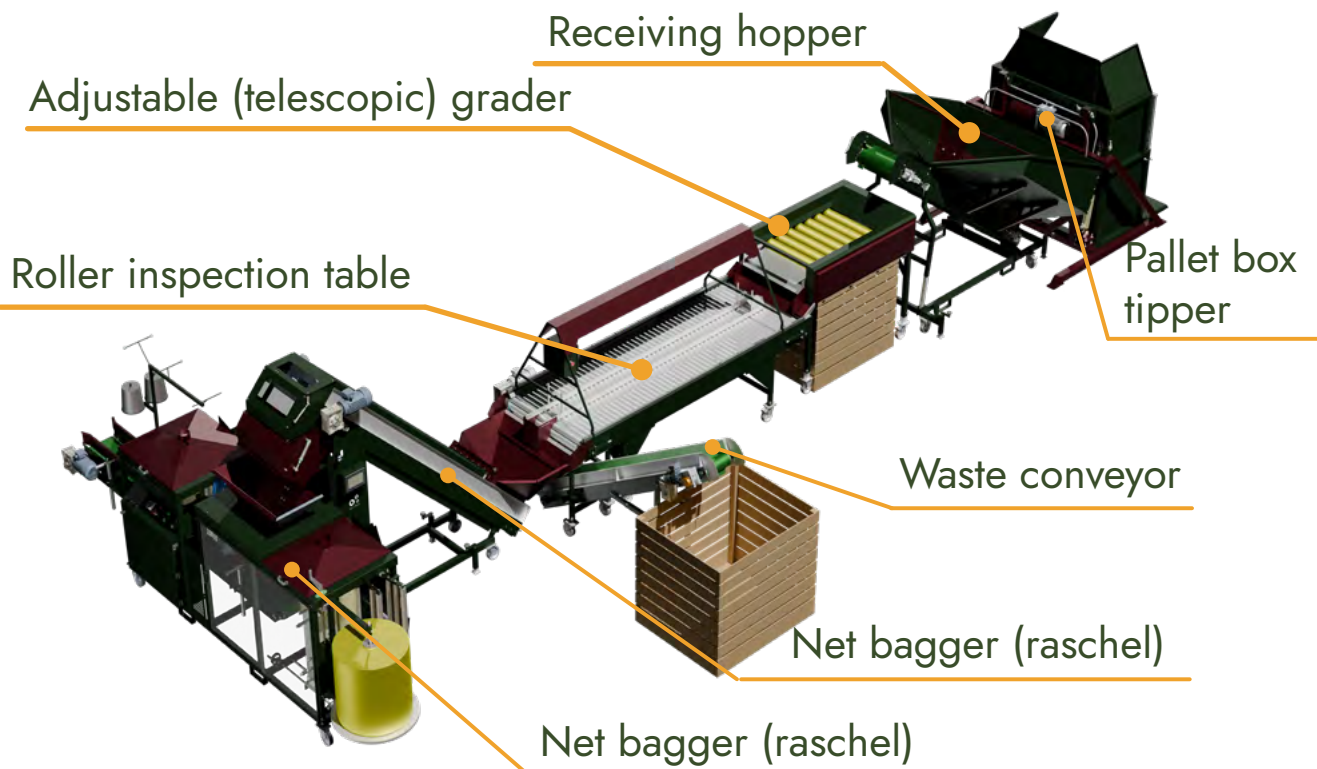

SWEET POTATO SORTING AND MANUAL PACKING LINE

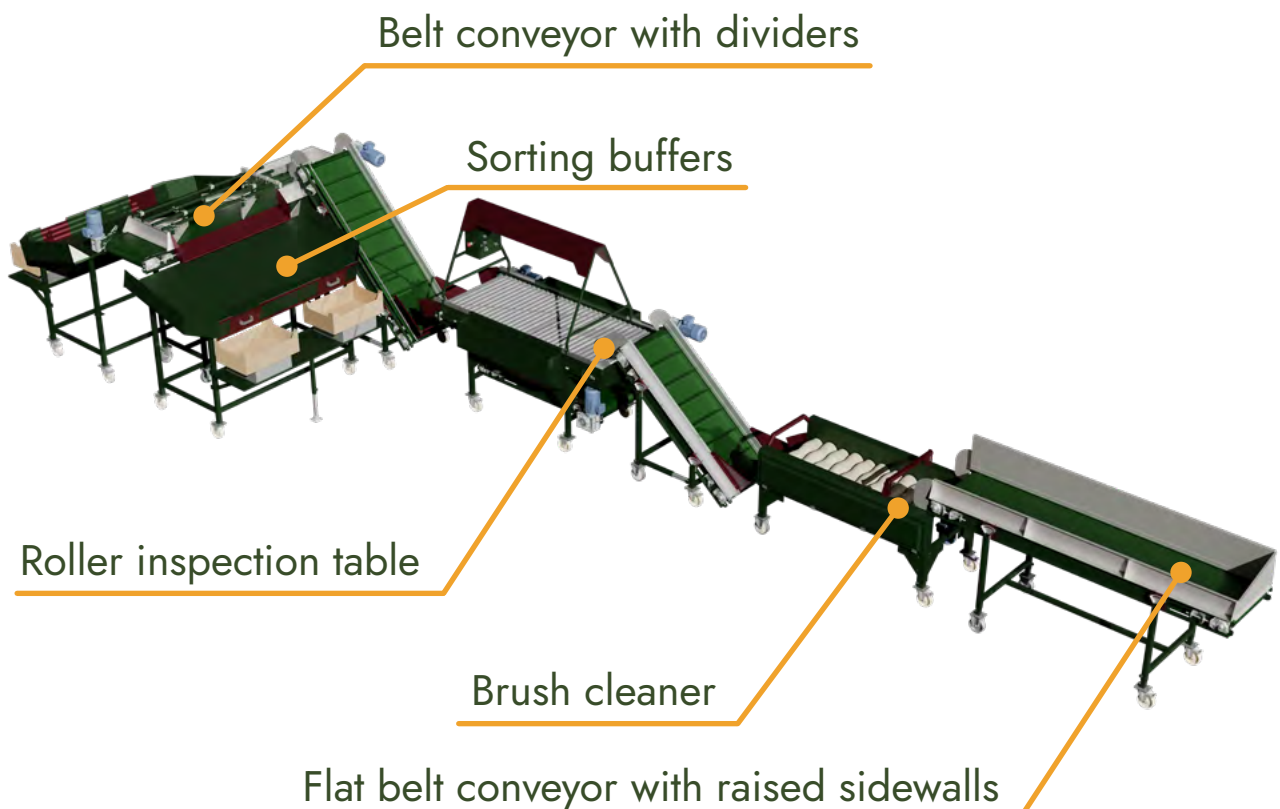

Bin unloading

Receiving & buffering

Cleaning

Sorting

Selection

Weighing & counting

Packaging

Conveyors

Weeding

Production lines

At Agro-Weld, we also offer special solutions tailored to non-standard transport requirements that do not fit into typical conveyor categories. We design and manufacture custom conveyors to order, taking into account specific requirements regarding shape, functionality, and operating conditions.

Whether you need conveyors with special dimensions, equipment with additional positioning and stabilisation systems, or solutions designed for operation in demanding environments, we develop and build machines to meet our customers' individual requirements. Our experience and flexible approach enable us to create bespoke designs, fully adapted to specific needs and production processes.


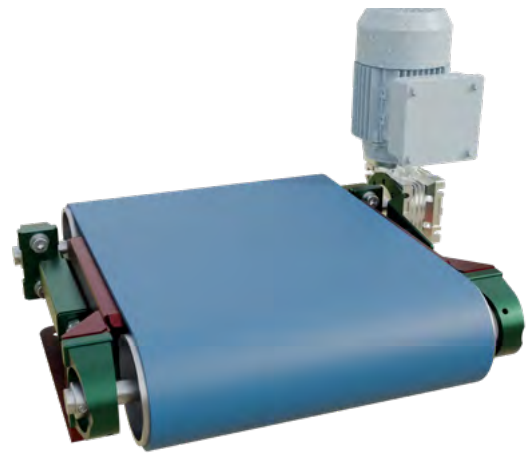


TABLE OF CONTENTS

ABOUT US.....	2
CRATE UNLOADING.....	3
RECEIVING AND BUFFERING.....	4
CLEANING.....	7
SORTING.....	11
MANUAL GRADING.....	14
WEIGHING AND COUNTING.....	16
PACKING.....	19
PALLETIZING.....	24
CONVEYORS.....	29
WEEDING.....	33
PRODUCTION LINES.....	34
SPECIAL SOLUTIONS.....	38



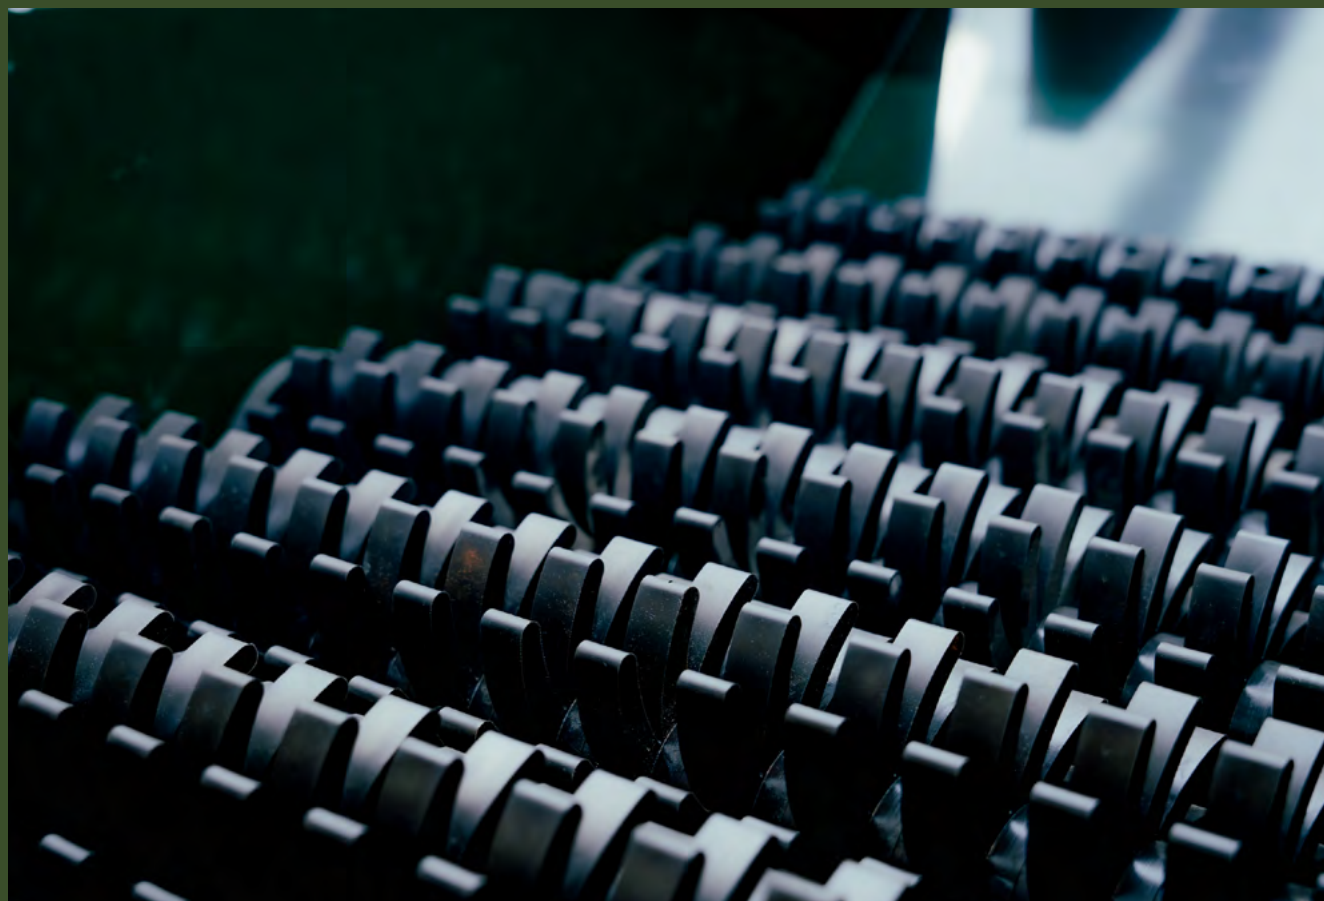

Agro-Weld Arkadiusz Cegłowski
Prądyńskiego 16, Środa Wielkopolska, Poland.
www.agro-weld.pl
biuro@agro-weld.pl
+ 48 725 140 257 | +48 608 230 369