

Everacid[®] / Everset[®]

Acid Dyes



Better Chemistry
Better Life


Everlight
Chemical

EVERACID / EVERSET DYES

中文版

染料及手冊使用說明	A-6 ~ A-21 頁
染料色樣及特性表	A-44 ~ A-50 頁
染料特性及牢度資料表	1 ~ 130 頁

English Version

Dyes and manual description	A-26~ A-42
Dyes color samples and characteristics table	A-44~ A-50
Dyes characteristics and fastness data sheet	1 ~ 130

EVERACID / EVERSET DYES

中文版

Better Chemistry Better Life

品牌承諾

永光化學追求進步創新，以滿載的研究熱情，透過不斷的加乘與連結，創造出許許多多的可能。永光，以化學專業給予客戶最大支持，協助客戶邁向成功，也為美好的社會及永續的未來，做出具體貢獻。我們相信，運用對的化學品，可以讓生活更美好！

品牌價值

永光化學相信，運用對的化學品，可以讓生活更美好！

穩健可靠

正派經營的理念、履行承諾的決心、穩定的品質與貼心的服務，奠定永光化學的品牌信賴感。

以客為尊

專注於化學本業，滿載研究熱情，永光化學追求突破與進步，讓化學對人類的貢獻，無止境地向前演進。

進步創新

關懷顧客、共創價值是永光化學的品質政策。我們以高品質產品、服務與技術支援，給予客戶支持，協助客戶邁向成功。

造福人群

提升人類生活福祉，是永光存在的意義；以不斷進步的化學專業，為更好明天與永續未來，做出具體的貢獻。

目錄

1.前言.....	A-8
2. 永光酸性染料分類	A-8
2.1 Everacid A Type	A-8
2.2 Everacid N Type	A-9
2.3 Everacid S Type	A-9
2.4 Everset M Type	A-9
2.5 Everset PA Type	A-10
2.6 Everacid X Type.....	A-10
2.7 永光酸性染料分類圖(Nylon 染色)	A-11
3. 前處理	A-11
3.1 預定型	A-11
3.2 後定型	A-11
3.3 精練	A-12
4. 染色方法	A-12
4.1 染色 pH 值	A-12
4.2 繩狀、經軸、筒子紗染色 (Nylon)	A-13
4.3 吉革染色	A-13
4.4 一浴壓染蒸處工程	A-14
5. 改善染色物溼潤堅牢度的後處理加工.....	A-14
5.1 使用合成固色劑固色	A-14
6. 異常染色的重修	A-15
6.1 剝除固色劑	A-15
6.2 部分剝色與重修	A-15
6.3 剝色	A-15
7. 色卡特性說明	A-16
7.1 染色特性	A-16
7.2 一般特性	A-18
7.3 染色堅牢度的試驗方法	A-20
8. 染料三原色選擇	A-21

染料資訊索引頁

染料名稱 (Dyes)	頁數	染料名稱 (Dyes)	頁數
Everacid A Type		Everacid Rhodamine S-BN	67
Everacid Yellow A-FG	1	Everacid Violet S-RWN	69
Everacid Yellow A-4R	3	Everacid Blue S-BLW	71
Everacid Red A-2BN	5	Everacid Blue S-2R	73
Everacid Bordeaux A-RL	7	Everacid Turq. S-5G	75
Everacid Blue A-RRL	9	Everacid Green S-6G	77
Everacid Blue A-RL	11		
Everacid N Type		Everset M Type	
Everacid Yellow N-5GW	13	Everset Yellow M-2R	79
Everacid Yellow N-MR	15	Everset Red M-G	81
Everacid Yellow N-3RL	17	Everset Bordeaux M-B	83
Everacid Yellow N-3R	19	Everset Brown M-B	85
Everacid Orange N-G	21	Everset Blue M-2R	87
Everacid Orange N-GTL	23	Everset Navy M-R	89
Everacid Red N-B	25	Everset Grey M-G	91
Everacid Red N-2BL	27	Everset Black M-B	93
Everacid Red Brown N-V	29		
Everacid Rubine N-5BL	31	Everset PA Type	
Everacid Turq. Blue N-GRL	33	Everset Yellow PA-4G	95
Everacid Blue N-AFN	35	Everset Yellow PA-2G	97
Everacid Blue N-RL	37	Everset Yellow PA	99
Everacid Cyanine N-5R	39	Everset Orange PA-2R	101
Everacid Dark Green N-A	41	Everset Red PA-3G	103
Everacid Blue Black N-10B	43	Everset Red PA	105
Everacid Black LDN	45	Everset Red PA-4B	107
Everacid Black MR	47	Everset Bordeaux PA	109
Everacid Black LD	49	Everset Blue PA-2R	111
Everacid Black ACE	51	Everset Blue PA	113
Everacid Black S-MF	53	Everset Navy PA	115
		Everset Black PA-R	117
Everacid S Type		Everacid X Type	
Everacid Yellow S-7G	55	Yellow X-BW	119
Everacid Yellow S-4GL	57	Red X-BW	121
Everacid Orange S-GSN	59	Bordeaux X-BW	123
Everacid Red S-GS	61	Brown X-BW	125
Everacid Red S-3B	63	Blue X-BW	127
Everacid Red S-BL	65	Everacid Black X-BW	129
		Everacid Black X-BWE	131

1. 前言

永光酸性染料能以浸染、印花和壓染等方式應用於尼龍纖維。依牢度特性需求，亦被選用於羊毛及蠶絲之染色。

此技術手冊提供永光酸性染料廣泛用於尼龍纖維和與其它纖維的混紡織物以浸染方式的應用有關資料。

有許多因素會影響酸性染料於染色過程的行為表現，例如：纖維的形式、染色機台、染色深淺、染色 pH 值、染料親和性和助劑，因此由客戶自行訂定適合染程為宜。

這些推薦的永光酸性染料組合是著眼於下列因素：於染色 pH 之染料相容性，堅牢度特性，相似的移染性及橫條遮蓋性。

2. 永光酸性染料分類

永光酸性染料根據染料的應用特性：染料結構、移染性、親和力、染深性與組合性的關係，可區分如下：

(1) 非含金酸性染料：

Everacid A:	均染型酸性染料
Everacid N:	半縮絨型酸性染料
Everacid S:	(超)縮絨型酸性染料

(2) 1:2 型金屬複合酸性染料：

Everset M:	羊毛用酸性含金染料
Everset PA:	尼龍用酸性含金染料
Everacid X:	環保染深型酸性染料

2.1 Everacid A Type

Everacid A Type 染料應用上屬均染型酸性染料，即使在非常淺的顏色下也能提供極佳的日光牢度。主要應用於極淺色至淺色，有以下特性：

- 極佳之移染性及均染性
- 纖維橫條遮覆性佳
- 耐日光牢度佳。
- 非金屬型染料
- 淺濃度耐濕牢度佳，中深濃度則需固色後處理。

2.2 Everacid N Type

Everacid N Type 染料，應用上屬於半縮絨酸性染料，是目前紡織用酸性染料較為經濟，應用較廣的族群，主要應用在中至深色，特性如下：

- 深色染深性佳。
- 耐日光牢度屬中等至優。
- 中等濃度耐濕牢度佳，深濃度需固色後處理。
- 中等至佳之移染性。
- 遮覆性需搭配使用均染劑。
- 配色色域廣，亦可單色染色，色相鮮豔。
- 大多為非金屬型染料（黑色染料除外）

2.3 Everacid S Type

Everacid S Type 染料，屬於縮絨型酸性染料，具極佳的濕牢度與日光牢度，此類型大部分染料具有高彩度，主要應用於鮮豔色系，配色應用上建議選取主色搭配其他染料進行調色。

- 高彩度酸性染料
- 對不同型態尼龍染深性佳，如超細纖維。
- 深濃度耐日光牢度極佳。
- 深濃度耐濕牢度極佳。
- 染料相容性佳。
- 非含金染料

2.4 Everset M Type

Everset M Type 染料是由 1:2 型金屬複合酸性染料為主體所調和的酸性染料，具極佳的濕牢度與日光牢度，可用于染色所有聚醯胺纖維：絲綢，羊毛，兔毛和動物毛，具備經濟、色域廣的特色。

- 主要為 1:2 型含金複合型酸性染料。
- 對不同型態尼龍及羊毛染深性佳。
- 極佳耐日光牢度。
- 極佳深濃度耐濕牢度。
- 中等移染性。
- 染料相容性佳。

2.5 Everset PA Type

Everset PA 適用於尼龍和尼龍/彈性纖維染色，在各種尼龍上相容性優良，再現性極佳，並有很高的染深性及勻染性；選用適合的均染劑，可提高橫條遮覆性，具有極佳的日光及水洗牢度，傑出的染深性，尤其適合超細纖維染色。


- 主要為 1:2 型含金複合型酸性染料。
- 對不同型態尼龍染深性佳。
- 耐日光牢度極佳。
- 深濃度耐濕牢度極佳。
- 與 Everset M Type 染料相容性佳。

2.6 Everacid X Type

Everacid X 系列，為一新型的染料結構，可在濃染時大幅度的降低廢水，並在尼龍超細纖維上有極佳的染深性及濕牢度，具環保省水省成本優勢。

- 對尼龍超細纖維有極佳的染深效果
- 深色廢水極少
- 染越深，染深性及廢水差異越大
- 深濃度耐日光牢度極佳。
- 深濃度耐濕牢度極佳。
- 與 Everset M & PA 染料相容性佳。

2.7 永光酸性染料分類圖(Nylon 染色)

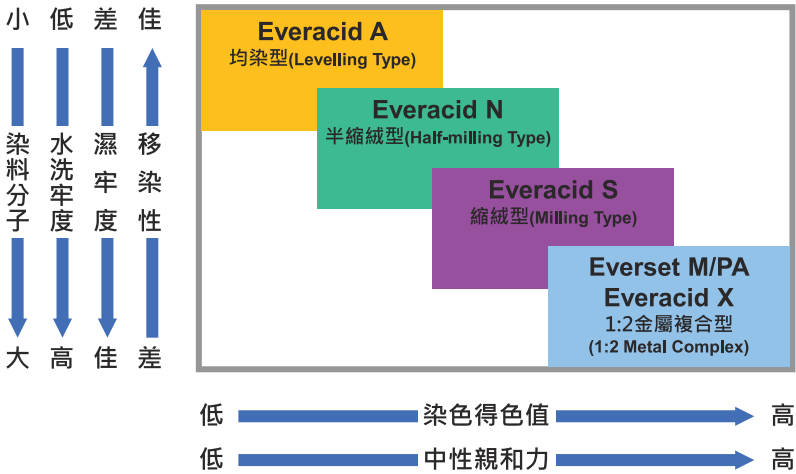

3. 前處理

3.1 預定型

為了避免某些尼龍織物於染色時發生折痕、縮率和捲邊等問題，必須於精練前先實施預定型，以獲得尺寸安定性。針對伸縮加工絲和高撚度紗織物，於預定型前，最好再實施鬆弛加工。

平織或針織物可由預定型獲得良好的尺寸安定性。最適合的預定型條件依織物材質型態和使用機台而定。預定型後，儘量快速冷卻織物。

	熱風		飽和蒸汽	
尼龍 6	180~190°C	15~30 sec.	110~120°C	20~30 sec.
尼龍 6,6	200~210°C	15~30 sec.	110~130°C	20~30 sec.

3.2 後定型

依據材質和染色機台、針織布和厚重平織布於染色前不須預定型，僅在染色完再施以定型處理，即可取得良好的尺寸安定性。

3.3 精練

尼龍纖維通常於織造時採用水溶性漿料，大部分並不會妨礙染色過程，因此尼龍的精練工程一般都省略掉。輕微退漿處理對尼龍的前處理即已足夠了，如果需要，可以下列方法處理。

3.3.1 批次精練

非離子界面活性劑	0.5 ~ 2.0 g/l
純鹼	0.5 ~ 2.0 g/l
浴比	1: 10 ~ 1 : 30
處理條件	50 ~ 80°C × 20 ~ 30 分鐘， 徹底洗去殘留的界面活性劑和鹼劑。

3.3.2 連續式精練

非離子界面活性劑	0.5 ~ 2.0 g/l
純鹼	0.5 ~ 3.0 g/l
處理條件	50 ~ 80°C × 20 ~ 240 秒
以溫水和冷水洗。	
化學藥劑加入水洗機台的前面兩槽，其它槽織物僅以冷水洗	


4. 染色方法

4.1 染色 pH 值

染料類型	最適 pH 值		
	淺色	中色	深色
Everacid A	5.5 ~ 6.5	5.0 ~ 6.0	-
Everacid N	5.0 ~ 6.0	4.5 ~ 5.5	4.0 ~ 5.0
Everacid S	5.0 ~ 6.0	4.5 ~ 5.5	4.0 ~ 5.0
Everacid X	-	4.5 ~ 5.5	4.5 ~ 5.5
Everset M	-	4.5 ~ 5.5	4.5 ~ 5.5
Everset PA	-	5.5 ~ 6.5	5.0 ~ 6.0

- 起始 pH 值，可使用醋酸與醋酸鈉設定。


4.2 繩狀、經軸、筒子紗染色 (Nylon)

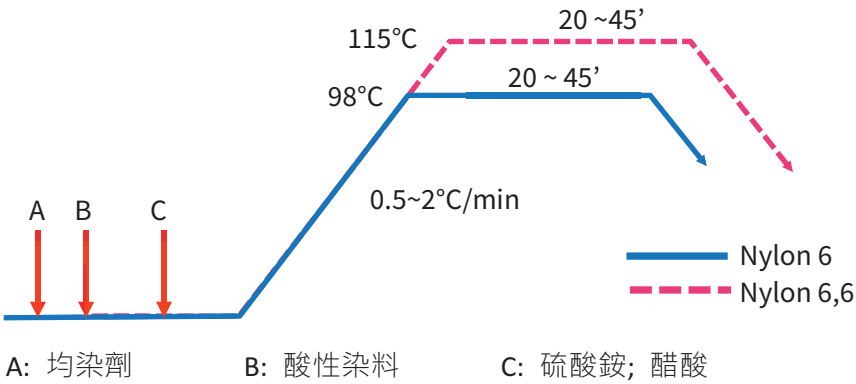

4.3 吉革染色


建議：

- 助劑以 1/2 比例分 2 回加入吉革染機：
均染劑: 1 ~ 3 g/l
硫酸銨搭配醋酸調整 pH 值
- 酸性染料以 1/2 比例分 2 回加入吉革機
- 昇溫至 80°C 運轉 2 回
- 昇溫至 98°C 運轉 4 ~ 8 回或至少 60 分鐘

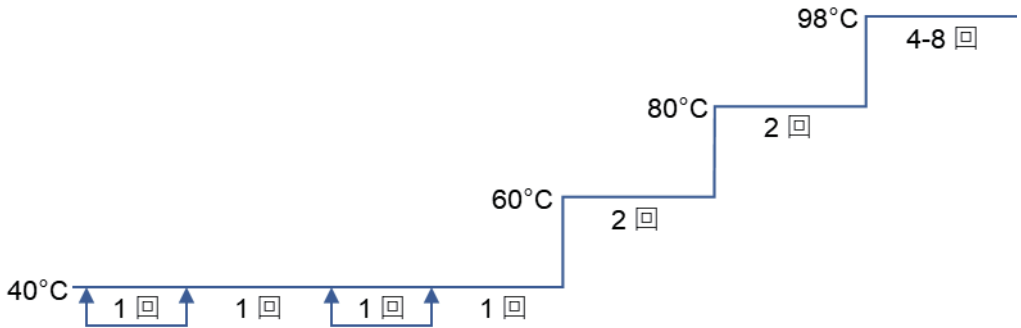

4.4 一浴壓染蒸處工程

此方法為採一浴溼式蒸汽固著的染色方式，特別適合於尼龍窄幅織物的染色應用。

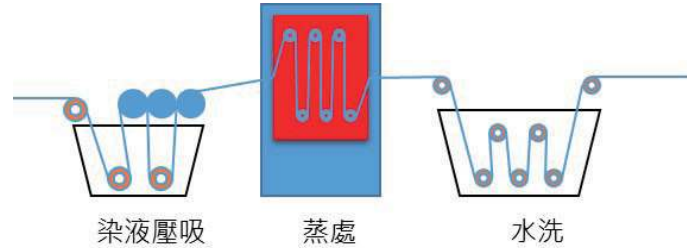

- 染色壓吸液組成：

Everacid 染料	x g/l
醋酸	y g/l
酸性均染劑	1~2 g/l (選擇性使用)
滲透劑	1~2 g/l
蒸處：	飽和蒸氣 102~105°C×3~5 分鐘。
- 壓吸液溫度需保持恆定
- 助劑的選用應注意是否適合於壓吸液，並且是非起泡性。

5. 改善染色物溼潤堅牢度的後處理加工

為了改善溼潤堅牢度，特別是深色和以陽離子柔軟劑或抗靜電劑處理過之織物，必須再經過後處理加工。

有一部分的酸性染料染尼龍的溼潤堅牢度不佳，可以使用適當的酸性固色劑處理，可以獲得滿意的改善。

5.1 使用合成固色劑固色

合成固色劑	1 ~ 2 % (o.w.f)
pH 調整值	4.0 ~ 5.0
處理條件	70 ~ 80°C × 30 分鐘

部分合成固色劑對高濃度的酸很敏感，所以稀釋時要特別留意。固色處理後所提高的溼潤堅牢度效果可能會被熱破壞，特別是蒸處處理破壞，因此，選擇較高溼潤堅牢度的染料是更重要的。

6. 異常染色的重修

6.1 剝除固色劑

純鹼	3 ~ 5 g/l
非離子界面活性劑	1 ~ 2 g/l
處理條件	98°C × 60 分鐘

6.2 部分剝色與重修

不均染或不對色可以使用部份剝色來改善，其方法如下所示：

親染料型均染劑	1 ~ 4 g/l
純鹼調整 pH 8~10	x g/l
處理條件	98°C × 30 ~ 60 分鐘

然後將染液降溫至 70°C 再加染料和酸，於同一染浴中繼續染色，或排液再以新染浴修色。

6.3 剝色

如果上述部份剝色無法達到足夠的改善效果，則以氧化法或還原法處理。預先試驗可以決定何種方法效果最好。

6.3.1 鹼處理

純鹼	5.0 %
酸性均染劑(陰/非)	2.0 %
處理條件	90°C × 30 min
處理完成後冷水洗淨	

6.3.2 氧化剝色

亞氯酸鈉	2~4%
草酸	1~2%
處理條件	95°C × 30 min
處理完成後使用 2~4% 硫代硫酸鈉去除殘留的有效氯 50°C 處理 20 min。之後使用清水沖洗乾淨。	

6.3.3 還原剝色

保險粉($\text{Na}_2\text{S}_2\text{O}_4$)	5 %
純鹼	5 %
處理條件	90°C × 30 min
處理完成後冷水洗淨	

7. 色卡特性說明

7.1 染色特性

7.1.1 固著曲線

酸性染料於 1/1N 染尼龍織物，其染色過程中，染料的上色與時間溫度的關係。

染色條件:

被 染 物: 尼龍針織布
染料濃度: 一般色定為 1/1N，黑色為 DK
浴 比: 1:10
p H 值 5.0 (buffer)

7.1.2 染深性

測定酸性染料，在染料濃度與上色力度的關係

染色條件:

被 染 物: 尼龍針織布
浴 比: 1:10
p H 值 5.0

7.1.3 pH 依存性

測定酸性染料，在不同 pH 值的染色條件下，色相力度變異

染色條件:

被 染 物: 尼龍針織布
染料濃度: 一般色定為 1/1N，黑色為 DK
浴 比: 1:10
p H 值 以 Buffer 調整 pH 值變動

7.1.4 瞬染性

瞬染性即染色初期染料的吸盡率，即 1/1N 染料在尼龍 6 織物在 60°C 與最終上色率的比值。(pH 5 buffer)

判定:

0 ~ 20 %	非常小
21 ~ 40 %	小
40 ~ 60 %	中
61 ~ 80 %	中~大
80 ~ 100 %	大

7.1.5 移染性

測定 1/1 N 酸性染料在未加均染劑條件下，已染色尼龍 6 織物上的染料遷移至未染色尼龍 6 空白織物上的比例 (pH 5)

判定:

0 ~ 20 %	極差
21 ~ 40 %	差
40 ~ 60 %	中
61 ~ 80 %	佳
80 ~ 100 %	極佳

7.1.6 橫條遮蓋性

測定 1/1 N 酸性染料在未加均染劑的條件下，施染於具有橫條的試驗織物，再以 ISO 灰色標比較結果

(pH 5 buffer; 98°C × 60 min)

判定:

5	極佳
4 ~ 4-5	佳
3 ~ 3-4	中
2 ~ 2-3	差
1 ~ 1-2	極差

7.1.7 尼龍 / 羊毛混紡織物兩種纖維之相對染料分配性

尼龍與羊毛之間的染料分配差異，主要取決於纖維品質、纖維比率和施染染浴。

測定 1/1 N 酸性染料在未加均染劑的條件下(pH 5)，施染於同浴中相同重量的羊毛及尼龍。

比較尼龍和羊毛之間的分配率。

7.2 一般特性

7.2.1 90°C 溶解度

溶解度: 溶解於 1 升蒸餾水(軟水)的染料量。
測試條件如下：
定量的染料以一部份的 200ml 冷水於燒杯內溶解成漿狀，再將其餘水加入燒杯中稀釋。
將裝染料溶液的燒杯放入 90 ± 2°C 之熱浴中，並且於此溫度下以 500 ~ 600rpm 速率攪拌，加熱至染料溶液溫度達 90°C 持續攪拌 5 分鐘，然後以濾紙真空過濾。根據過濾所得之殘渣多少，判定染料的溶解度。

7.2.2 溶液穩定性(90°C → 25°C)

依照 6.2.1 準備染料溶液，然後由 90°C 自然冷卻至 25°C。
然後以濾紙真空過濾。根據過濾所得之殘渣多少，判定染料的溶解穩定性。

7.2.3 色恆性

以標準光源(D65)作基準，比較在鎢絲燈(Incandescent)和超效能日光燈(TL-84)照射下，說明色調變化傾向：
Y：黃色調 R：紅色調 B：藍色調 G：綠色調

7.2.4 金屬離子影響

染浴中加入金屬離子而後染色，評估金屬離子對染色物色相的影響。
鐵離子: 一般染色程序中加入 20ppm 氯化亞鐵
銅離子: 一般染色程序中加入 20ppm 硫酸銅
判定：根據 AATCC 的變褪色灰色標來判定，添加金屬離子的染色物色相和未加金屬離子的染色物之間色相差異程度。

7.2.5 多種纖維沾染

一般染色程序中加入 ISO 6 種纖維布於同浴中染色。染色結束後以灰色標測定污染等級。

7.2.6 拔染性

拔染性由於底色的濃度和拔白處方的不同而效果不同。染色後用下述二種處方進行拔染性試驗。

(1) 拔染糊處方：1/1N (單位: g)

	中性	鹼性	Decrolin
拔染劑 (Rongalit C)	200	200	—
拔染劑 (Decrolin)	—	—	100
純鹼	—	50	—
吸溼劑	40	40	40
糊劑	X	X	X
水	Y	Y	Y
全量	1000	1000	1000

(2) 工程: 印花→ 80°C 烘乾 → 102°C × 10 分鐘

(3) 判定: 以 ISO 沾色灰色標判定級數

7.3 染色堅牢度的試驗方法

(1) 耐水洗	AATCC TM61-2A ISO 105 C10 B ISO 105 C10 C ISO 105 C06 B2S
(2) 耐水	ISO 105 E01
(3) 耐海水	ISO 105 E02
(4) 耐汗(酸、鹼)	ISO 105 E04
(5) 耐氯水	ISO 105 E03
(6) 耐唾液	DIN53160
(7) 色泣牢度	大丸法
(8) 氣體變褪色	ISO 105 G01
(9) 耐摩擦	ISO 105 X12
(10) 耐熱壓	ISO 105 X11
(11) 日光牢度	AATCC TM16.3-3 ISO 105 B02
(12) 汗日光牢度	AATCC TM125 ISO 105 B07

8. 染料三原色選擇

Everacid 三原色推薦

淺色

Everacid Yellow A-4R
Everacid Red A-2BN
Everacid Blue A-RL

中色

Everacid Yellow N-3R
Everacid Red N-2BL
Everacid Blue N-RL

深色

Everacid Orange N-GTL
Everacid Rubine N-5BL
Everacid Cyanine N-5R

Everacid S

主要應用於鮮豔色系，有別於傳統三原色的概念，建議選取主色後再搭配其他染料進行調色

Everset 三原色推薦

Everset M 系列

Everset Yellow M-2R
Everset Red M-G
Everset Grey M-G

輔助色

Everset Bordeaux M-B
Everset Blue M-2R

Everset PA 系列

Everset Yellow PA
Everset Red PA
Everset Blue PA

輔助色

Everset Yellow PA-2G
Everset Bordeaux PA
Everset Navy PA

Everacid X 系列

Everacid Yellow X-BW
Everacid Red X-BW
Everacid Blue X-BW

輔助色

Everacid Bordeaux X-BW
Everacid Brown X-BW

EVERACID / EVERSET DYES

English Version

Better Chemistry Better Life

Brand Promise

Through the passionate pursuit of progress and innovation, Everlight Chemical contributes to the successes of our customers. Our work helps create a better community and ensure a sustainable future. We believe that the intelligent application of chemistry can help make the world a better place.

Brand Values

Everlight Chemical believes that the intelligent application of chemistry can help make the world a better place. Everlight Chemical has earned recognition by customers and stakeholders for the following brand values:

Reliability

Everlight Chemical's brand trustworthiness is built upon a core value of integrity, determination to deliver on promises, stable product quality, and attentive service.

Client-Centric

Customer Caring with Value Creation is Everlight Chemical's Quality Policy. Our mission is to help clients achieve success through our high-quality products, innovative solutions, and technical support.

Innovation

Focusing on our core competency-Chemistry, Everlight Chemical highly values R&D that leads to breakthroughs and progress in developing chemical products that benefit humanity.

Welfare

Contribution to the welfare of society is high among Everlight Chemical's priorities. We hope our work can contribute to a brighter future for all of mankind.

CONTENT

1. Introduction	A-28
2. Classification of Everacid / Everset Dyes.....	A-28
2.1 Everacid A Range	A-29
2.2 Everacid N Range.....	A-29
2.3 Everacid S Range	A-29
2.4 Everset M Range.....	A-30
2.5 Everset PA Range.....	A-30
2.6 Everacid X Range	A-30
2.7 Classification Diagram of Everacid / Everset Dyes.....	A-31
3. Pretreatment	A-31
3.1 Presetting	A-31
3.2 Post-setting	A-32
3.3 Scouring.....	A-32
4. Dyeing Method	A-33
4.1 Dyeing PH adjust	A-33
4.2 Fabric / Yarn / Beam(Nylon)	A-33
4.3 Jigger	A-34
4.4 Pad-Steam process	A-34
5. After Treatment to Improve Wet Fastness	A-35
5.1 Use of Synthetic Fixing Agent for Aftertreatment.....	A-35
6. Correction of Faulty Dyeing.....	A-35
6.1 Stripping of Fixing Agent	A-35
6.2 Partial Stripping and Levelling Out	A-35
6.3 Color Stripping.....	A-36
7. Property Explanation on The Pattern Section	A-37
7.1 Dyeing Property.....	A-37
7.2 General Property	A-39
7.3 Test Method for Fastness.....	A-41
8. Dyes selection	A-42

Dye Information Index Page

Dyes	page	Dyes	page
Everacid A Type		Everacid Red S-BL	65
Everacid Yellow A-FG	1	Everacid Rhodamine S-BN	67
Everacid Yellow A-4R	3	Everacid Violet S-RWN	69
Everacid Red A-2BN	5	Everacid Blue S-BLW	71
Everacid Bordeaux A-RL	7	Everacid Blue S-2R	73
Everacid Blue A-RRL	9	Everacid Turq. S-5G	75
Everacid Blue A-RL	11	Everacid Green S-6G	77
Everacid N Type		Everset M Type	
Everacid Yellow N-5GW	13	Everset Yellow M-2R	79
Everacid Yellow N-MR	15	Everset Red M-G	81
Everacid Yellow N-3RL	17	Everset Bordeaux M-B	83
Everacid Yellow N-3R	19	Everset Brown M-B	85
Everacid Orange N-G	21	Everset Blue M-2R	87
Everacid Orange N-GTL	23	Everset Navy M-R	89
Everacid Red N-B	25	Everset Grey M-G	91
Everacid Red N-2BL	27	Everset Black M-B	93
Everacid Red Brown N-V	29	Everset PA Type	
Everacid Rubine N-5BL	31	Everset Yellow PA-4G	95
Everacid Turq. Blue N-GRL	33	Everset Yellow PA-2G	97
Everacid Blue N-AFN	35	Everset Yellow PA	99
Everacid Blue N-RL	37	Everset Orange PA-2R	101
Everacid Cyanine N-5R	39	Everset Red PA-3G	103
Everacid Dark Green N-A	41	Everset Red PA	105
Everacid Blue Black N-10B	43	Everset Red PA-4B	107
Everacid Black LDN	45	Everset Bordeaux PA	109
Everacid Black MR	47	Everset Blue PA-2R	111
Everacid Black LD	49	Everset Blue PA	113
Everacid Black ACE	51	Everset Navy PA	115
Everacid Black S-MF	53	Everset Black PA-R	117
Everacid S Type		Everacid X Type	
Everacid Yellow S-7G	55	Yellow X-BW	119
Everacid Yellow S-4GL	57	Red X-BW	121
Everacid Orange S-GSN	59	Bordeaux X-BW	123
Everacid Red S-GS	61	Brown X-BWE	125
Everacid Red S-3B	63	Blue X-BW	127
		Everacid Black X-BW	129
		Everacid Black X-BWE	131

1. Introduction

Everacid/Everset dyes are mainly designed for polyamide by exhaust, printing, or pad methods. Selected items are suitable for silk or wool substrates dyeing.

This manual booklet provides required information about Everacid / Everset dyes on polyamide fibers in exhaust dyeing process and its blends with other fibers.

Given that various factors, e.g. fiber form, dyeing equipment, depth of shade, pH, dye affinity and auxiliaries, can affect the performance of the acid dyes during processing. The suggested general method should be adjusted to adapting the specific conditions on site.

When selecting combinations of Everacid / Everset dyes, it is necessary to consider such as compatibility at the chosen pH, fastness properties, migration and coverage of barre' characteristics.

2. Classification of Everacid / Everset Dyes

The application of Everacid / Everset dyes are based on dyes structure 、 migration 、 affinity 、 build-up and compatibility as well. Classification shown as below:

- (1) Metal Free Typed Everacid Dyes
 - Everacid A: levelling type
 - Everacid N: half milling type
 - Everacid S: milling type
- (2) 1:2 Metal Complex Typed Everset / Everacid X Dyes
 - Everset M: targeting for wool dyeing
 - Everset PA: targeting for polyamide dyeing
 - Everacid X: eco-friendly & unique build-up acid dyes

2.1 Everacid A Type

Everacid A type dyes feature levelling performance in pale shades dyeing along with prominent lightfastness. The following advantages are achieved:

- unique migration and levelness
- unique barre' coverage
- excellent lightfastness
- good wet fastness on pale shade.
- Additional fixing treatment required for medium-dark shades.

2.2 Everacid N Type

Everacid N type dyes are noted as half milling character with wide application & economical use for medium-heavy shades. The following advantages are achieved:

- unique build-up
- moderate-excellent lightfastness
- good wet fastness on medium shades.
- Additional fixing treatment required for dark shades
- moderate-excellent migration
- covering barre' by support of levelling agent
- brilliant and spacious gamut being single use or trichromatic
- metal free dyes(except black dyes)

2.3 Everacid S Type

Everacid S type dyes are noted as milling character with outstanding wet fastness & lightfastness. Thanks to their high chromaticity, these dyes are highly recommended as the dominant shades, while others function as shading components. The following advantages are achieved:

- extremely high chromaticity
- excellent build-up for various substrates polyamide. e.g micro nylon
- excellent lightfastness for dark shades
- unique wet fastness
- excellent compatibility
- metal free dyes

2.4 Everset M Type

Everset M type dyes are noted as 1:2 metal-complex compound with remarkable wet and lightfastness. Suitable for the dyeing of polyamide · silk · wool · and animal hairs as well. Broad gamut and cost-effective orientation. The following advantages are achieved:

- 1:2 metal-complex structure
- excellent build-up for various substrates polyamide & wool
- exclusive lightfastness
- remarkable wet fastness
- moderate migration
- excellent compatibility

2.5 Everset PA Type

Everset PA type dyes are noted as 1:2 metal-complex compound , highly suitable for polyamide / Lycra blends dyeing with excellent compatibility , levelness , and build-up as well. Proper selection of levelling agents will benefit Barre' coverage . Highly suitable for micro polyamide with outstanding lightfastness and washing fastness. The following advantages are achieved:


- 1:2 metal-complex structure
- excellent build-up for various substrates polyamide
- exclusive lightfastness
- remarkable wet fastness
- compatible with Everset M range

2.6 Everacid X Type

Everacid X type dyes are innovative new structure with great savings on recipe cost and tremendous reduction of waste water and less impact to environment. Unparalleled build-up and wet fastness for micro polyamide dyeing. Eco and economical orientation affirmed as breakthrough in polyamide dyeing.

- excellent light fastness in deep shades
- excellent wet fastness in deep shades
- compatible with Everset M/PA range

2.7 Classification Diagram of Everacid / Everset Dyes

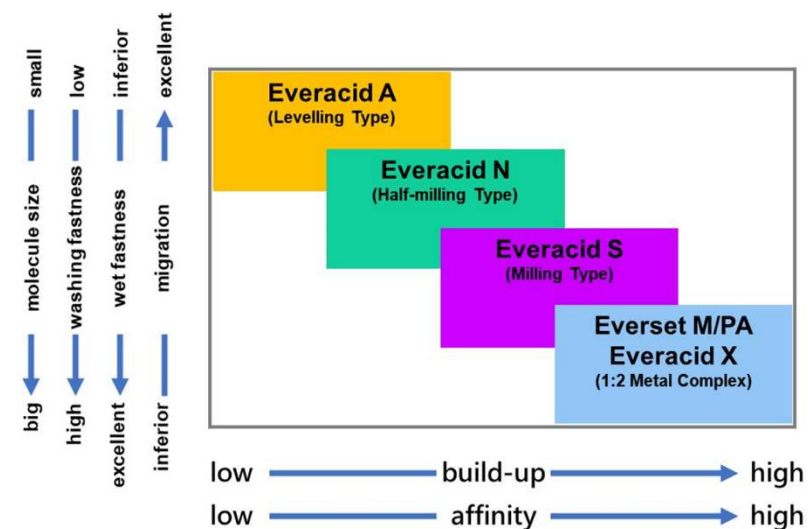

3. Pretreatment

3.1 Presetting

To avoid crease mark , curling edge and excessive shrinkage during nylon polyamide dyeing, the presetting is essential to achieve dimensional stability. It may be necessary to relax fabrics made from stretch or high twist yarns prior to setting. The polyamide woven or knitted goods achieve the desired dimensional stability.

Optimum setting conditions depend on the type of the material and the available machinery. The rapid cooling after presetting will be preferred. General guidelines:

	hot air		saturated steam	
Nylon 6	180~190°C	15~30 sec.	110~120°C	20~30 sec.
Nylon 6.6	200~210°C	15~30 sec.	110~130°C	20~30 sec.

3.2 Post-setting

Heavy woven and knitted polyamide goods may not need presetting. However, the post-setting is needed after dyeing to suit the dimensional stability.

3.3 Scouring

Polyamide goods are normally coated with water-soluble preparations which do not impair the dyeing process. However, scouring is highly recommended when the goods are heat-setting before dyeing.

3.3.1 Discontinuous / batch scouring

Scouring agent 0.5~2.0 g/l
Soda ash 0.5~2.0 g/l
Liquor ratio 1:10~1:30
Condition 50~80°C x 20~30 min.
Thoroughly rinse off the scouring agent and soda ash after processing.

3.3.2 Continuous scouring

Scouring agent 0.5~2.0 g/l
Soda ash 0.5~3.0 g/l
Condition 50~80°C x 20~240 s
The required chemicals added in first two compartments of continuous washing machine with warm to hot water. Cold water recommended for the rinsing off in remaining compartments.


4. Dyeing Method

4.1 Dyeing pH adjust


Dyes	Optimum Dyeing pH		
	Pale Shade	Medium Shade	Dark Shade
Everacid A	5.5 ~ 6.5	5.0 ~ 6.0	-
Everacid N	5.0 ~ 6.0	4.5 ~ 5.5	4.0 ~ 5.0
Everacid S	5.0 ~ 6.0	4.5 ~ 5.5	4.0 ~ 5.0
Everacid X	-	4.5 ~ 5.5	4.5 ~ 5.5
Everset M	-	4.5 ~ 5.5	4.5 ~ 5.5
Everset PA	-	5.5 ~ 6.5	5.0 ~ 6.0

- The below reference of PH setting by blending Acetic Acid & Sodium acetate.

4.2 Fabric / Yarn / Beam(Nylon)

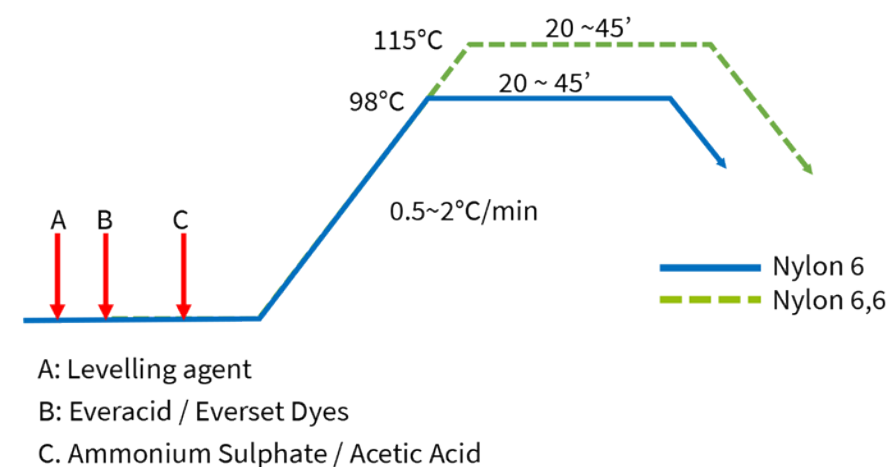

4.3 Jigger

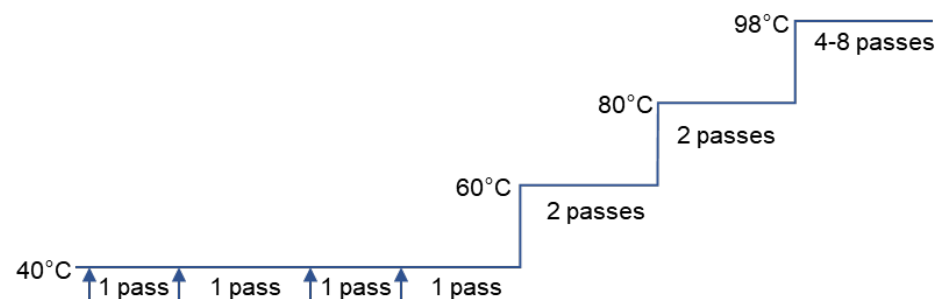


Suggestion:

- Chemicals dosing by 2 times, each half amount
Levelling agent 1~3 g/l
Ammonium sulfate / acetic acid for pH adjustment
- Dyes addition by 2 times, each half amount
- Heating to 60°C. Then 2 pass
- Heating to 80°C. Then 2 pass
- Heating to 98°C. Then 4-8 pass or hold at least 60 min

4.4 Pad-Steam process

This is one-bath continuous dyeing process suitable for nylon narrow fabric.

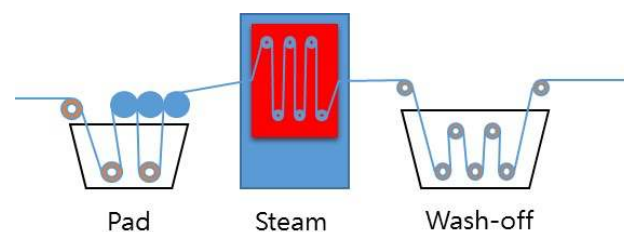

- Padding liquor condition:
Everacid dyes x g/l
Acetic acid y g/l
Acid leveling agent 1~2 g/l (optional)
Penetrating agent 1~2 g/l
Steaming: saturated steam at 102~105°C × 3~5 minute
- Padding liquor temperature must be kept constant.
- The additives must also be stable in the padding liquor and be non-foaming.

5. After Treatment to Improve Wet Fastness

To improve the wet fastness properties by cationic fixing agent, especially in the case of dark shades where wet/washing fastness had been stressed.

Excellent wet and washing fastness can be achieved through fixing treatments, even for dyes with poor inherent fastness.

5.1 Use of Synthetic Fixing Agent for Aftertreatment

Synthetic fixing agent	1~2%
PH adjustment	4.0~5.0
Condition	70~80°C x 30 min

The dilution would be aware for some synthetic fixing agent owing to sensibility of concentrated acid. The improved wet fastness supported by fixing agent could be diminished by heat setting, especially steam. Therefore, the dyeings should not afterwards be fixed with steam.

6. Correction of Faulty Dyeing

6.1 Stripping of Fixing Agent

Soda Ash	3 ~ 5 g/l
Nonionic surfactant	1 ~ 2 g/l
Condition	98°C x 60 min

6.2 Partial Stripping and Levelling Out

Unlevel or off-shade dyeing set a fresh bath to strip partial colors as recommended below:

Dyes-affinity levelling agent	1 ~ 4 g/l
PH adjustment by soda ash	8 ~ 10 g/l
Condition	98°C x 30~60 min

Then cooling bath to 70°C and add dyes and acid for redyeing. If necessary, better drain and redye.

6.3 Color Stripping

If the partial stripping can not be satisfied for the desired improvement, then an oxidative or reductive stripping will be recommended. Trials in lab will be recommended to select proper method to suit the best results prior to bulk.

6.3.1 Alkali Stripping

Soda ash	5 %
Levelling agent	2 %
Condition	90°C x 30 min
Rinse thoroughly and neutralizing afterwards, And rinse thoroughly with water	

6.3.2 Oxidative Stripping

Sodium chlorite	2~4%
Oxalic acid	1~2%
Condition	95°C x 30 min
Rinse thoroughly and dechlorinate with 2~4% sodium bisulphite crystal, 50°C x 20 min. And rinse thoroughly with water	

6.3.3 Reductive Stripping

Hydrosulphite	5%
Soda ash	5%
Condition	90°C x 30 min
Rinse thoroughly and neutralizing afterwards, And rinse thoroughly with water then redye.	

7. Property Explanation on The Pattern Section

7.1 Dyeing Property

7.1.1 Fixation Curve

Based on nylon on 1/1N standard depth. Relation of dyes fixation undergoing with time and heating process.

Condition:

Material: nylon 6 knits

Dyeing depth: 1/1N standard depth for regular dyes,
DK for black dyes

Liquor ratio: 1:10

pH: 5.0(use buffer)

7.1.2 Build-Up

Assessment of the relationship between dye build-up and dyeing depth.

Condition:

Material: nylon 6 knits

Liquor ratio: 1:10

pH: 5.0(use buffer)

7.1.3 PH Dependency

Assessment of shade variation under various pH.

Condition:

Material: nylon 6 knits

Dyeing depth: 1/1N standard depth for regular dyes,
DK for black dyes

Liquor ratio: 1:10

pH: various PH preparation by buffer

7.1.4 Strike

Strike is the relative dyes exhaustion under 60°C under pH5, compared to final exhaustion at boiling.

Assessment:

0~20 %	very small
21~40%	small
41~60%	medium
61~80%	medium-large
81~100%	large

7.1.5 Migration

Measure the difference in color strength between a dyeing depth in 1/1 standard depth of nylon 6 and undyed material of the same type at PH 5 and 98°C after 60 min migration time, without help of levelling agent.

Assessment:

0~20 %	very poor
21~40%	poor
41~60%	medium
61~80%	medium-excellent
81~100%	excellent

7.1.6 Coverage of Barre'

Evaluation was made of dyeing in 1/1 standard depth carried out without help of levelling agent on the barre' inherent fabric, then assess the strip according to the ISO Grey Scale.

(dyeing at PH 5 buffer, 98°C x 60 min)

Assessment:

Rating	5	excellent
Rating	4 ~ 4-5	good
Rating	3 ~ 3-4	medium
Rating	2~ 2-3	poor
Rating	1 ~ 1-2	very poor

7.1.7 Polyamide/Wool Fiber Blends – Relative Dyes Distribution

This dyeing property provides information on the behavior of dyes in combination in regard to substrate quality and blending ratio and dyeing condition.

Evaluation was made of dyeing 1/1 standard depth without help of leveling agent on equal weight polyamide and wool. Assessment the dyes distribution between polyamide and wool.

7.2 General Property

7.2.1 90°C Solubility

The solubility refers to the amount of dyes in grams which dissolves in 1 liter of distilled of soft water (g/l)

Paste the amount of dyes to be tested in a glass beaker with a portion of 200 ml water until it is fully completely moistened and the fill up the rest.

Place the beaker containing the dyes solution on the heating device at 90± 2°C on stirring mixer of 500~600 rpm for 5 min and then suction off through 2 paper filters by vacuum pump.

Assessment the solubility based the residuals of dyes on filter papers.

7.2.2 Solution Stability (90 °C to 25 °C)

After dissolving the dyes at 90°C, place the solution cooled to 25°C and then suction off through 2 filter papers.

7.2.3 Color Consistency

Evaluate the shade change tendency of the dyed material based on D65 standard day lightsource and compared to incandescent light and TL-84 light tendency indication:

Y(Yellowish) **R**(Reddish) **B**(Bluish) **G**(Greenish)

7.2.4 Effect of Metal Ion in Dyebath

Evaluation of the shade change while metal ion had added into the dyebath.

Ferrous ion(Fe^{2+}): 20ppm of FeCl_2 added in dyebath

Copper ion(Cu^{2+}): 20ppm of CuSO_4 added in dyebath

Assessment:

Use the ISO Color Change Grey Scale to gauge the shades difference of dyed good with adding metal ion compared with the original dyed goods.

7.2.5 Multi-fiber Cross Dyeing

Load the SDC standard adjacent multi-fiber with dyes in same bath. Then evaluate the staining grade of each various material by ISO Stain Grey Scale.

7.2.6 Dischargeability

Dischargeability result will be varied from the dyeing depth of materials and discharge formulation. The general discharge paste preparation and process recommended as below:

(1) Paste Formulation(Unit: gram)

	Neutral	Alkaline	Decrolin
Rongalit C	200	200	--
Decrolin	--	--	100
Soda ash	--	50	--
Hydroscopic agent	X	X	X
Thickener	Y	Y	Y
Total	1000	1000	1000

(2) Process :printing →80°C drying →102°C x 10 min steaming

(3) Assessment: Use ISO Stain Grey Scale to evaluate the result.

7.3 Test Method for Fastness

(1) Washing	AATCC TM61-2A ISO 105 C10B ISO 105 C10C ISO 105 C06 B2S
(2) Water	ISO 105 E01
(3) Sea Water	ISO 105 E02
(4) Perspiration(Acid/Alkali)	ISO 105 E04
(5) Chlorinated Water	ISO 105 E03
(6) Saliva	DIN53160
(7) Color Bleeding	Daimaru Standard
(8) Gas Fading	ISO 105 G01
(9) Rubbing	ISO 105 X12
(10) Hot Pressing	ISO 105 X11
(11) Lightfastness	ISO 105 B02 AATCC TM16.3-3
(12) Perspiration Lightfastness	ISO 105 B07 AATCC TM125

8. Dyes selection

Everacid trichromatic dyes

Pale shades

Everacid Yellow A-4R
Everacid Red A-2BN
Everacid Blue A-RL

Medium shades

Everacid Yellow N-3R
Everacid Red N-2BL
Everacid Blue N-RL

Deep shades

Everacid Orange N-GTL
Everacid Rubine N-5BL
Everacid Cyanine N-5R

Everacid S Range is specially designed for brilliant colors for Nylon. It is dominant as single shade dyeing. For certain shades, the shading by Everacid N, S dyes will be combined.

Everset trichromatic dyes

Everset M Range

Everset Yellow M-2R
Everset Red M-G
Everset Grey M-G

Supplementary :

Everset Bordeaux M-B
Everset Blue M-2R

Everset PA Range

Everset Yellow PA
Everset Red PA
Everset Blue PA

Supplementary :

Everset Yellow PA-2G
Everset Bordeaux PA
Everset Navy PA

Everacid X Range

Everacid Yellow X-BW
Everacid Red X-BW
Everacid Blue X-BW

Supplementary shades:

Everacid Bordeaux X-BW
Everacid Brown X-BW

Everacid A Dyes

頁 Page	染料 Dyes	1/12 N 1/1N	染料特性	Characteristics
1	Yellow A-FG		1. 明亮帶綠味的黃色染料 2. 具有極佳的均染性 3. 極佳的橫條遮覆性 4. 高日光牢度	1. Brilliant greenish yellow dyes 2. Excellent levelness 3. Excellent Barré coverage 4. Excellent light fastness
3	Yellow A-4R		1. 淺色系黃色三原色 2. 極佳均染性 3. 對尼龍橫條遮覆性高 4. 淺色日光牢度高	1. Elementary yellow dyes. 2. Excellent levelness. 3. Excellent Barré coverage 4. Excellent light fastness
5	Red A-2BN		1. 淺色紅色三原色選擇 2. 極佳均染性 3. 對尼龍橫條遮覆性高 4. 淺色日光牢度高	1. Elementary Red dyes. 2. Excellent levelness. 3. Excellent Barré coverage 4. Excellent light fastnes
7	Bordeaux A-RL		1. 淺色系中唯一酒紅色輔助色 2. 極佳淺色日光牢度及耐氯水牢度	1. Supplementary bordeaux dyes 2. Excellent lightfastness & Chlorinated water fastness
9	Blue A-RRL		1. 明亮帶紅味的藍色染料 2. 具有極佳的均染性，特別適合亮藍色的基色 3. 推薦用於尼龍印花	1. Brilliant, reddish Blue 2. Suitable for a fundamental color for brilliant blue, especially for level dyeing 3. Recommended for nylon printing
11	Blue A-RL		1. 淺色藍色三原色 2. 極佳均染性 3. 對尼龍橫條遮覆性高 4. 淺色日光牢度高	1. Elementary Blue dyes. 2. Excellent levelness. 3. Excellent Barré coverage 4. Excellent light fastness.

Everacid N Dyes

頁 Page	染料 Dyes	1/12 N 1/1N	染料特性	Characteristics
13	Yellow N-5GW		1. 可用於混紡 織物，對其他纖維沾染程度低 2. 日光及濕牢度優異 3. 可用於尼龍印花	1. Suitable for dyeing of blends because of small staining on other fiber. 2. Good fastness to light and wetting 3. Suitable for printing of Nylon.
15	Yellow N-MR		1. 鮮明亮黃色，極佳橫條遮蓋性 2. 作為普通三原色輔助色染料 3. 日光和濕潤堅牢度佳	1. Brilliant golden yellow, good Barré coverage. 2. Elementary thrichromatic 3. Excellent lightfastness & wet fastness
17	Yellow N-3RL		1. 溶解度佳，適合印花加工 2. 極佳的濕潤與日光牢度 3. 均染性佳	1. Excellent solubility for printing 2. Excellent lightfastness & wet fastness 3. Outstanding levelness.
19	Yellow N-3R		1. 中色系黃色三原色 2. 與R-N2BL/B-NRL配色使用可得廣色域的顏色 3. 易拔白，適合拔白底色染色 4. 溶解度佳，適合印花加工	1. Trichromatic for medium shade. 2. Compatible with R-N2BL / B-NRL 3. Dischargeble 4. Excellent solubility for printing
21	Orange N-G		1. 明亮、高色值的橘色 2. 極佳的濕潤堅牢度	1. Brilliant & high color-yield 2. Excellent wet fastness
23	Orange N-GTL		1. 極高色值、高染深的棕味橘色 2. 深色三原色的黃色主色 3. 與Rubine N-5BL/Cyanine N-5R搭配可染極深 色	1. High build- up. 2. Trichromatic for deep shades 3. Compatible with Rubine N-5BL & Cyanine N-5R
25	Red N-B		1. 非常明亮帶 藍味的桃紅色 2. 耐氯堅牢度佳 3. 溶解度佳，適合印花加工	1. Brilliant bluish red dyestuff. 2. Excellent chlorinated water fastness. 3. High solubility for printing.
27	Red N-2BL		1. 中色系紅色三原色 2. 與Y-N3R/ B-NRL配色使用可得廣色域的顏色 3. 拔白性佳	1. Trichromatic for medium shades. 2. Compatible with Y-N3R / B-NRL 3. Dischargeable
29	Red Brown N-V		1. 各項堅牢度佳 2. 適合深紅棕色染色	1. Good fastness 2. Suitable for deep red brown

Everacid N Dyes

頁 Page	染料 Dyes	1/12 N 1/1N	染料特性	Characteristics
31	Rubine N-5BL		1. 極高色值、高染深的紅寶石色 2. 深色三原色的紅色主色 3. 與Orange N-GTL / Cyanine N-5R 搭配可染極深色	1. High build-up & color yield 2. Trichromatic for deep shades 3. Compatible with Orange N-GTL & Cyanine N-5R
33	Turquoise Blue N-GRL		1. 基本經濟的翠藍色 2. 極佳的染深性	1. Elementary & economic turquoise 2. Excellent build-up.
35	Blue N-AFN		1. 染深性佳 2. 淺色也有極佳的日光牢度	1. Excellent build-up. 2. High light fastness.
37	Blue N-RL		1. 中色系藍色三原色 2. 與Y-N3R/ R-N2BL 配色使用可得廣色域的顏色 3. 染深性佳 4. 淺色也有極佳的日光牢度	1. Trichromatic for medium shades. 2. Compatible with Y-N3R / R-N2BL 3. High light fastness.
39	Cyanine N-5R		1. 極高色值、高染深的丈青色 2. 深色三原色的藍色主色 3. 與Orange N-GTL / Rubine N-5BL 搭配可染極深色	1. High color yield & build-up 2. Trichromatic for deep shades 3. Compatible with Orange N-GTL & Rubine N-5BL
41	Dark Green N-A		1. 帶黃味的綠色染料 2. 均染性佳 3. 拔染性佳	1. Yellowish Green dyes 2. Good leveling property 3. Good dischargeability
43	Blue Black N-10B		1. 帶綠味的藍色染料 2. 均染性佳 3. 拔染性佳	1. Greenish Blue dyes. 2. Good leveling property 3. Good dischargeability

Everacid Black Dyes

頁 Page	染料 Dyes	B/LK B/DK	染料特性	Characteristics
45	Black LDN		1. 基本且經濟的黑色 2. 濕潤及日光 堅牢度佳 3. 極佳的溶解度，適合印花加工	1. Elementary & economic black 2. Excellent wet & lightfastness 3. High solubility for printing
47	Black MR		1. 基本且經濟的黑色 2. 濕潤及日光 堅牢度佳 3. 極佳的溶解度，適合印花加工	1. Elementary & economic black 2. Excellent wet & lightfastness 3. High solubility for printing
49	Black LD		1. 基本且經濟的黑色 2. 濕潤及日光 堅牢度佳 3. 極佳的溶解度，適合印花加工	1. Elementary & economic black 2. Excellent wet & lightfastness 3. High solubility for printing
51	Black ACE		1. 帶綠光黑色染料 2. 極佳的日光及濕潤堅牢度 3. 對彈性纖維沾汙小	1. Greenish black dyes 2. Excellent wet & lightfastness 3. Less cross-staining on elastane fiber
53	Black S-MF		1. 非含金的黑色染料 2. 極佳的日光及汗日光牢度	1. Non-metallized black dye 2. Excellent lightfastness & perspiration lightfastness

Everacid S Dyes

頁 Page	染料 Dyes	1/12 N 1/1N	染料特性	Characteristics
55	Yellow S-7G		1. 明亮螢光黃酸性染料 2. 與Rhodamine S-BN配合，用於從橙色到紅色的各種螢光色 3. Everacid Turq. S-5G 可配成亮綠色	1. Fluorescent yellow dyes 2. Compatible with Rhodamine S-BN for neon orange to red colors 3. Compatible with Turquoise S-5G for brilliant green color
57	Yellow S-4GL		1. 明亮的檸檬黃色染料 2. 具有極佳的染色堅牢度 3. 與 Turq. S-5G 可配成亮綠色 4. 適合拔染	1. Brilliant lemon yellow dyes 2. Excellent fastness performance 3. Compatible with Turquoise S-5G for brilliant green color 4. Suitable for dischaegeability
59	Orange S-GSN		1. 鮮豔明亮的橙色 2. 優異的日光牢度 3. 極佳的濕牢度	1. Brilliant orange dyes 2. Excellent lightfastness 3. Excellent wet fastness
61	Red S-GS		1. 鮮明的紅色染料 2. 具極佳的濕牢度 3. 特別適用於大紅色染色	1. Brilliant red dyes 2. Excellent wet fastness 3. Suitable for deep red color
63	Red S-3B		1. 明亮鮮豔的藍味紅色染料 2. 極佳的耐氫水牢度	1. Brilliant bluish red dyes 2. Excellent chlorinated water fastness
65	Red S-BL		1. 高濕牢度紅色酸性染料 2. 極佳的日光牢度及汗日光牢度	1. Unique wet fastness 2. Excellent lightfastness & perspiration lightfastness
67	Rhodamine S-BN		1. 非常明亮的螢光藍紅色 2. 與Everacid Yellow S-7配合，可用於從橙色到紅色的各種螢光明亮色	1. Very brilliant, blueish red with fluorescence 2. Suitable for a wide variety of brilliant shades from orange to red in combination with Y-S7G
69	Violet S-RWN		1. 鮮豔紫色酸性染料 2. 優異的濕牢度 3. 極佳的日光牢度及汗日光牢度	1. Brilliant violet dyes 2. Excellent wet fastness 3. Excellent lightfastness & perspiration lightfastness
71	Blue S-BLW		1. 綠光的寶藍色染料 2. 染深性佳 3. 良好的橫條遮覆性 4. 極佳的日光及汗日光牢度	1. Greenish royal blue dyes 2. Excellent build-up 3. Good Barré coverage 4. Excellent lightfastness & perspiration lightfastness
73	Blue S-2R		1. 紅光的寶藍色染料 2. 優異的濕牢度 3. 優異的日光及汗日光牢度	1. Reddish royal blue dyes 2. Excellent wet fastness 3. Excellent lightfastness & perspiration lightfastness
75	Turquoise S-5G		1. 鮮豔翠藍色染料 2. 適合豔綠色、湖綠色配色組合	1. Brilliant turquoise blue dyes 2. Suitable for brilliant green and lake green colors
77	Green S-6G		1. 鮮豔綠色酸性染料 2. 極佳的濕牢度 3. 極佳的日光及汗日光牢度	1. Brilliant Green dyes 2. Excellent wet fastness 3. Excellent lightfastness & perspiration lightfastness

Everset M Dyes

頁 Page	染料 Dyes	1/12 N 1/1N	染料特性	Characteristics
79	Yellow M-2R		1. 經濟基礎三原色黃色染料 2. 與Red M-G & Grey M-G有極佳組合性 3. 極佳的日光牢度與濕牢度	1. Elementary & economical yellow 2. Compatible with Red M-G & Grey M-G 3. Excellent lightfastness & wet fastness
81	Red M-G		1. 經濟基礎三原色暗紅色染料 2. 與Yellow M-2R、Grey M-G 有極佳的組合性。 3. 極佳的日光牢度與濕牢度 4. 染深性優異	1. Elementary red for dark red 2. Compatible with Yellow M-2G, Grey M-G 3. Excellent lightfastness & wet fastness 4. Excellent build-up
83	Bordeaux M-B		1. 酒紅色酸性染料 2. 適合酒紅、磚紅、巧克力色的配色	1. Bordeaux & burgundy shade 2. Suitable for Bordeaux & scarlet & chocolate shades
85	Brown M-B		1. 經濟型棕色染料 2. 適合中至深棕色使用	1. Cost effective brown dyes 2. Suitable for medium and dark brown shades
87	Blue M-2R		1. 明亮的寶藍色染料 2. 適用鮮豔皇家藍色 3. 日光牢度及高濕牢度	1. Brilliant royal blue dyes 2. Suitable for royal blue color 3. Excellent lightfastness & wet fastness
89	Navy M-R		1. 明亮的丈青色 2. 適用於中至深丈青色的基色 3. 極佳的日光牢度與濕牢度	1. Brilliant navy blue 2. Basis for medium to dark navy shades 3. Excellent lightfastness & wet fastness
91	Grey M-G		1. 經濟基礎三原色藍灰色染料 2. 與Yellow M-2R、Red M-G有極佳的組合性 3. 極佳的日光牢度與濕牢度	1. Elementary bluish grey dyes 2. Compatible with Yellow M-2R & Red M-G 3. Excellent lightfastness & wet fastness

Everset Black Dyes

頁 Page	染料 Dyes	B/LK B/DK	染料特性	Characteristics
93	Black M-B		1. 中性黑色酸性染料 2. 高染深高&均染高牢度	1. Neutral tone acid black dyes 2. Excellent build-up & levelness
117	Black PA-R		1. 基本且經濟的黑色 2. 濕牢度及日光堅牢度佳 3. 極佳的溶解度，適合印花加工	1. Elementary & economical black 2. Excellent lightfastness & wet fastness 3. Excellent solubility for printing

Everset PA Dyes

頁 Page	染料 Dyes	1/12 N 1/1N	染料特性	Characteristics
95	Yellow PA-4G		1. 明亮的檸檬黃色染料 2. 具有極佳的染色堅牢度 3. 與Everacid Turq. S-5G 可配成亮綠色	1. Brilliant lemon yellow dyes 2. Excellent fastness performance 3. Compatible with Turquoise S-5G for brilliant green color
97	Yellow PA-2G		1. 適用於以黃色為主的深色 2. 具優異的日光牢度與濕牢度 3. 適合尼龍直接印花 4. 優異染深色	1. Suitable for yellow basic color 2. Excellent lightfastness & wet fastness 3. Suitable for Nylon printing 4. Excellent build-up
99	Yellow PA		1. 經濟三原色的黃色染料 2. 與Red PA/ Blue PA配色使用可得廣色域的顏色 3. 極佳的組合性，染深性佳	1. Economical yellow dyes 2. Compatible with Red PA & Blue PA for wide gamut 3. Excellent compatibility & build-up
101	Orange PA-2R		1. 高日光牢度的亮橘色 2. 適用單色及大紅色配色	1. High lightfastness 2. Suitable for single use and deep red color
103	Red PA-3G		1. 明亮的橘紅色染料 2. 優異的日光牢度	1. Brilliant orange dyes 2. Excellent lightfastness
105	Red PA		1. 經濟三原色的紅色染料 2. 與Yellow PA/ Blue PA配色使用可得廣色域的顏色 3. 優異的組合性	1. Economical red dyes 2. Compatible with Yellow PA & Blue PA for wide gamut 3. Excellent compatibility
107	Red PA-4B		1. 明亮的藍味紅色染料 2. 優異的日光牢度及汗日光牢度	1. Brilliant bluish red dyes 2. Excellent lightfastness & wet fastness
109	Bordeaux PA		1. 染深性極佳的酒紅色染料 2. 極佳的日光牢度與濕牢度 3. 與Yellow PA-2G/ Navy PA配色使用可得極深色域的顏色	1. Excellent build-up bordeaux dyes 2. Excellent lightfastness & wet fastness 3. Compatible with Yellow PA-2G & Navy PA for wild gamut
111	Blue PA-2R		1. 適用於鮮豔寶藍色染色 2. 極佳的日光牢度及濕牢度 3. 適用於印花	1. Brilliant royal blue color 2. Excellent lightfastness & wet fastness 3. Suitable for printing
113	Blue PA		1. 經濟三原色藍色染料 2. 與Y-PA/ R-PA配色色域廣 3. 具良好的橫條遮覆性 4. 優異的濕牢度性能	1. Economical blue dyes 2. Compatible with Yellow PA & Blue PA for wide gamut 3. Good Barré coverage 4. Excellent wet fastness
115	Navy PA		1. 經濟型丈青色染料 2. 優異的日光牢度及濕牢度 3. 適用於及深色的丈青色與黑色配色	1. Economical navy dyes 2. Excellent lightfastness & wet fastness 3. Suitable for deep navy and black colors

Everacid X Dyes

Note

頁 Page	染料 Dyes	B/LK	B/DK	染料特性	Characteristics
119	Yellow X-BW			1. 環保三原色的黃色基準染料 2. 與 Red X-BW / Blue X-BW 配色使用可展現廣色域 3. 針對超細纖維具備極佳染深性與低廢水殘留	1. Eco-friendly yellow primary dye 2. Wide color gamut with Red / Blue X-BW 3. Excellent build-up on microfibers, low wastewater residue
121	Red X-BW			1. 環保三原色的紅色基準染料 2. 與 Yellow X-BW / Blue X-BW 配色使用可展現廣色域 3. 針對超細纖維具備極佳染深性與低廢水殘留	1. Eco-friendly red primary dye 2. Wide color gamut with Yellow / Blue X-BW 3. Excellent build-up on microfibers, low wastewater residue
123	Bordeaux X-BW			1. 染深效果極佳的酒紅色染料 2. 針對超細纖維具備優異染深性與低廢水殘留 3. 擁有卓越的日光牢度與濕牢度	1. Deep shade bordeaux dye 2. Excellent build-up on microfibers, low wastewater residue 3. Excellent light and wet fastness
125	Brown X-BW			1. 針對超細纖維具備優異染深性與低廢水殘留 2. 具備極佳的日光牢度與濕牢度表現 3. 專為深棕色調需求設計	1. Excellent build-up on microfibers, low wastewater residue 2. Excellent light & wet fastness 3. Suitable for deep brown shades
127	Blue X X-BW			1. 環保三原色的藍色基準染料 2. 與 Yellow X-BW / Red X-BW 配色使用可展現廣色域 3. 針對超細纖維具備極佳染深性與低廢水殘留	1. Eco-friendly blue primary dye 2. Wide color gamut with Yellow / Red X-BW 3. Excellent build-up on microfibers, low wastewater residue
129	Black X-BW			1. 尼龍超細纖維環保染深染料 2. 有極佳染深效果 3. 染色廢水極少 4. 極佳的牢度性質	1. Eco friendly & environmental-friendly for micro Nylon dyeing 2. Unique build-up 3. Very less dyeing residual 4. Excellent fastness
131	Black X-BWE			1. 尼龍超細纖維環保染深染料 2. 有極佳染深效果 3. 染色廢水極少 4. 極佳的牢度性質	1. Eco friendly & environmental-friendly for micro Nylon dyeing 2. Unique build-up 3. Very less dyeing residual 4. Excellent fastness


Everacid Yellow A-FG

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.1%	0.2%	0.4%	0.8%	1.6%


Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Excellent 極佳
Coverage of barré 橫條遮蓋性		Excellent 極佳
Suitability for wool dye 羊毛適染性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon>>Wool 尼龍>>羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	100 g/l
	90°C→25°C	30 g/l
Color constancy 色恆性	Tungsten lamp	G (B)
	TL84 lamp	G (Y)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4
	Cu ²⁺ 銅	1
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1-2
	Acetate 醋酸纖維	4
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	3-4
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	3
	Alkaline	3
	Neutral	3
Stripping 脫色性	Oxidation	4-5
	Reduction	3


固著曲線 Fixation (All-in)

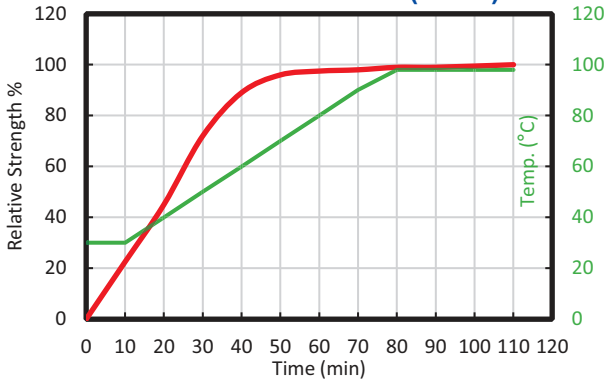

染深性 (Build up)

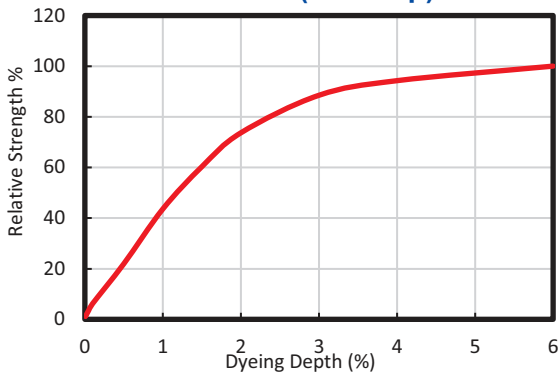

pH依存性 Dependency on pH

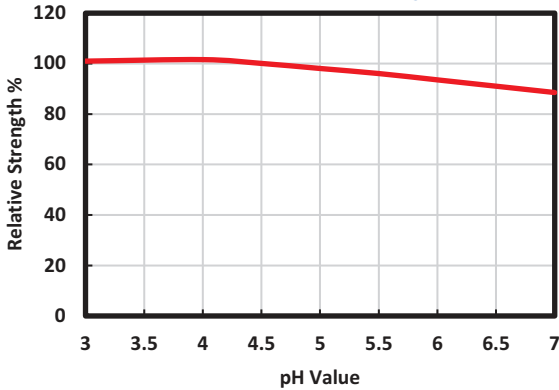

Everacid Yellow A-FG

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4	5	5	4	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4	4-5	4-5	2-3	5	5	3-4		50ppm		2
	ISO 105 C10C	1/1N	2-3	3	4-5	2	5	5	2-3		100ppm		1
	ISO 105 C06 B2S	1/1N	4	4-5	5	3-4	5	5	4-5	Saliva 耐唾液	1/1N	4-5	
Water 耐水		1/1N	5	5	5	2-3	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	5	3-4	4	2	4	4-5	4	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	5	4-5	4-5	2	5	5	4-5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	3	3-4	2	4	4-5	3-4		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	3										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	4	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	4-5	4-5	4-5	3-4	5	5	4-5		50ppm		4
	ISO 105 C10C	1/1N	4	4	5	2-3	5	5	3		100ppm		3
	ISO 105 C06 B2S	1/1N	4-5	5	5	4-5	5	5	4-5	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	4-5	5	5	4	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	4-5	4	2-3	4-5	4-5	5	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	4-5	4-5	4-5	3-4	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	4	3-4	2	4-5	4-5	4-5		Wet 濕		5

Light Fastness (Without Fixing Treatment)

日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4	6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	>6
	1/12N	4-5	>6		Alkali 鹼		4-5	>6
	1/3N	4-5	>6					
	1/1N	5	>6					
	2/1N	5	>6					

Everacid Yellow A-4R

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.09%	0.18%	0.35%	0.70%	1.6%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Excellent 極佳
Coverage of barré 橫條遮蓋性		Excellent 極佳
Suitability for wool dye 羊毛適染性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon>>Wool 尼龍>>羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Duller; Greener 較鈍; 綠味
Solubility g/l 溶解度	90°C water	60 g/l
	90°C→25°C	40 g/l
Color constancy 色恆性	Tungsten lamp	B
	TL84 lamp	G (Y)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4-5
	Cu ²⁺ 銅	3-4
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1-2
	Acetate 醋酸纖維	3
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	4
	Acrylic 壓克力	4
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2-3
	Alkaline	3-4
	Neutral	3
Stripping 脫色性	Oxidation	4-5
	Reduction	4

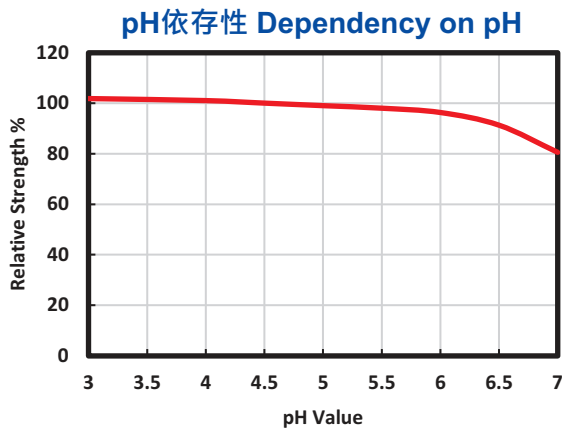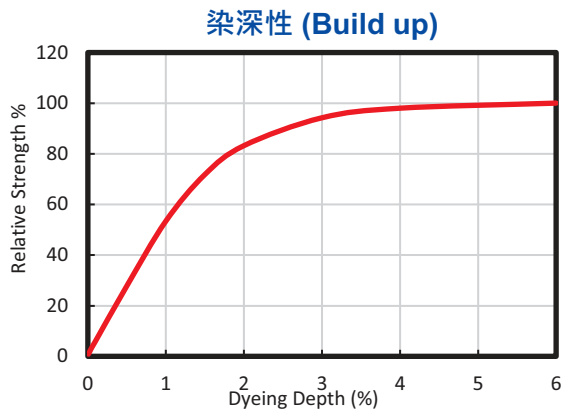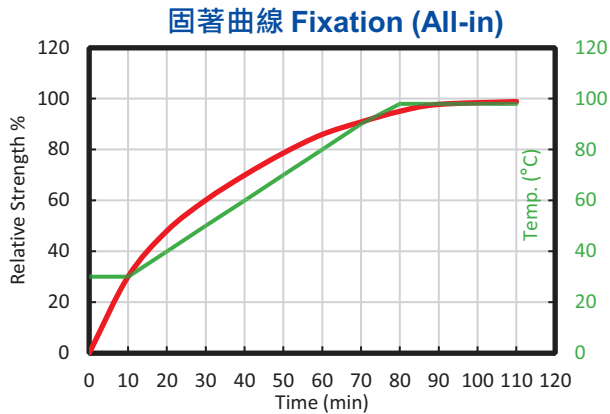

Everacid Yellow A-4R

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	3	5	4-5	4-5	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	3	4-5	4	4-5	5	5	4-5		50ppm		2-3
	ISO 105 C10C	1/1N	1-2	4-5	4	4-5	5	5	4-5		100ppm		1
	ISO 105 C06 B2S	1/1N	3	5	4-5	4-5	5	5	5	Saliva 耐唾液	1/1N	4	
Water 耐水		1/1N	5	5	5	3-4	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	5	4	4	3	4-5	4-5	4-5	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	5	4-5	4-5	3	5	5	4-5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	3-4	3-4	2-3	4	4-5	4		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	4-5	5	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	4-5	4-5	4-5	4-5	5	5	5		50ppm		5
	ISO 105 C10C	1/1N	3-4	5	4-5	4-5	5	5	4-5		100ppm		4
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	4-5	4-5	3-4	3-4	4-5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	3-4	4-5	4-5	4	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4	4	4	3	4-5	4-5	4-5		Wet 濕		5

Light Fastness (Without Fixing Treatment) 日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	6
	1/12N	5	>6		Alkali 鹼		4-5	6
	1/3N	5	>6					
	1/1N	5	>6					
	2/1N	5	>6					

Everacid Red A-2BN

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.20 %	0.40 %	0.80 %	1.60 %	1.92 %

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Medium 中
Coverage of barré 橫條遮蓋性		Excellent 極佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon>>Wool 尼龍>>羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Bluer 藍味
Solubility g/l 溶解度	90°C water	60 g/l
	90°C→25°C	60 g/l
Color constancy 色恆性	Tungsten lamp	Y (G)
	TL84 lamp	Y(G)
Metallic ions 金屬離子	Fe ²⁺ 鐵	5
	Cu ²⁺ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸	3-4
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	3
	Alkaline	3-4
	Neutral	3
Stripping 脫色性	Oxidation	5
	Reduction	2-3

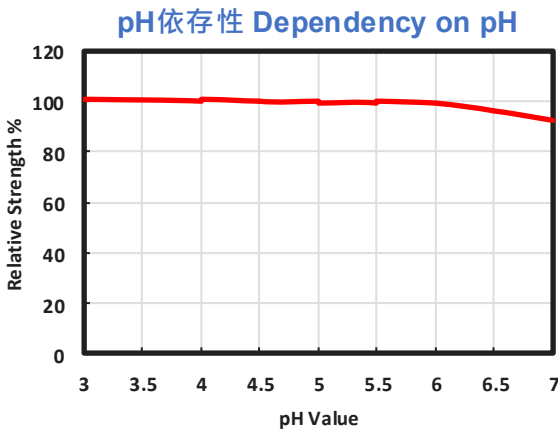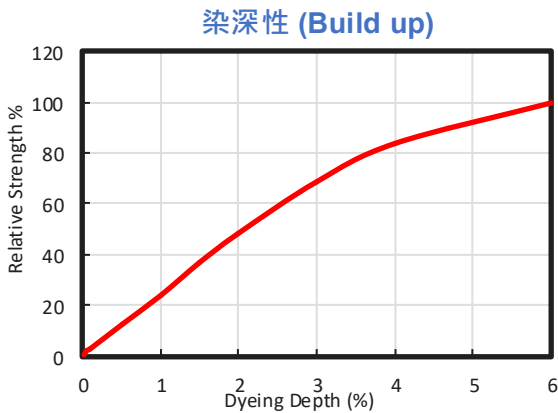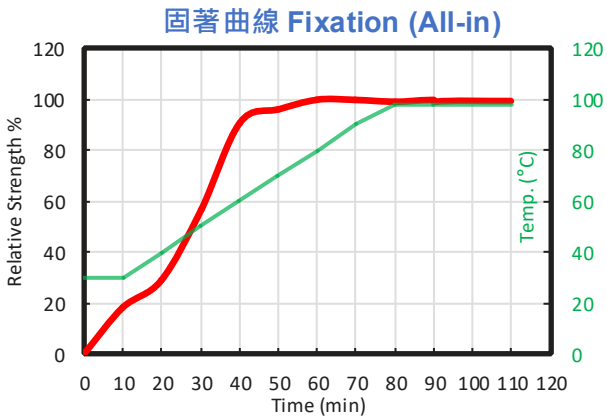

Everacid Red A-2BN

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC 61-2A	1/1N	3-4	5	4-5	3	5	5	3-4	Chlorinated Water 耐氯水	5ppm	1/1 N	4
	ISO 105 C10B	1/1N	3-4	4-5	4	2-3	5	5	3		3-4ppm		2-3
	ISO 105 C10C	1/1N	2-3	4-5	4	2	5	5	2		3-4ppm		1
	ISO 105 C06 B2S	1/1N	3-4	5	5	3-4	5	5	4-5	Saliva 耐唾液	1/1N	4-5	
Water 耐水		1/1N	5	5	5	4	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	4-5	4	2-3	4	4	4-5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	5	4-5	4-5	3	4-5	5	4-5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	4-5	3-4	2-3	3-4	4	4-5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	3-4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC 61-2A	1/1N	4-5	5	5	4-5	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	4-5	5	5	4	5	5	4-5		50ppm		3-4
	ISO 105 C10C	1/1N	4	5	4-5	2-3	5	5	3		100ppm		3-4
	ISO 105 C06 B2S	1/1N	4-5	5	5	4-5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	5	4	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	4	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	4-5	4-5	3-4	4	4	4-5		Wet 濕		5

Light Fastness (Without Fixing Treatment) 日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	>6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	5	>6
	1/12N	4-5	>6		Alkali 鹼		5	>6
	1/3N	4-5	>6					
	1/1N	5	>6					
	2/1N	5	>6					

Everacid Bordeaux A-RL

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.11%	0.23%	0.45%	0.90%	1.80%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Excellent 極佳
Coverage of barré 橫條遮蓋性		Good 佳
Suitability for wool dye 羊毛適染性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon>Wool 尼龍>羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Duller; Redder 較鈍; 紅味
Solubility g/l 溶解度	90°C water	80 g/l
	90°C→25°C	60 g/l
Color constancy 色恆性	Tungsten lamp	R (Y)
	TL84 lamp	G (Y)
Metallic ions 金屬離子	Fe 2+ 鐵	4-5
	Cu 2+ 銅	2
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	2
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	2-3
	Acrylic 壓克力	2-3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2
	Alkaline	2-3
	Neutral	3
Stripping 脫色性	Oxidation	4-5
	Reduction	1

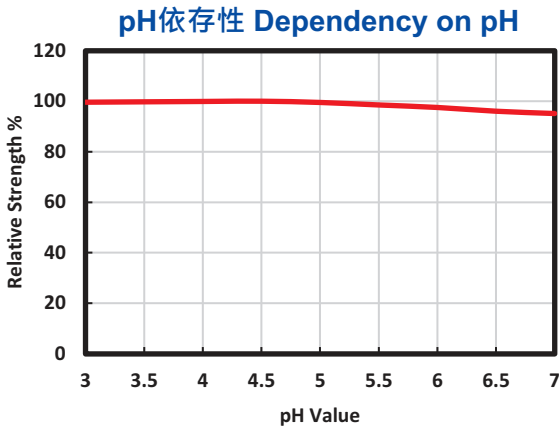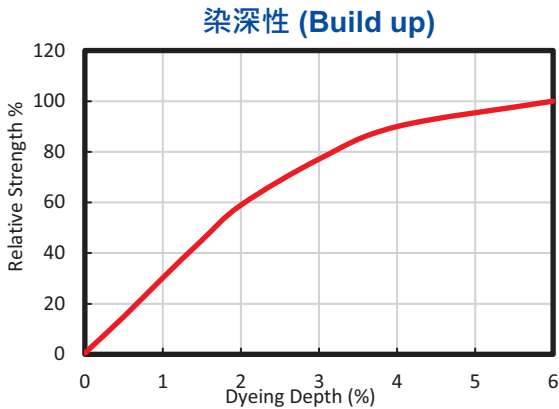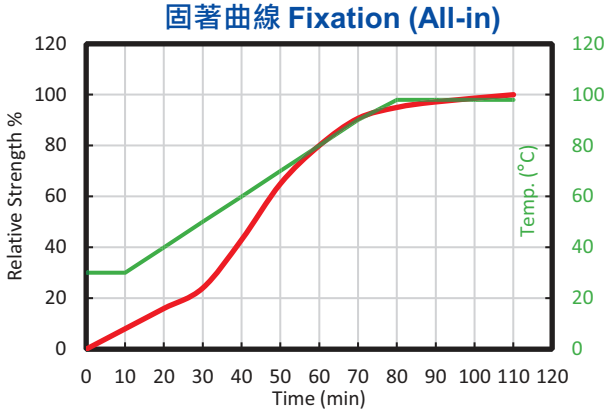

Everacid Bordeaux A-RL

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	3	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	2-3	5	5	5		50ppm		2-3
	ISO 105 C10C	1/1N	4-5	5	5	2	5	5	4-5		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	5	5	3	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	4-5	5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	3-4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	3-4	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	3	5	5	5		50ppm		4-5
	ISO 105 C10C	1/1N	4-5	5	5	2-3	5	5	4-5		100ppm		4
	ISO 105 C06 B2S	1/1N	4-5	5	5	3-4	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	>6
	1/12N	4-5	>6		Alkali 鹼		4-5	>6
	1/3N	5	>6					
	1/1N	5	>6					
	2/1N	5	>6					

Everacid Blue A-RRL

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.16%	0.33%	0.65%	1.30%	1.56%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Excellent 極佳
Coverage of barré 橫條遮蓋性		Excellent 極佳
Suitability for wool dye 羊毛適染性		Good 可
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon>>Wool 尼龍>>羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	40 g/l
	90°C→25°C	40 g/l
Color constancy 色恆性	Tungsten lamp	R
	TL84 lamp	R(Y)
Metallic ions 金屬離子	Fe 2+ 鐵	4
	Cu 2+ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	4
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1
	Alkaline	1
	Neutral	1
Stripping 脫色性	Oxidation	3-4
	Reduction	1

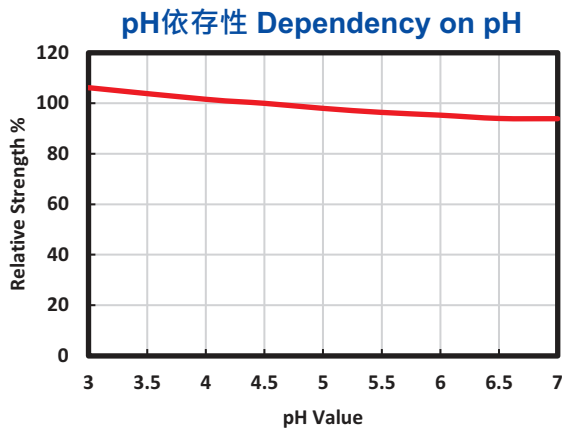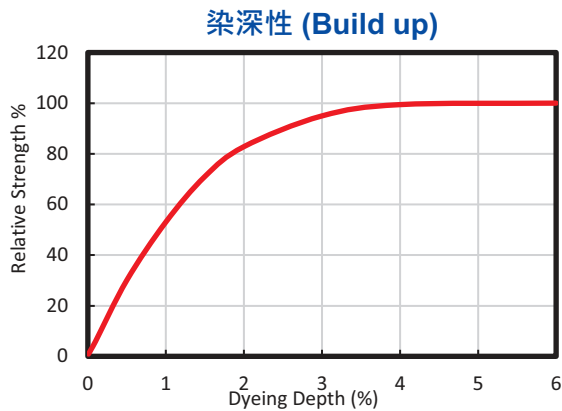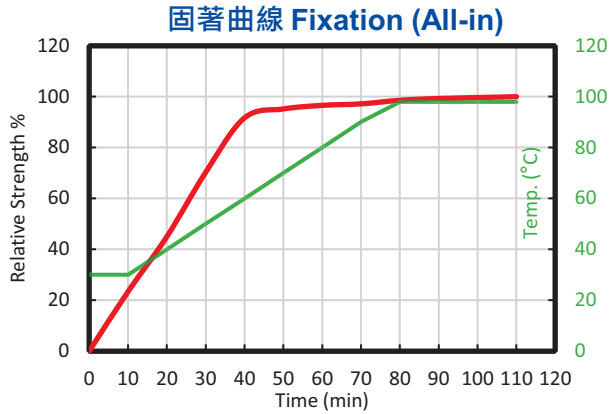

Everacid Blue A-RRL

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	2	4-5	3-4	1-2	5	5	2	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	2	3	3-4	1-2	5	5	2		50ppm		1-2
	ISO 105 C10C	1/1N	1	2	3-4	1	5	5	1-2		100ppm		1
	ISO 105 C06 B2S	1/1N	2	3-4	4	2	5	5	3	Saliva 耐唾液	1/1N	4	
Water 耐水		1/1N	5	4-5	4-5	1-2	4	4-5	3-4	Bleeding 色泣牢度 (Daimru)		1/1N	3-4
Sea Water 耐海水		1/1N	4-5	3-4	3-4	2	4	4-5	2-3	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	4-5	3-4	4	2	4-5	4-5	3	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	2-3	3	1-2	3-4	4	2		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	3										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	2-3	4	4	2-3	5	5	3-4	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	2-3	3-4	4	2	5	5	2-3		50ppm		3-4
	ISO 105 C10C	1/1N	2	2-3	4-5	1-2	5	5	1-2		100ppm		2-3
	ISO 105 C06 B2S	1/1N	2-3	4	4-5	2-3	5	5	4	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	4-5	4-5	4-5	2-3	4-5	5	4	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	4	3-4	4	2-3	4	3-4	4	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	4	4	4	2-3	4-5	4-5	4-5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4	2-3	3	1-2	4	4	3		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	>6
	1/12N	4-5	>6		Alkali 鹼		4-5	>6
	1/3N	4-5	>6					
	1/1N	5	>6					
	2/1N	5	>6					

Everacid Blue A-RL

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.18%	0.35%	0.70%	1.40%	1.68%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Excellent 極佳
Coverage of barré 橫條遮蓋性		Excellent 極佳
Suitability for wool dye 羊毛適染性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon>>Wool 尼龍>>羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	40 g/l
	90°C→25°C	10 g/l
Color constancy 色恆性	Tungsten lamp	R (B)
	TL84 lamp	R (B)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4
	Cu ²⁺ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1-2
	Acetate 醋酸纖維	1
	Cotton 棉	3-4
	Nylon 尼龍	1
	Polyester 聚酯	4
	Acrylic 壓克力	4-5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1
	Alkaline	1
	Neutral	1
Stripping 脫色性	Oxidation	3-4
	Reduction	3

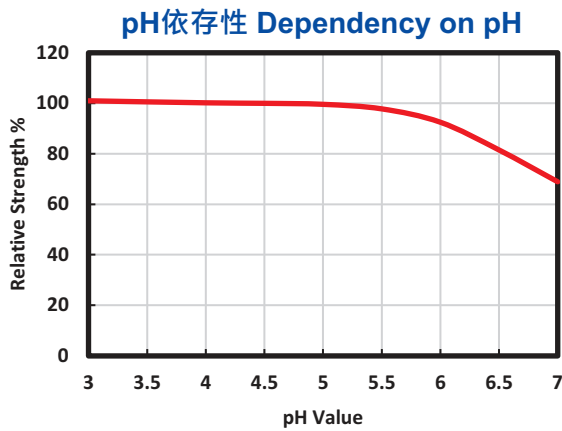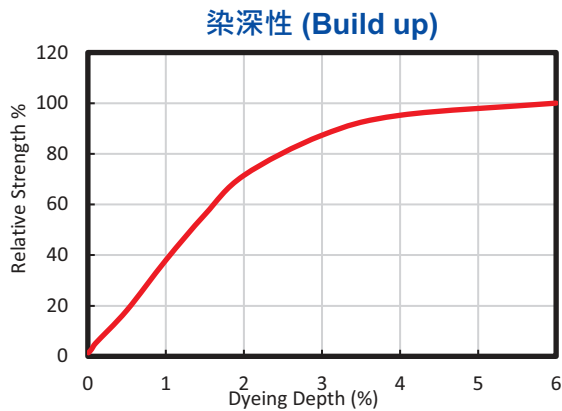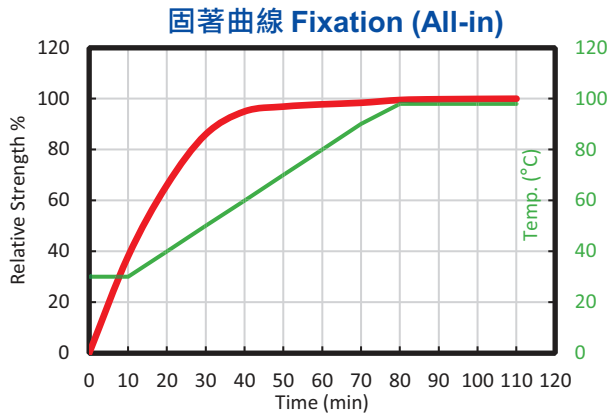

Everacid Blue A-RL

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	2	4-5	3	2	5	5	2	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	2	3	3	2	5	5	2		50ppm		2
	ISO 105 C10C	1/1N	1	2-3	2-3	1-2	5	5	1-2		100ppm		1
	ISO 105 C06 B2S	1/1N	2	3-4	3-4	2-3	5	5	3-4	Saliva 耐唾液	1/1N	3-4	
Water 耐水		1/1N	5	4-5	4-5	2	4	4-5	4-5	Bleeding 色泣牢度 (Daimru)		1/1N	3-4
Sea Water 耐海水		1/1N	4-5	3-4	3-4	2	4	4-5	3-4	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	4	4	2-3	4-5	4-5	3-4	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	2-3	2-3	2	3-4	4	2-3		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	3-4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	2-3	4-5	4	3	5	5	4	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	2-3	3-4	3-4	2-3	5	5	3		50ppm		3-4
	ISO 105 C10C	1/1N	2	3	3-4	2	5	5	2		100ppm		2-3
	ISO 105 C06 B2S	1/1N	2-3	4-5	4	3	5	5	4-5	Saliva 耐唾液	1/1N	4-5	
Water 耐水		1/1N	5	4-5	4-5	3-4	4-5	5	4-5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	4	4-5	4-5	3-4	4-5	4-5	4-5	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	4-5	4-5	4-5	3-4	5	5	4-5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	3-4	3-4	2-3	4-5	4	4		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	5-6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5
	1/12N	4-5	5-6				>6
	1/3N	4-5	6		Alkali 鹼		>6
	1/1N	4-5	>6				
	2/1N	5	>6				

Everacid Yellow N-5GW

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.14%	0.28%	0.55%	1.10%	1.32%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium 中
Migration 移染性		Excellent 極佳
Coverage of barré 橫條遮蓋性		Excellent 極佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon > Wool 尼龍 > 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	40 g/l
	90°C→25°C	40 g/l
Color constancy 色恆性	Tungsten lamp	G (Y)
	TL84 lamp	G (B)
Metallic ions 金屬離子	Fe ²⁺ 鐵	2
	Cu ²⁺ 銅	1-2
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	5
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	3-4
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2
	Alkaline	4
	Neutral	2
Stripping 脫色性	Oxidation	4-5
	Reduction	1

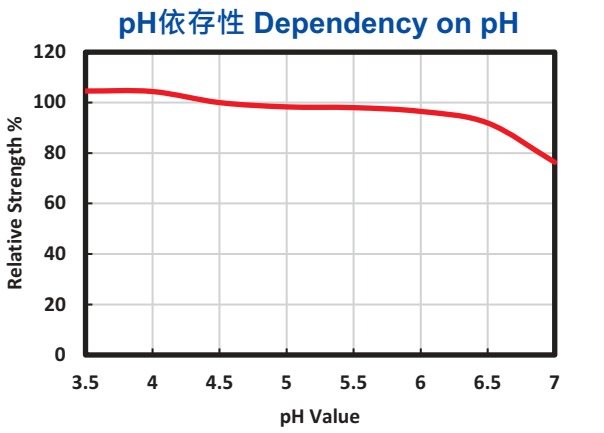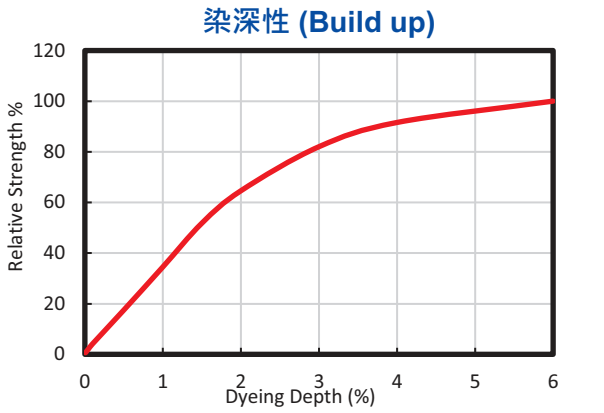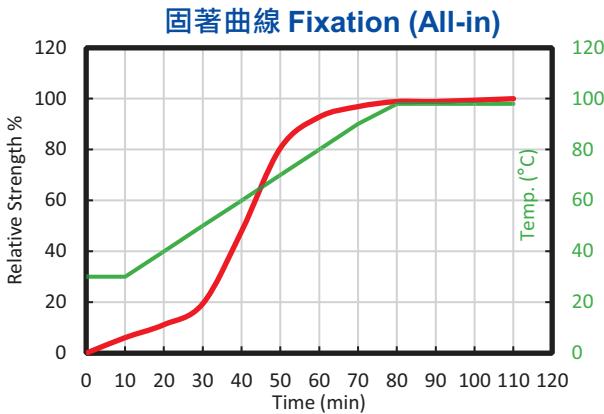

Everacid Yellow N-5GW

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛				
Fastness Item													
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	4-5	5	5	5		50ppm		4-5
	ISO 105 C10C	1/1N	4	5	5	4-5	5	5	4-5		100ppm		3-4
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	5	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	4-5	4-5	4-5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	4-5	4	4-5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	4-5	5	5	5	5	5	5		50ppm		5
	ISO 105 C10C	1/1N	4-5	5	5	4-5	5	5	5		100ppm		5
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	5	4-5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	> 6
	1/12N	4-5	> 6		Alkali 鹼		4-5	> 6
	1/3N	5	> 6					
	1/1N	5	> 6					
	2/1N	5	> 6					

Everacid Yellow N-MR

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.09%	0.18%	0.35%	0.70%	1.40%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium 中
Migration 移染性		Excellent 極佳
Coverage of barré 橫條遮蓋性		Excellent 極佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon > Wool 尼龍 > 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	60 g/l
	90°C→25°C	60 g/l
Color constancy 色恆性	Tungsten lamp	G (B)
	TL84 lamp	G (Y)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4
	Cu ²⁺ 銅	1-2
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1-2
	Acetate 醋酸纖維	5
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	4
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2
	Alkaline	4
	Neutral	2
Stripping 脫色性	Oxidation	3-4
	Reduction	1

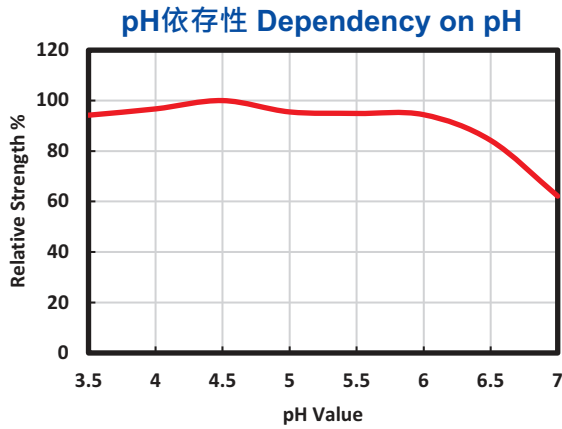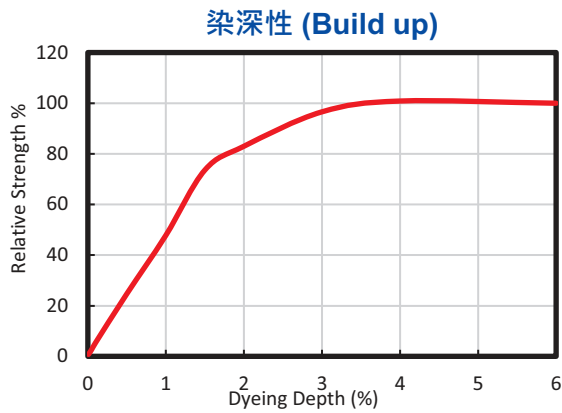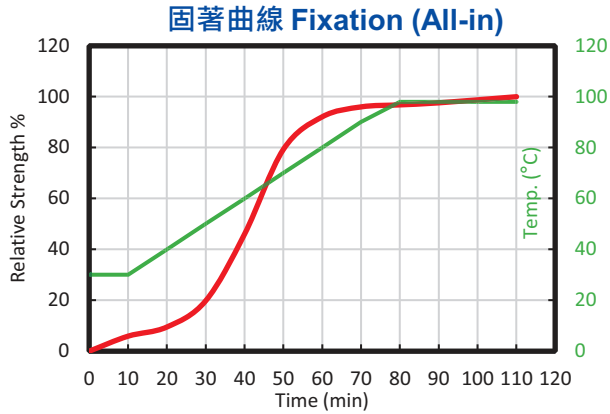

Everacid Yellow N-MR

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	3
	ISO 105 C10B	1/1N	4-5	5	5	5	5	5	5		50ppm		1-2
	ISO 105 C10C	1/1N	4	5	5	5	5	5	5		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	3-4	5	4-5	4-5	4-5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗		Acid 酸	1/1N	3-4	5	5	4-5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
		Alkali 鹼		5	4-5	4-5	4-5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4	5	5	5	5	5	5		50ppm		4-5
	ISO 105 C10C	1/1N	4-5	5	5	5	5	5	5		100ppm		4-5
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	3	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	3-4	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		3-4	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment) 日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	3	4	Perspiration Light 耐汗日光	Acid 酸	1/1 N	3	5
	1/12N	3-4	4		Alkali 鹼		3	4-5
	1/3N	3-4	4-5					
	1/1N	4	5					
	2/1N	4	5-6					

Everacid Yellow N-3RL

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.09%	0.18%	0.35%	0.70%	1.40%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Small 小
Migration 移染性		Good 佳
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon > Wool 尼龍 > 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	60 g/l
	90°C→25°C	40 g/l
Color constancy 色恆性	Tungsten lamp	G (B)
	TL84 lamp	G (Y)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4-5
	Cu ²⁺ 銅	3-4
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	5
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	5
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	3
	Alkaline	1
	Neutral	2-3
Stripping 脫色性	Oxidation	4
	Reduction	1

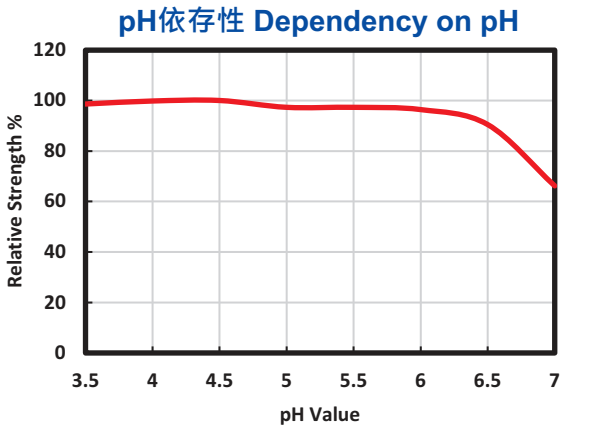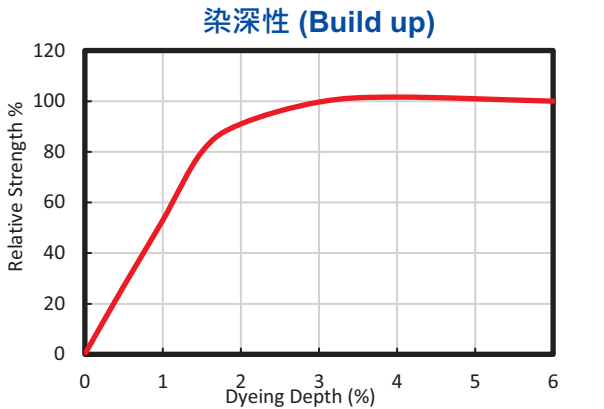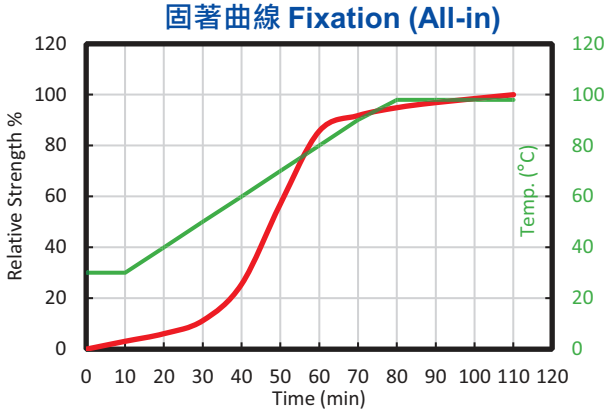

Everacid Yellow N-3RL

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	3-4
	ISO 105 C10B	1/1N	4-5	5	5	5	5	5	5		50ppm		1
	ISO 105 C10C	1/1N	3-4	5	5	5	5	5	3-4		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4	5	4-5	4-5	4-5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	5	5	5	5		50ppm		3-4
	ISO 105 C10C	1/1N	4-5	5	5	5	5	5	5		100ppm		3
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment) 日光堅牢度 (未固色)

Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4	5-6	Perspiration Light	Acid 酸	1/1 N	4-5	> 6
	1/12N	4-5	6	耐汗日光	Alkali 鹼		4-5	> 6
	1/3N	4-5	6					
	1/1N	5	> 6					
	2/1N	5	> 6					


Everacid Yellow N-3R

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.1%	0.2%	0.4%	0.8%	1.6%


Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Medium 中
Coverage of barré 橫條遮蓋性		Medium 中
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon > Wool 尼龍 > 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	80 g/l
	90°C→25°C	80 g/l
Color constancy 色恆性	Tungsten lamp	G (B)
	TL84 lamp	G (Y)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4-5
	Cu ²⁺ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	2
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	3
	Alkaline	3-4
	Neutral	3-4
Stripping 脫色性	Oxidation	4-5
	Reduction	1


固著曲線 Fixation (All-in)

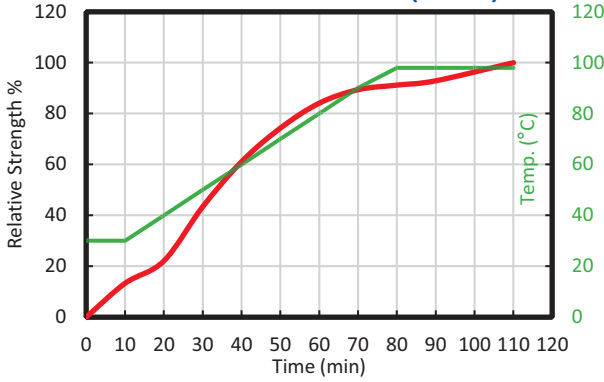

染深性 (Build up)

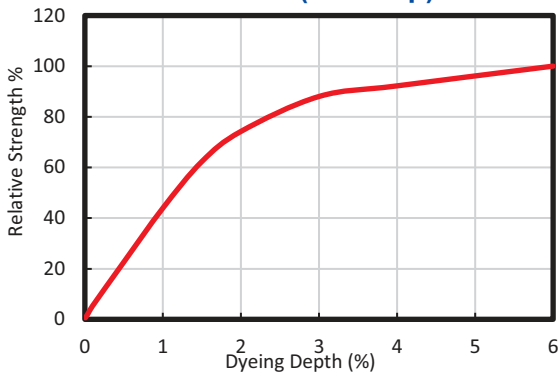

pH依存性 Dependency on pH

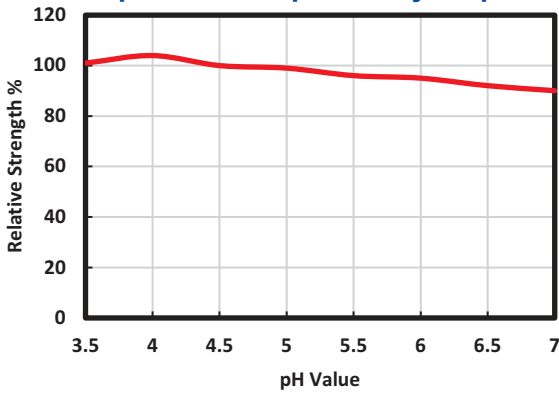

Everacid Yellow N-3R

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	3-4	4-5	3	5	5	4	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	4	3-4	4-5	3	5	5	5		50ppm		3-4
	ISO 105 C10C	1/1N	3	3	4-5	2-3	4-5	5	3		100ppm		2
	ISO 105 C06 B2S	1/1N	4-5	4	4-5	3-4	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	5	5	4-5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	4-5	4-5	4-5	4-5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	4-5	4-5	4	4-5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4	4	4-5	3-4	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	4-5	4-5	4-5	3-4	4-5	5	4-5		50ppm		4-5
	ISO 105 C10C	1/1N	4	3-4	4-5	2-3	4-5	5	3-4		100ppm		4
	ISO 105 C06 B2S	1/1N	4-5	4-5	5	4-5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	4-5	4-5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)

日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4	5	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4	6
	1/12N	4-5	5-6		Alkali 鹼		3-4	6
	1/3N	4-5	6					
	1/1N	4-5	6					
	2/1N	4-5	> 6					

Everacid Orange N-G

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.08%	0.15%	0.30%	0.60%	1.20%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Small 小
Migration 移染性		Good 佳
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon = Wool 尼龍 = 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Redder 紅味
Solubility g/l 溶解度	90°C water	40 g/l
	90°C→25°C	30 g/l
Color constancy 色恆性	Tungsten lamp	R (Y)
	TL84 lamp	Y
Metallic ions 金屬離子	Fe ²⁺ 鐵	4-5
	Cu ²⁺ 銅	1
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4-5
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	4
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1
	Alkaline	4
	Neutral	2
Stripping 脫色性	Oxidation	4
	Reduction	1

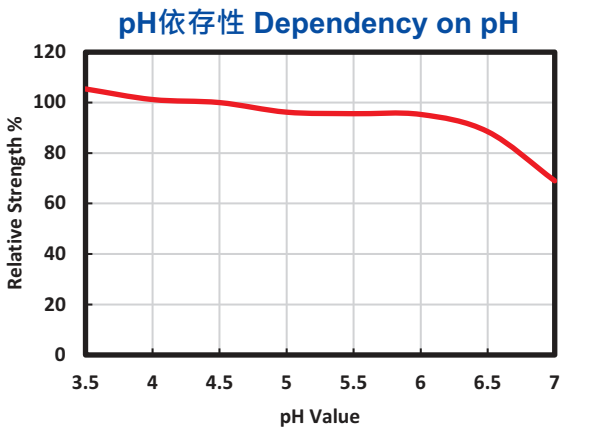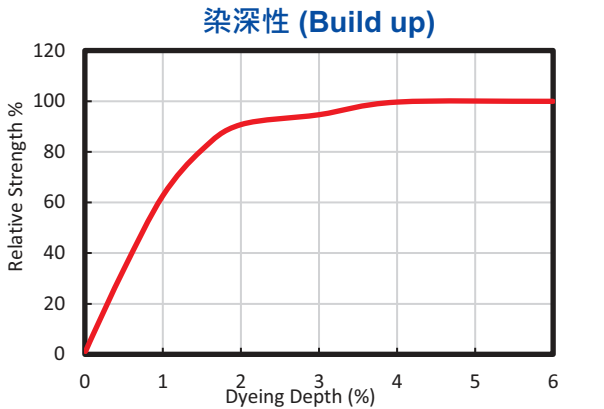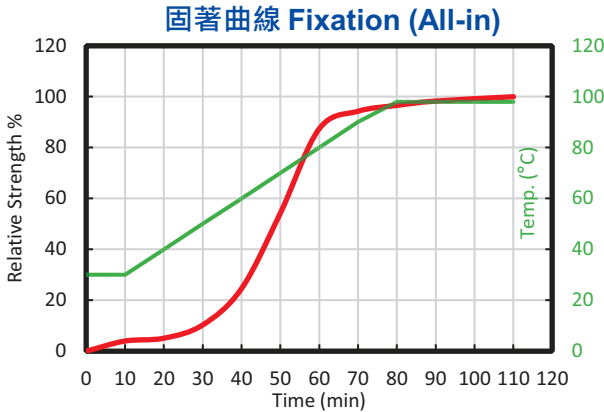

Everacid Orange N-G

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	3
	ISO 105 C10B	1/1N	4-5	5	5	5	5	5	5		50ppm		2-3
	ISO 105 C10C	1/1N	4	5	4-5	4-5	5	5	4-5		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	5	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	4-5	4-5	4-5	4-5	4-5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	4-5	4-5	4	4-5	4-5	4-5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	4-5	5	5	5	5	5	5		50ppm		4-5
	ISO 105 C10C	1/1N	4-5	5	5	5	5	5	5		100ppm		4-5
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	1-2	2	Perspiration Light 耐汗日光	Acid 酸	1/1 N	2	3
	1/12N	2	2-3		Alkali 鹼		2	3
	1/3N	2	2-3					
	1/1N	2	3					
	2/1N	3	3					

Everacid Orange N-GTL

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.06%	0.13%	0.25%	0.50%	1.00%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium to Large 中~大
Migration 移染性		Excellent 極佳
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	40 g/l
	90°C→25°C	< 10 g/l
Color constancy 色恆性	Tungsten lamp	R (Y)
	TL84 lamp	G (Y)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4
	Cu ²⁺ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	5
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	4-5
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	3
	Alkaline	2
	Neutral	3
Stripping 脫色性	Oxidation	4-5
	Reduction	1

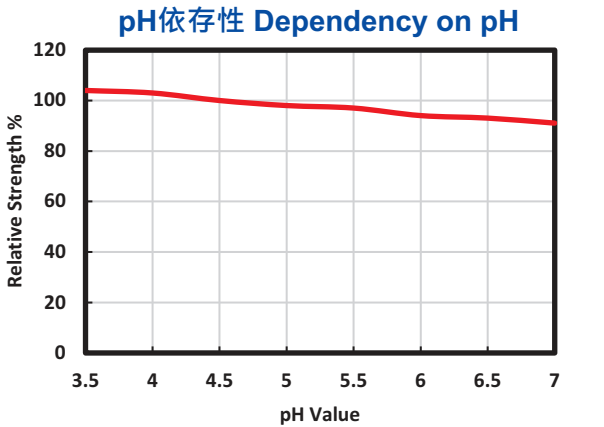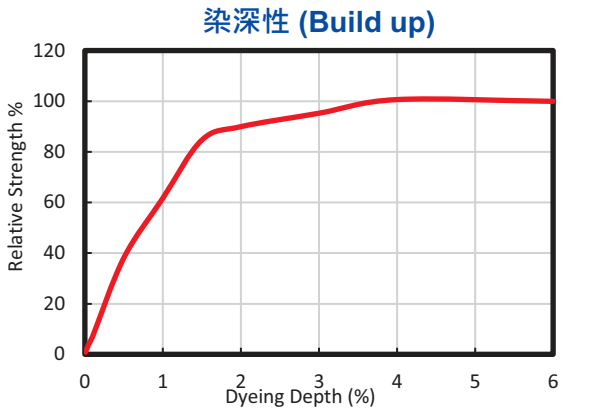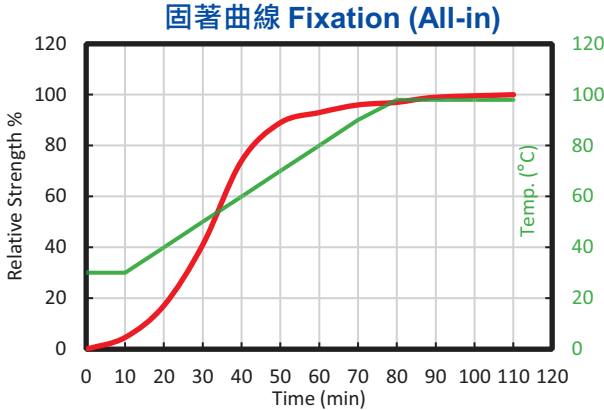

Everacid Orange N-GTL

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	4-5	4	3	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4	4-5	4-5	3	5	5	4-5		50ppm		4
	ISO 105 C10C	1/1N	3	4-5	4	2-3	5	5	3-4		100ppm		3-4
	ISO 105 C06 B2S	1/1N	4	5	4-5	3-4	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	4	5	5	4	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4	4-5	4-5	4-5	5	5	4-5	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	3-4	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	4-5	4-5	4	5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	4-5	4	3-4	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	4-5	5	4-5	3-4	5	5	5		50ppm		4-5
	ISO 105 C10C	1/1N	4-5	4-5	4-5	3	5	5	4		100ppm		4-5
	ISO 105 C06 B2S	1/1N	4-5	5	4-5	4-5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	4-5	4-5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment) 日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4	5-6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4	6
	1/12N	4	6		Alkali 鹼		3-4	6
	1/3N	4	6					
	1/1N	4-5	6					
	2/1N	5	> 6					

Everacid Red N-B

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.20%	0.40%	0.80%	1.6%	1.92%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium to Large 中~大
Migration 移染性		Excellent 極佳
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Bluer 藍味
Solubility g/l 溶解度	90°C water	80 g/l
	90°C→25°C	80 g/l
Color constancy 色恆性	Tungsten lamp	R (Y)
	TL84 lamp	Y
Metallic ions 金屬離子	Fe ²⁺ 鐵	4
	Cu ²⁺ 銅	3
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	5
	Cotton 棉	4
	Nylon 尼龍	1
	Polyester 聚酯	5
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	3
	Alkaline	2-3
	Neutral	3
Stripping 脫色性	Oxidation	5
	Reduction	2

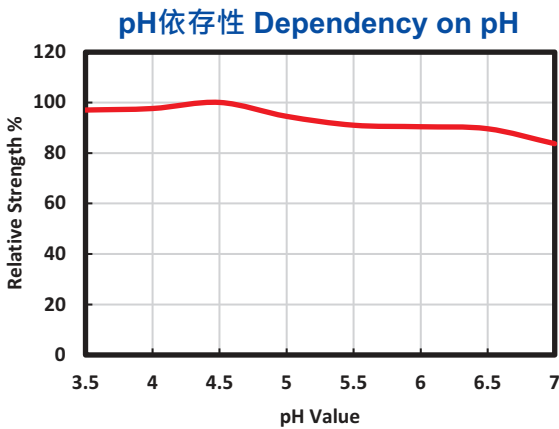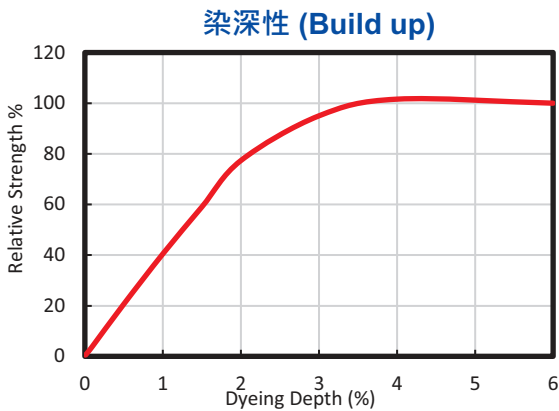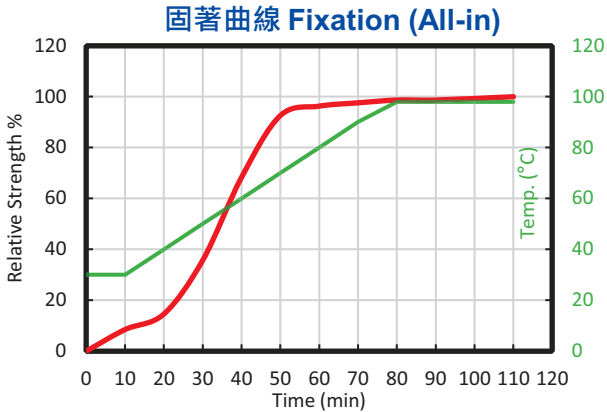

Everacid Red N-B

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4	5	5	5	5	5	5		50ppm		4-5
	ISO 105 C10C	1/1N	3	5	5	4-5	5	5	4-5		100ppm		4
	ISO 105 C06 B2S	1/1N	4	5	5	5	5	5	5	Saliva 耐唾液	1/1N	4-5	
Water 耐水		1/1N	4-5	5	5	4	4-5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4	4-5	4	3	3-4	4	4-5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	4-5	4	3	4	4-5	4		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	3-4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛				
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	5	5	5	5		50ppm		4-5
	ISO 105 C10C	1/1N	4	5	5	5	5	5	5		100ppm		4-5
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	4-5	4-5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	1-2	2-3	Perspiration Light 耐汗日光	Acid 酸	1/1 N	2	3-4
	1/12N	1-2	3		Alkali 鹼		2	3-4
	1/3N	2	3					
	1/1N	2	3-4					
	2/1N	2	3-4					

Everacid Red N-2BL

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.19%	0.38%	0.75%	1.50%	1.80%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Good 佳
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	80 g/l
	90°C→25°C	60 g/l
Color constancy 色恆性	Tungsten lamp	R (Y)
	TL84 lamp	G (Y)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4
	Cu ²⁺ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	3
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	2-3
	Acrylic 壓克力	2-3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	3
	Alkaline	4
	Neutral	3-4
Stripping 脫色性	Oxidation	4-5
	Reduction	4

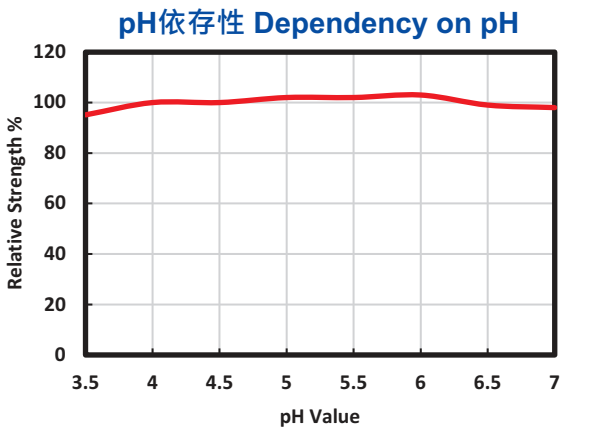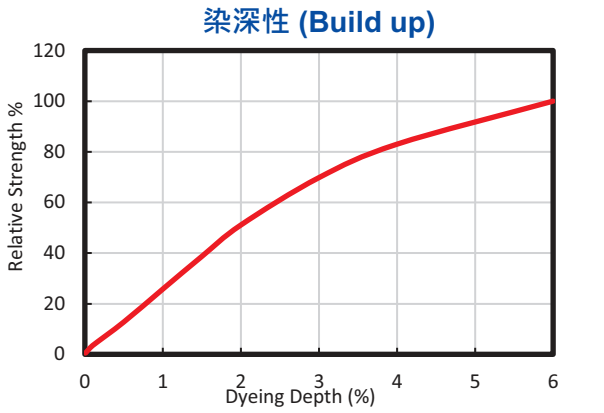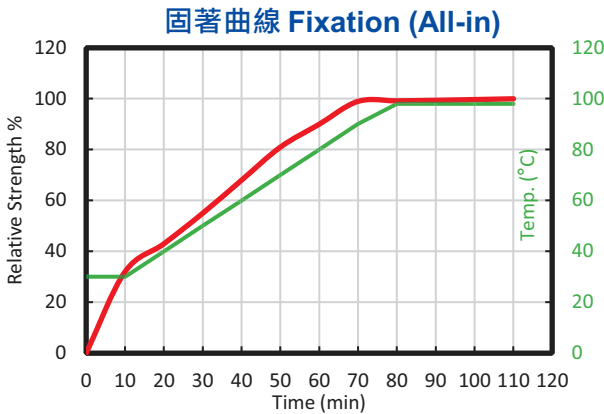

Everacid Red N-2BL

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	3	5	4-5	4	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	3	5	4-5	4	5	5	4-5		50ppm		2
	ISO 105 C10C	1/1N	2-3	5	4-5	4	5	5	3		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	5	5	4-5	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	5	5	5	4	4-5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	4-5	4	4-5	4-5	4-5	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	4-5	3-4	4-5	4-5	4-5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	3-4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4	5	5	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	3-4	5	4-5	4-5	5	5	4-5		50ppm		4
	ISO 105 C10C	1/1N	3-4	5	4-5	4-5	5	5	3-4		100ppm		3
	ISO 105 C06 B2S	1/1N	4-5	5	5	4-5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	4-5	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	4-5	4-5	4-5	4-5	5	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	4-5	4	4-5	4-5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)

Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4	5	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4	5-6
	1/12N	4-5	5		Alkali 鹼		4	5-6
	1/3N	4-5	5-6					
	1/1N	4-5	5-6					
	2/1N	4-5	6					


Everacid Red Brown N-V

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.09%	0.18%	0.35%	0.70%	1.40%


Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium to Large 中~大
Migration 移染性		Excellent 極佳
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Yellower 黃味
Solubility g/l 溶解度	90°C water	50 g/l
	90°C→25°C	50 g/l
Color constancy 色恆性	Tungsten lamp	R (Y)
	TL84 lamp	G (B)
Metallic ions 金屬離子	Fe ²⁺ 鐵	5
	Cu ²⁺ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	5
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	5
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	3
	Alkaline	3
	Neutral	3
Stripping 脫色性	Oxidation	4-5
	Reduction	1


固著曲線 Fixation (All-in)

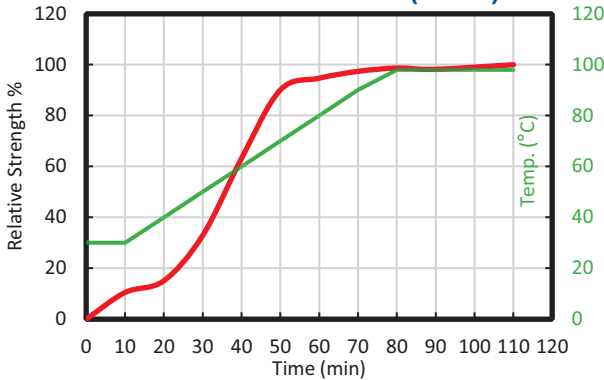

染深性 (Build up)

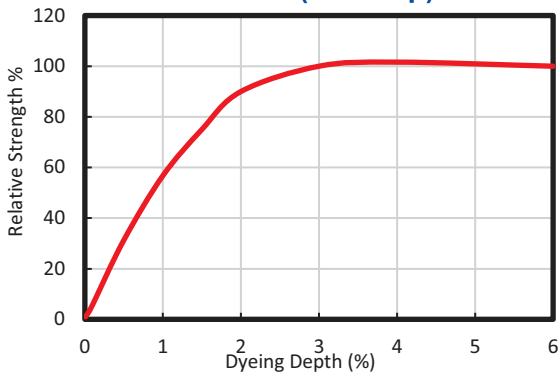

pH依存性 Dependency on pH

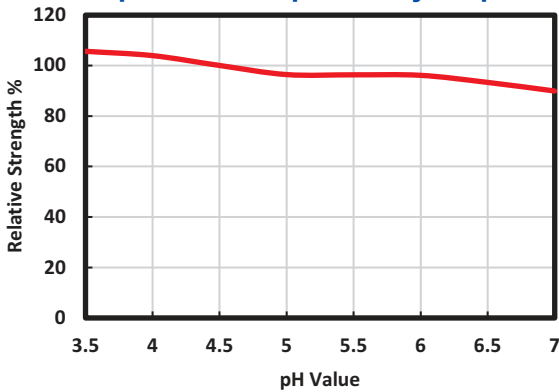

Everacid Red Brown N-V

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	3-4	5	4	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	2
	ISO 105 C10B	1/1N	3-4	5	4	4-5	5	5	5		50ppm		1
	ISO 105 C10C	1/1N	3-4	5	4	4	5	5	4		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	5	4-5	4-5	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	5	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4	5	5	4-5	4-5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	3-4
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4	5	4-5	4-5	4-5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	3-4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	4-5	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4	5	4-5	5	5	5	5		50ppm		1-2
	ISO 105 C10C	1/1N	4	5	4-5	4-5	5	5	4-5		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	5	5	4-5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	3-4	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4	5	5	4-5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)

日光堅牢度 (未固色)

Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4	4-5	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	5-6
	1/12N	4	5		Alkali 鹼		4-5	5-6
	1/3N	4-5	5-6					
	1/1N	4-5	5-6					
	2/1N	4-5	6					


Everacid Rubine N-5BL

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.05%	0.10%	0.20%	0.40%	0.80%


Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Excellent 極佳
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Yellower 黃味
Solubility g/l 溶解度	90°C water	50 g/l
	90°C→25°C	20 g/l
Color constancy 色恆性	Tungsten lamp	R (Y)
	TL84 lamp	G (B)
Metallic ions 金屬離子	Fe ²⁺ 鐵	5
	Cu ²⁺ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4
	Cotton 棉	4
	Nylon 尼龍	1
	Polyester 聚酯	4-5
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	3
	Alkaline	2
	Neutral	3
Stripping 脫色性	Oxidation	4-5
	Reduction	1


固著曲線 Fixation (All-in)

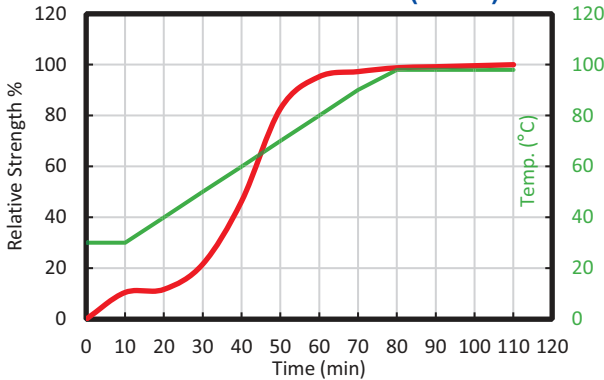

染深性 (Build up)

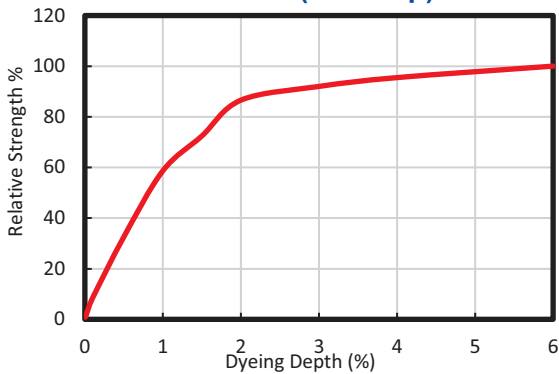

pH依存性 Dependency on pH

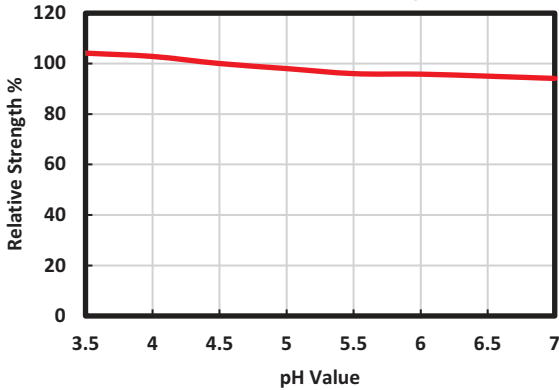

Everacid Rubine N-5BL

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	4-5	2-3	2-3	5	5	4	Chlorinated Water 耐氯水	20ppm	1/1 N	1-2
	ISO 105 C10B	1/1N	4	4-5	3	2-3	5	5	4-5		50ppm		1
	ISO 105 C10C	1/1N	3	4	2-3	2	5	5	3		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	4-5	3-4	3	5	5	5	Saliva 耐唾液	1/1N	4-5	
Water 耐水		1/1N	4-5	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	5	4	4-5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	4-5	4-5	5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	3-4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	3-4	3-4	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4	5	3-4	3	5	5	4-5		50ppm		1-2
	ISO 105 C10C	1/1N	4-5	4-5	3	2-3	5	5	3-4		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	5	4-5	4	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4	5	5	4-5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	4	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		3-4	5	4-5	4-5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)

日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	3	4	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4	5
	1/12N	3-4	4-5		Alkali 鹼		4	5
	1/3N	4	4-5					
	1/1N	4	5					
	2/1N	4-5	6					

Everacid Turq. Blue N-GRL

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.38%	0.75%	1.5%	3.0%	3.6%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	80 g/l
	90°C→25°C	80 g/l
Color constancy 色恆性	Tungsten lamp	R (B)
	TL84 lamp	R (B)
Metallic ions 金屬離子	Fe ²⁺ 鐵	5
	Cu ²⁺ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	2
	Cotton 棉	1
	Nylon 尼龍	1
	Polyester 聚酯	1-2
	Acrylic 壓克力	1-2
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1
	Alkaline	1
	Neutral	1
Stripping 脫色性	Oxidation	4-5
	Reduction	3-4

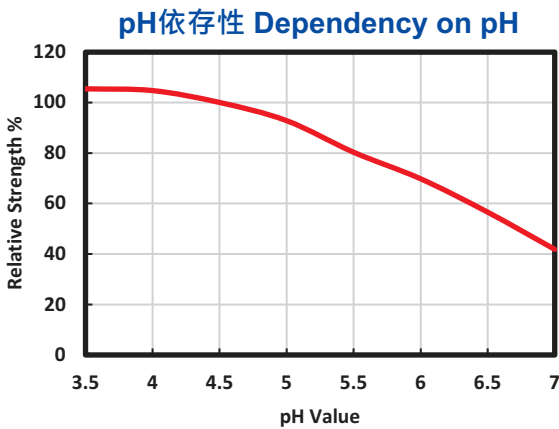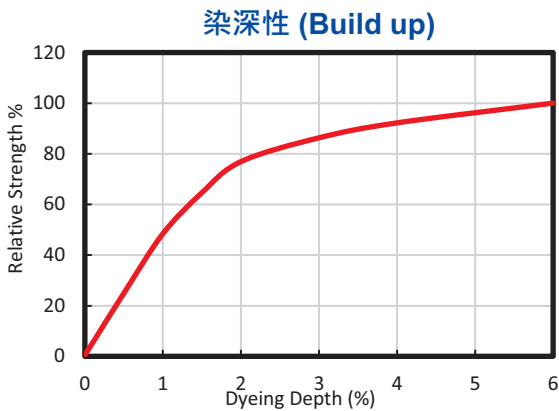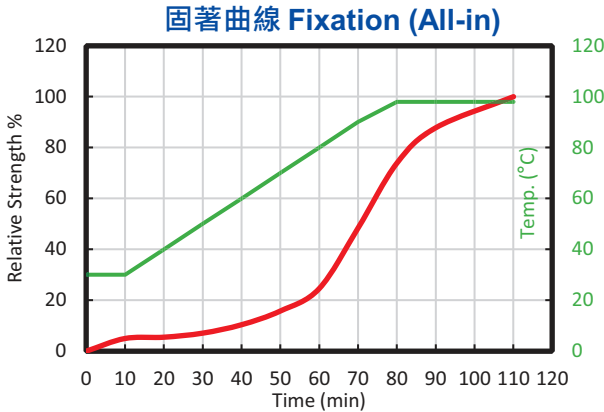

Everacid Turq. Blue N-GRL

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	4	3-4	2	2-3	2	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	3-4
	ISO 105 C10B	1/1N	4-5	3-4	3-4	2-3	3	2	3-4		50ppm		3
	ISO 105 C10C	1/1N	4-5	3-4	3	2	3	2	3-4		100ppm		2-3
	ISO 105 C06 B2S	1/1N	5	4	4	2-3	3	2-3	4	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	5	4-5	4-5	4	3-4	3-4	4-5	Bleeding 色泣牢度 (Daimru)		1/1N	3-4
Sea Water 耐海水		1/1N	4	5	5	4-5	4-5	4-5	5	Nitrogen Oxides 氣體變褪色		1/1N	3-4
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	4-5	4	4	4	5	Rubbing 耐摩擦	Dry 乾	1/1N	3
	Alkali 鹼		4-5	5	4-5	4	4	4	5		Wet 濕		2-3
Hot pressing 耐熱壓	Immediately 立即	1/1N	4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	4-5	3	3-4	3-4	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	3
	ISO 105 C10B	1/1N	4-5	4	4-5	2-3	3-4	3	4-5		50ppm		1-2
	ISO 105 C10C	1/1N	4-5	4	4	2-3	3-4	3	4		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	4-5	4-5	3	3-4	3-4	4-5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	4-5	4-5	4-5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4
Sea Water 耐海水		1/1N	3-4	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	4
	Alkali 鹼		4	5	5	4-5	4-5	4-5	5		Wet 濕		3-4

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	1	2	Perspiration Light 耐汗日光	Acid 酸	1/1 N	2-3	3
	1/12N	1-2	2		Alkali 鹼		2-3	2
	1/3N	2	2					
	1/1N	2	2					
	2/1N	2	2					

Everacid Blue N-AFN

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.29%	0.58%	1.15%	2.3%	2.76%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Medium 中
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Yellower 黃味
Solubility g/l 溶解度	90°C water	40 g/l
	90°C→25°C	40 g/l
Color constancy 色恆性	Tungsten lamp	R (B)
	TL84 lamp	R (B)
Metallic ions 金屬離子	Fe ²⁺ 鐵	5
	Cu ²⁺ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	5
	Cotton 棉	4
	Nylon 尼龍	1
	Polyester 聚酯	4-5
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1
	Alkaline	1
	Neutral	1
Stripping 脫色性	Oxidation	4-5
	Reduction	1

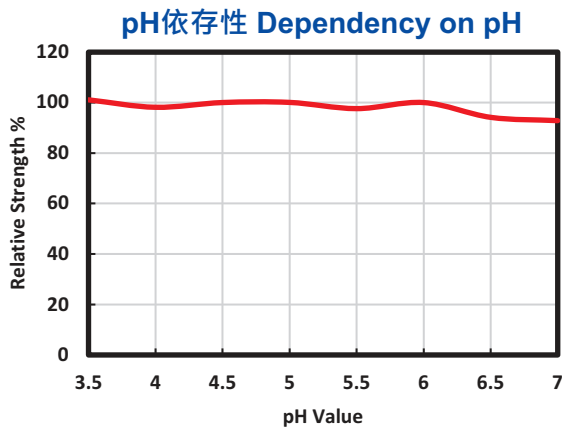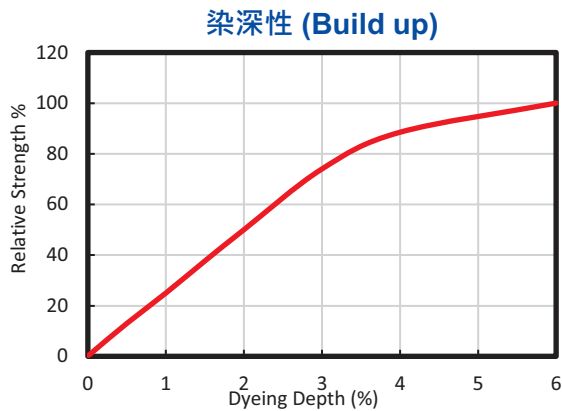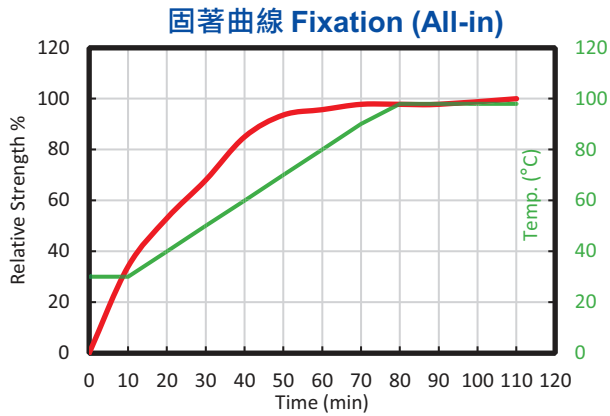

Everacid Blue N-AFN

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	4-5	4	2-3	5	5	3-4	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	3-4	3	3-4	2	5	5	2-3		50ppm		1
	ISO 105 C10C	1/1N	3	3	4	1-2	4-5	5	2		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	4	4	2-3	5	5	4	Saliva 耐唾液	1/1N	4-5	
Water 耐水		1/1N	4-5	5	5	3	4-5	5	4-5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	4-5	4	3	4-5	4-5	4	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	4-5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	4	4	3	4-5	4-5	4		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	4-5	4-5	3-4	5	5	3-4	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4	5	4	2	5	5	3-4		50ppm		3-4
	ISO 105 C10C	1/1N	3-4	3	4	1-2	4-5	5	2		100ppm		2
	ISO 105 C06 B2S	1/1N	5	4-5	4-5	3	5	5	4-5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	4	5	4-5	4	4-5	5	4-5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		3-4	4-5	4-5	3-4	4-5	4-5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4	5	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4	6
	1/12N	4-5	6		Alkali 鹼		4	6
	1/3N	4-5	6					
	1/1N	4-5	6					
	2/1N	5	> 6					

Everacid Blue N-RL

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.15%	0.30%	0.60%	1.20%	1.44%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Excellent 極佳
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Yellower 黃味
Solubility g/l 溶解度	90°C water	30 g/l
	90°C→25°C	10 g/l
Color constancy 色恆性	Tungsten lamp	R (B)
	TL84 lamp	R (B)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4
	Cu ²⁺ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	5
	Cotton 棉	3-4
	Nylon 尼龍	1
	Polyester 聚酯	4-5
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1
	Alkaline	1
	Neutral	1
Stripping 脫色性	Oxidation	4-5
	Reduction	1

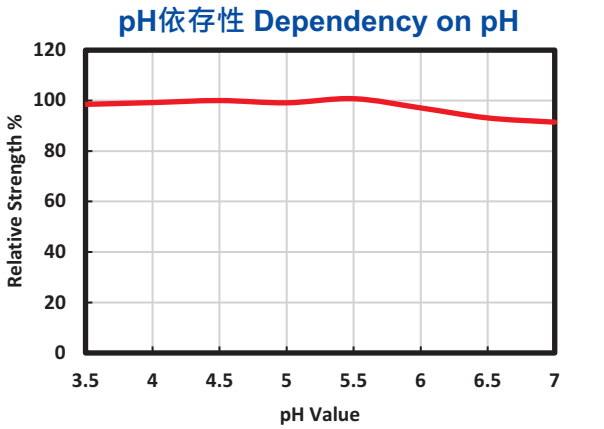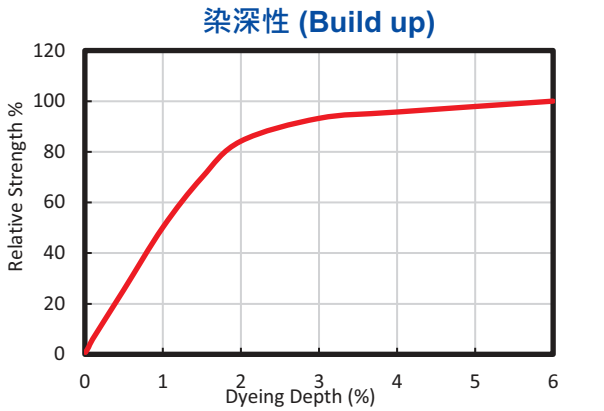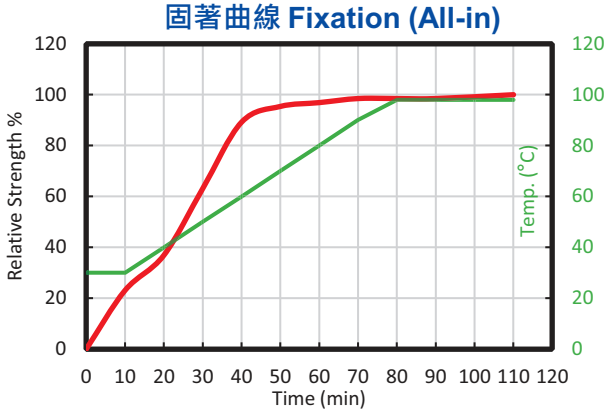

Everacid Blue N-RL

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	4-5	3	5	5	4	Chlorinated Water 耐氯水	20ppm	1/1 N	3-4
	ISO 105 C10B	1/1N	2-3	4-5	4-5	2-3	5	5	3-4		50ppm		1
	ISO 105 C10C	1/1N	2-3	4-5	4-5	2	4-5	5	2-3		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	5	5	3	5	5	4-5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	4	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	4	4-5	5	4-5	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	4-5	4	4-5	5	4-5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4	5	4-5	4	5	5	4	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	3-4	5	5	3	5	5	4-5		50ppm		4-5
	ISO 105 C10C	1/1N	3	4-5	4-5	2-3	4-5	5	3		100ppm		2-3
	ISO 105 C06 B2S	1/1N	4	5	5	4	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	4-5	4-5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4	5	5	4-5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4	6
	1/12N	4-5	6		Alkali 鹼		4	6
	1/3N	4-5	6					
	1/1N	4-5	> 6					
	2/1N	5	> 6					

Everacid Cyanine N-5R

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.06%	0.13%	0.25%	0.50%	1.00%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium to Large 中~大
Migration 移染性		Medium 中
Coverage of barré 橫條遮蓋性		Medium to Poor 中~差
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Same 相似
Solubility g/l 溶解度	90°C water	50 g/l
	90°C→25°C	50 g/l
Color constancy 色恆性	Tungsten lamp	R
	TL84 lamp	R (B)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4
	Cu ²⁺ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	5
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	5
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2-3
	Alkaline	2-3
	Neutral	2-3
Stripping 脫色性	Oxidation	3
	Reduction	1

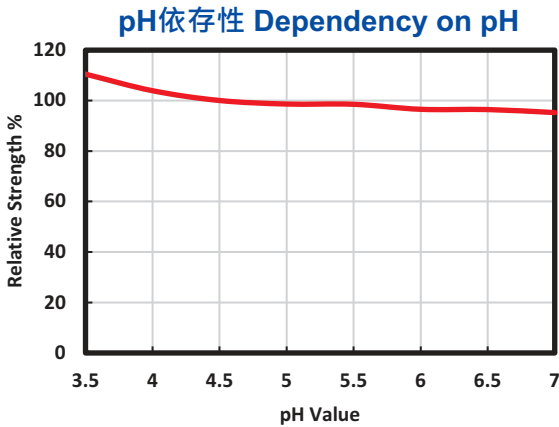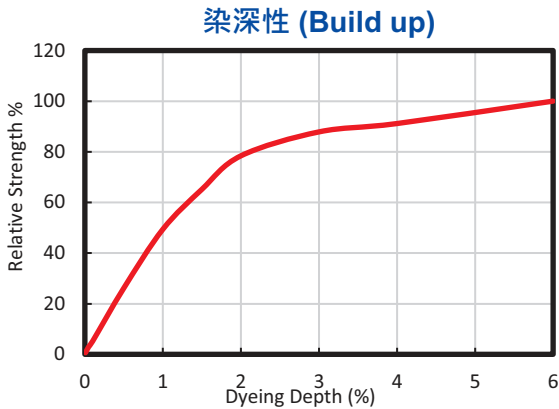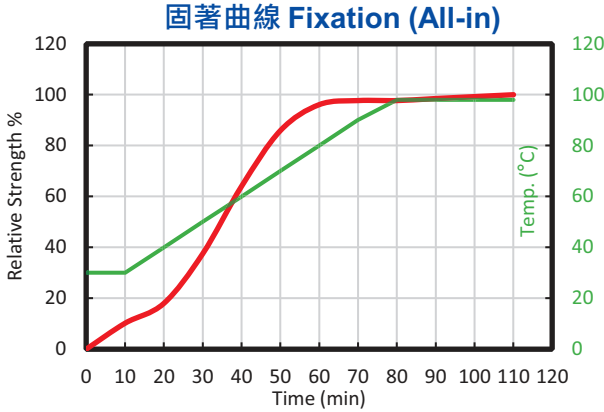

Everacid Cyanine N-5R

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色	
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item				
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	4-5	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	2-3	
	ISO 105 C10B	1/1N	3-4	5	4-5	4	5	5	5		50ppm		1	
	ISO 105 C10C	1/1N	4	5	4-5	4	4-5	5	4-5		100ppm		1	
	ISO 105 C06 B2S	1/1N	4-5	5	5	4-5	5	5	5	Saliva 耐唾液	1/1N	5		
Water 耐水		1/1N	4	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5	
Sea Water 耐海水		1/1N	5	4-5	5	4-5	4-5	4-5	4-5	Nitrogen Oxides 氣體變褪色		1/1N	3	
Perspiration 耐汗		Acid 酸	1/1N	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
		Alkali 鹼		4-5	5	5	4-5	5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4											
	After 4hr. 4小時後		5											

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	4-5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	5	5	5	5		50ppm		2-3
	ISO 105 C10C	1/1N	4-5	5	5	4-5	5	5	5		100ppm		1-2
	ISO 105 C06 B2S	1/1N	4-5	5	5	4-5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	3-4	4	Perspiration Light 耐汗日光	Acid 酸	1/1 N	3-4	4
	1/12N	3-4	4		Alkali 鹼		3	4
	1/3N	3-4	4-5					
	1/1N	3-4	5					
	2/1N	4-5	6					

Everacid Dark Green N-A

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.1%	0.2%	0.4%	0.8%	1.6%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium 中
Migration 移染性		Excellent 極佳
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon > Wool 尼龍 > 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Redder 紅味
Solubility g/l 溶解度	90°C water	50 g/l
	90°C→25°C	20 g/l
Color constancy 色恆性	Tungsten lamp	G (B)
	TL84 lamp	B
Metallic ions 金屬離子	Fe ²⁺ 鐵	1 R
	Cu ²⁺ 銅	1 R
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	2
	Acetate 醋酸	5
	Cotton 棉	4
	Nylon 尼龍	1
	Polyester 聚酯	5
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	3
	Alkaline	3
Stripping 脫色性	Neutral	3-4
	Oxidation	2-3
	Reduction	2

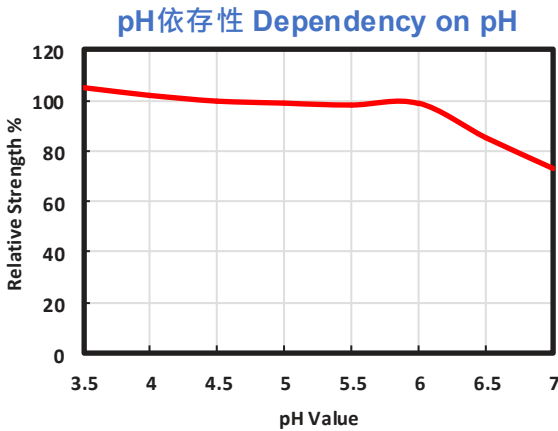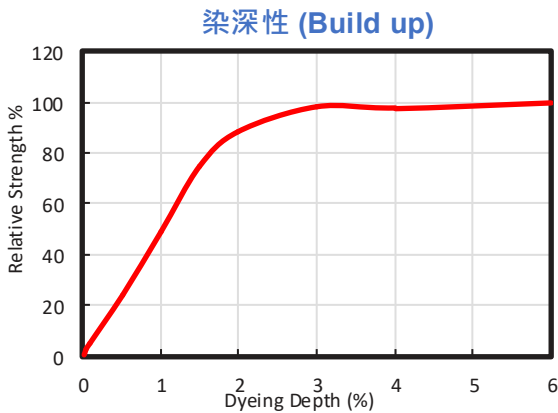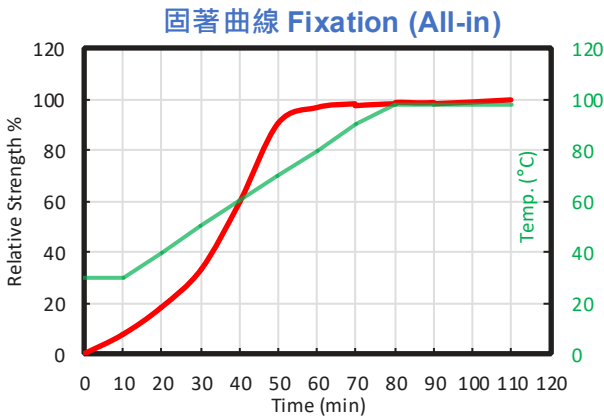

Everacid Dark Green N-A

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC 61-2A	1/1N	4	5	4-5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	1-2
	ISO 105 C10B	1/1N	3	5	4	5	5	5	5		50ppm		1
	ISO 105 C10C	1/1N	3	5	3-4	5	4-5	5	5		100ppm		1
	ISO 105 C06 B2S	1/1N	4	5	4-5	5	5	5	5	Saliva 耐唾液	1/1N	4	
Water 耐水		1/1N	3-4	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	4-5	3	3-4	4-5	4	4-5	Nitrogen Oxides 氣體變褪色		1/1N	3
Perspiration 耐汗	Acid 酸	1/1N	4	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4	5	3	4	5	5	4-5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC 61-2A	1/1N	4-5	5	4-5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	3
	ISO 105 C10B	1/1N	4-5	5	4-5	5	5	5	5		50ppm		1-2
	ISO 105 C10C	1/1N	4-5	5	4-5	5	5	5	5		100ppm		1-2
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		3-4	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	3	4	Perspiration Light 耐汗日光	Acid 酸	1/1 N	2-3	4
	1/12N	3	4-5		Alkali 鹼		3	4
	1/3N	3	4-5					
	1/1N	3-4	4-5					
	2/1N	4-5	6					

Everacid Blue Black N-10B

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.25%	0.50%	1.00%	2.00%	2.40%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Excellent 極佳
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Yellower 黃味
Solubility g/l 溶解度	90°C water	20 g/l
	90°C→25°C	20 g/l
Color constancy 色恆性	Tungsten lamp	R (B)
	TL84 lamp	R (B)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4-5
	Cu ²⁺ 銅	1
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1-2
	Acetate 醋酸纖維	5
	Cotton 棉	4
	Nylon 尼龍	1
	Polyester 聚酯	5
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	4
	Alkaline	4
	Neutral	3-4
Stripping 脫色性	Oxidation	4-5
	Reduction	2

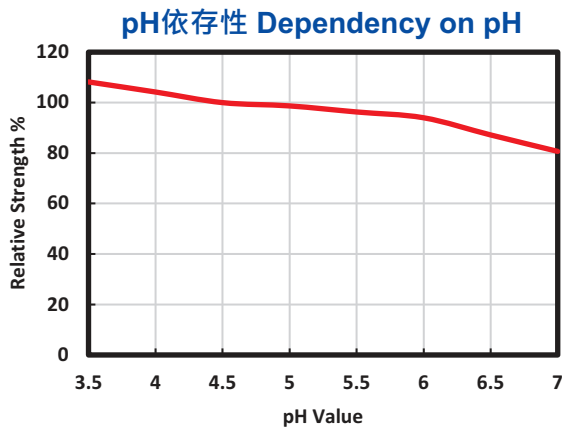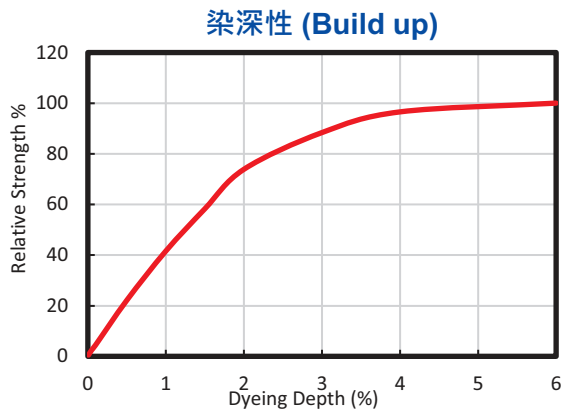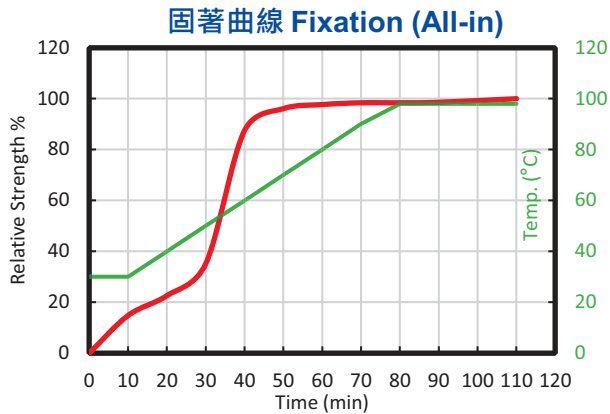

Everacid Blue Black N-10B

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	3-4	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	3	5	3	5	5	5	5		50ppm		2-3
	ISO 105 C10C	1/1N	3	5	3	5	5	5	5		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	5	3-4	5	5	5	5	Saliva 耐唾液	1/1N	2-3	
Water 耐水		1/1N	4-5	5	4-5	3-4	4-5	4-5	4	Bleeding 色泣牢度 (Daimru)		1/1N	3
Sea Water 耐海水		1/1N	4-5	4-5	2	2-3	3-4	3-4	3-4	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	5	5	4-5	4	4-5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	4	2	2	3-4	3-4	3		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	4-5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4	5	4-5	5	5	5	5		50ppm		4-5
	ISO 105 C10C	1/1N	4-5	5	4	5	5	5	5		100ppm		3
	ISO 105 C06 B2S	1/1N	4-5	5	4-5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	4-5	5	4-5	4-5	5	5	4-5	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment) 日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	1	2	Perspiration Light 耐汗日光	Acid 酸	1/1 N	2	3
	1/12N	1	2		Alkali 鹼		2	3
	1/3N	1	2-3					
	1/1N	2	3					
	2/1N	2	3-4					

Everacid Black LDN

Standard Depth	1/25 N	1/12 N	1/3 N	B/LK	B/DK
Dyeing Depth	0.16%	0.31%	0.63%	1.25%	2.50%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium 中
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Poor 差
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Redder 紅味
Solubility g/l 溶解度	90°C water	100 g/l
	90°C→25°C	100 g/l
Color constancy 色恆性	Tungsten lamp	R
	TL84 lamp	R (B)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4-5
	Cu ²⁺ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	5
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	5
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2-3
	Alkaline	3
	Neutral	2-3
Stripping 脫色性	Oxidation	5
	Reduction	1

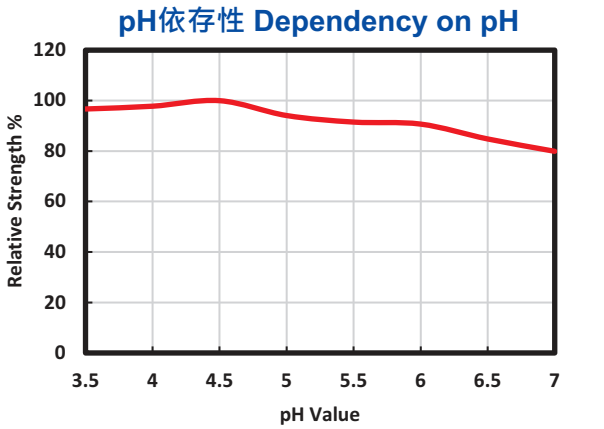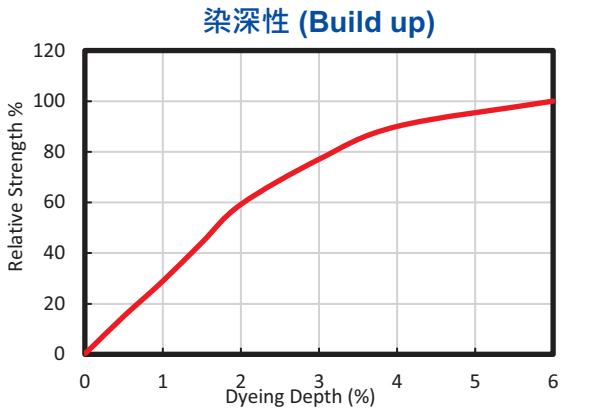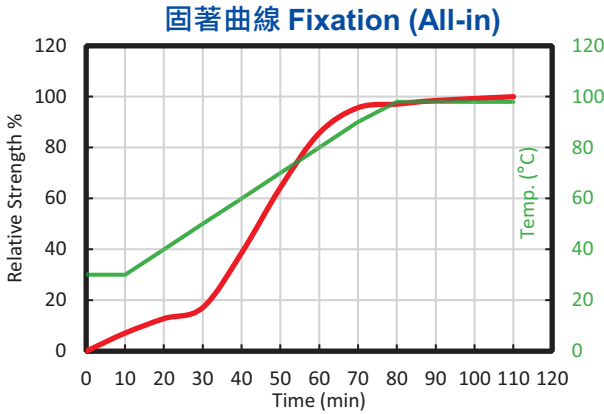

Everacid Black LDN

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	B/DK	4-5	5	5	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	B/DK	4-5
	ISO 105 C10B	B/DK	4-5	5	5	4	5	5	5		50ppm		2
	ISO 105 C10C	B/DK	4-5	5	5	3	5	5	4		100ppm		1
	ISO 105 C06 B2S	B/DK	4-5	5	5	4-5	5	5	5	Saliva 耐唾液	B/DK	5	
Water 耐水		B/DK	4-5	5	5	4-5	4-5	5	5	Bleeding 色泣牢度 (Daimru)		B/DK	4-5
Sea Water 耐海水		B/DK	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		B/DK	4-5
Perspiration 耐汗	Acid 酸	B/DK	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	B/DK	5
	Alkali 鹼		4-5	5	5	4-5	4-5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	B/DK	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	B/DK	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	B/DK	4-5
	ISO 105 C10B	B/DK	5	5	5	4-5	5	5	5		50ppm		4
	ISO 105 C10C	B/DK	5	5	5	4	5	5	5		100ppm		2-3
	ISO 105 C06 B2S	B/DK	5	5	5	4-5	5	5	5	Saliva 耐唾液		B/DK	5
Water 耐水		B/DK	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		B/DK	5
Sea Water 耐海水		B/DK	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		B/DK	5
Perspiration 耐汗	Acid 酸	B/DK	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	B/DK	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	6	Perspiration Light 耐汗日光	Acid 酸	B/DK	5	6
	1/12N	4-5	6		Alkali 鹼		5	6
	1/3N	4-5	6					
	B/LK	4-5	> 6					
	B/DK	5	> 6					

Everacid Black MR

Standard Depth	1/25 N	1/12 N	1/3 N	B/LK	B/DK
Dyeing Depth	0.13%	0.25%	0.50%	1.00%	2.00%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium 中
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Poor 差
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Redder 紅味
Solubility g/l 溶解度	90°C water	100 g/l
	90°C→25°C	100 g/l
Color constancy 色恆性	Tungsten lamp	R
	TL84 lamp	R (B)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4-5
	Cu ²⁺ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	5
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	5
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2-3
	Alkaline	3
	Neutral	2-3
Stripping 脫色性	Oxidation	5
	Reduction	4-5

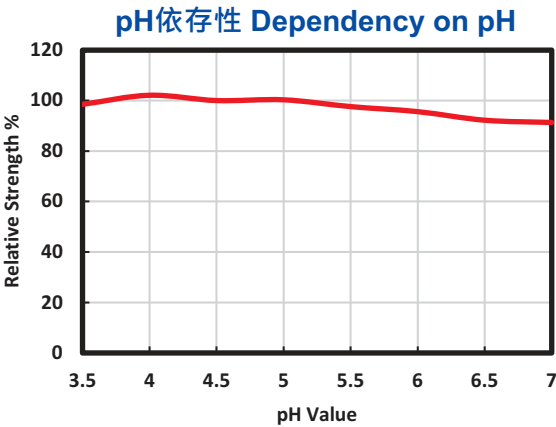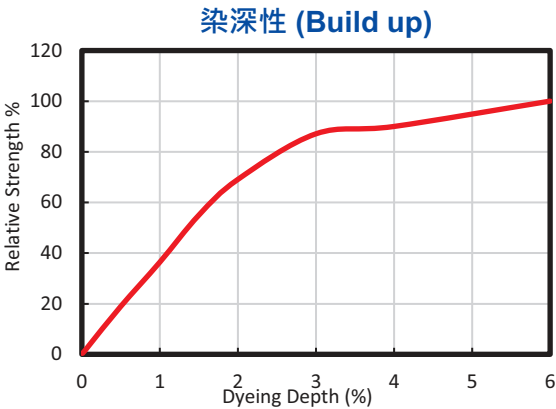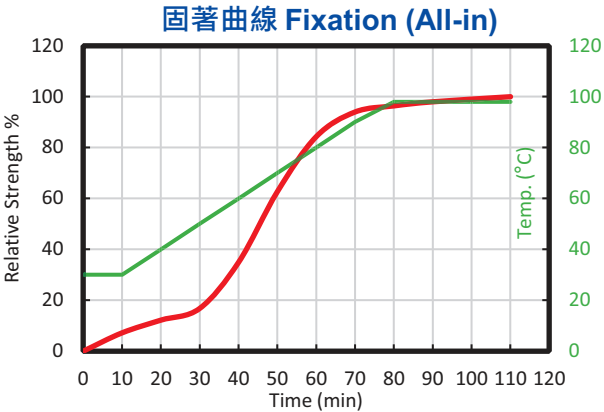

Everacid Black MR

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	B/DK	4-5	5	5	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	B/DK	4-5
	ISO 105 C10B	B/DK	4-5	5	5	4	5	5	5		50ppm		2
	ISO 105 C10C	B/DK	4-5	5	5	3	5	5	4		100ppm		1
	ISO 105 C06 B2S	B/DK	4-5	5	5	4-5	5	5	5	Saliva 耐唾液	B/DK	5	
Water 耐水		B/DK	4-5	5	5	4-5	4-5	5	5	Bleeding 色泣牢度 (Daimru)		B/DK	4-5
Sea Water 耐海水		B/DK	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		B/DK	4-5
Perspiration 耐汗	Acid 酸	B/DK	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	B/DK	5
	Alkali 鹼		4-5	5	5	4-5	4-5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	B/DK	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	B/DK	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	B/DK	4-5
	ISO 105 C10B	B/DK	5	5	5	4-5	5	5	5		50ppm		4-5
	ISO 105 C10C	B/DK	5	5	5	4	5	5	5		100ppm		3
	ISO 105 C06 B2S	B/DK	5	5	5	4-5	5	5	5	Saliva 耐唾液		B/DK	5
Water 耐水		B/DK	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		B/DK	5
Sea Water 耐海水		B/DK	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		B/DK	5
Perspiration 耐汗	Acid 酸	B/DK	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	B/DK	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	6	Perspiration Light 耐汗日光	Acid 酸	B/DK	5	6
	1/12N	4-5	6		Alkali 鹼		5	6
	1/3N	4-5	6					
	B/LK	4-5	> 6					
	B/DK	5	> 6					

Everacid Black LD

Standard Depth	1/25 N	1/12 N	1/3 N	B/LK	B/DK
Dyeing Depth	0.11%	0.23%	0.45%	0.90%	1.80%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium 中
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Poor 差
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Redder 紅味
Solubility g/l 溶解度	90°C water	100 g/l
	90°C→25°C	100 g/l
Color constancy 色恆性	Tungsten lamp	R
	TL84 lamp	R (B)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4-5
	Cu ²⁺ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	5
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	5
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2-3
	Alkaline	3
	Neutral	2-3
Stripping 脫色性	Oxidation	5
	Reduction	4-5

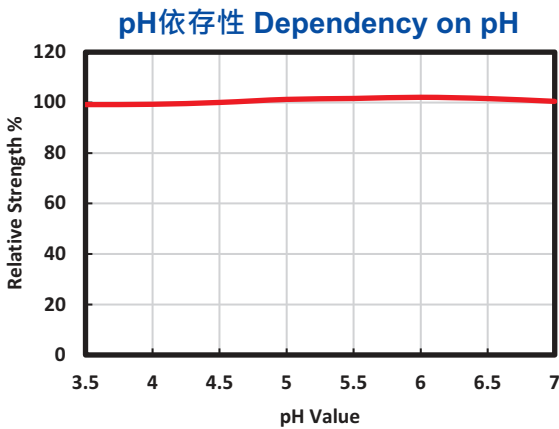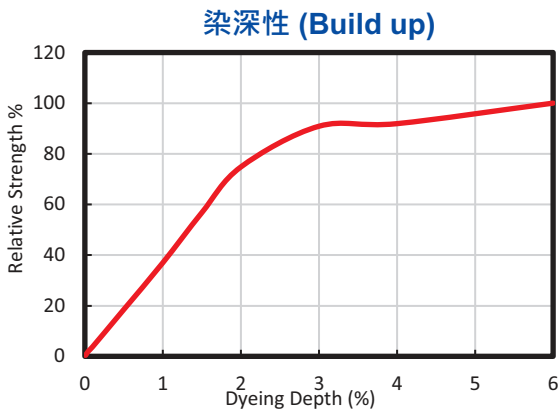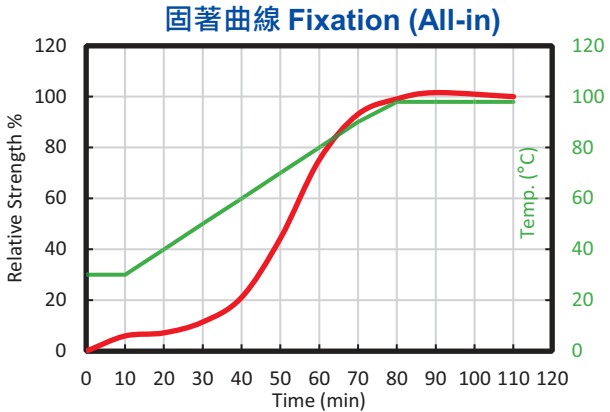

Everacid Black LD

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	B/DK	4-5	5	5	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	B/DK	4-5
	ISO 105 C10B	B/DK	4-5	5	5	4	5	5	5		50ppm		2
	ISO 105 C10C	B/DK	4-5	5	5	3	5	5	4		100ppm		1
	ISO 105 C06 B2S	B/DK	4-5	5	5	4-5	5	5	5	Saliva 耐唾液	B/DK	5	
Water 耐水		B/DK	4-5	5	5	4-5	4-5	5	5	Bleeding 色泣牢度 (Daimru)		B/DK	4-5
Sea Water 耐海水		B/DK	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		B/DK	4-5
Perspiration 耐汗	Acid 酸	B/DK	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	B/DK	5
	Alkali 鹼		4-5	5	5	4-5	4-5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	B/DK	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	B/DK	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	B/DK	5
	ISO 105 C10B	B/DK	5	5	5	4-5	5	5	5		50ppm		4
	ISO 105 C10C	B/DK	5	5	5	4	5	5	5		100ppm		2-3
	ISO 105 C06 B2S	B/DK	5	5	5	4-5	5	5	5	Saliva 耐唾液		B/DK	5
Water 耐水		B/DK	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		B/DK	5
Sea Water 耐海水		B/DK	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		B/DK	5
Perspiration 耐汗	Acid 酸	B/DK	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	B/DK	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	6	Perspiration Light 耐汗日光	Acid 酸	B/DK	5	6
	1/12N	4-5	6		Alkali 鹼		5	6
	1/3N	4-5	6					
	B/LK	4-5	> 6					
	B/DK	5	> 6					

Everacid Black ACE

Standard Depth	1/25 N	1/12 N	1/3 N	B/LK	B/DK
Dyeing Depth	0.15%	0.30%	0.60%	1.20%	2.40%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium 中
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	80 g/l
	90°C→25°C	80 g/l
Color constancy 色恆性	Tungsten lamp	R
	TL84 lamp	R (B)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4-5
	Cu ²⁺ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1-2
	Acetate 醋酸纖維	4
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	3
	Wool 羊毛	2
Discharge ability 拔染性	Decrolin	1-2
	Alkaline	2-3
	Neutral	2
Stripping 脫色性	Oxidation	4-5
	Reduction	3

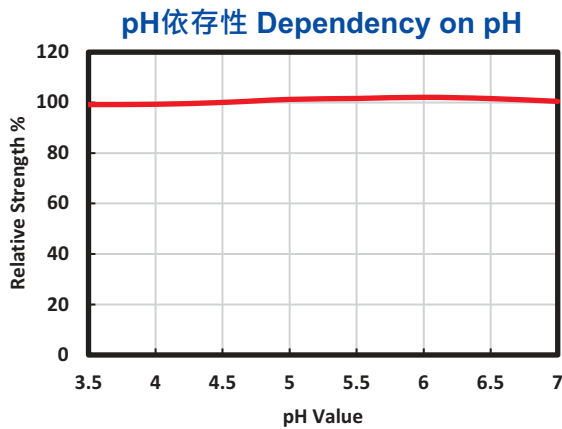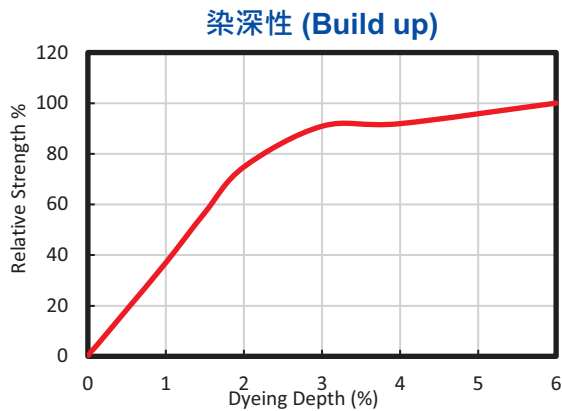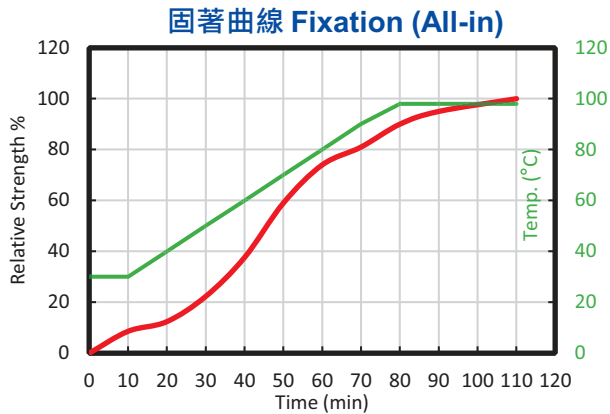

Everacid Black ACE

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	B/DK	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	B/DK	4-5
	ISO 105 C10B	B/DK	4-5	5	5	4-5	5	5	5		50ppm		2-3
	ISO 105 C10C	B/DK	4-5	5	5	4-5	5	5	4-5		100ppm		1
	ISO 105 C06 B2S	B/DK	4-5	5	5	5	5	5	5	Saliva 耐唾液	B/DK	5	
Water 耐水		B/DK	4-5	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		B/DK	4-5
Sea Water 耐海水		B/DK	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		B/DK	4
Perspiration 耐汗	Acid 酸	B/DK	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	B/DK	4-5
	Alkali 鹼		4-5	5	5	4-5	5	5	5		Wet 濕		4
Hot pressing 耐熱壓	Immediately 立即	B/DK	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	B/DK	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	B/DK	5
	ISO 105 C10B	B/DK	5	5	5	5	5	5	5		50ppm		4-5
	ISO 105 C10C	B/DK	5	5	5	5	5	5	5		100ppm		3-4
	ISO 105 C06 B2S	B/DK	5	5	5	5	5	5	5	Saliva 耐唾液		B/DK	5
Water 耐水		B/DK	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		B/DK	5
Sea Water 耐海水		B/DK	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		B/DK	4-5
Perspiration 耐汗	Acid 酸	B/DK	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	B/DK	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		4-5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)

Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4	5-6	Perspiration Light 耐汗日光	Acid 酸	B/DK	5	6
	1/12N	4	5-6		Alkali 鹼		4-5	6
	1/3N	4-5	6					
	B/LK	5	> 6					
	B/DK	5	> 6					


Everacid Black S-MF

Standard Depth	1/25 N	1/12 N	1/3 N	B/LK	B/DK
Dyeing Depth	0.11%	0.23%	0.45%	0.9%	1.8%


Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium 中
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Excellent 極佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon>>Wool 尼龍>>羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Redder 紅味
Solubility g/l 溶解度	90°C water	100 g/l
	90°C→25°C	80 g/l
Color constancy 色恆性	Tungsten lamp	G (Y)
	TL84 lamp	G (B)
Metallic ions 金屬離子	Fe 2+ 鐵	5
	Cu 2+ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸	2-3
	Cotton 棉	1-2
	Nylon 尼龍	1
	Polyester 聚酯	2
	Acrylic 壓克力	2
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2
	Alkaline	2-3
	Neutral	2-3
Stripping 脫色性	Oxidation	5
	Reduction	4-5


固著曲線 Fixation (All-in)

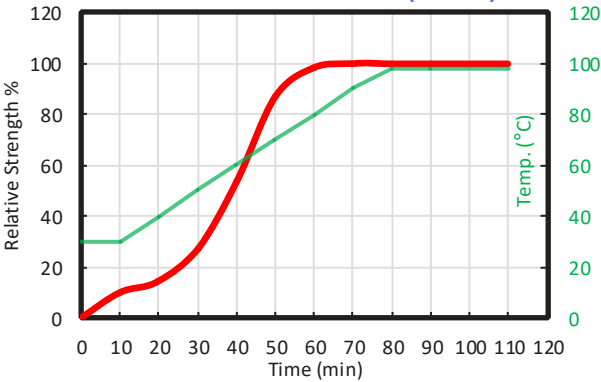

染深性 (Build up)

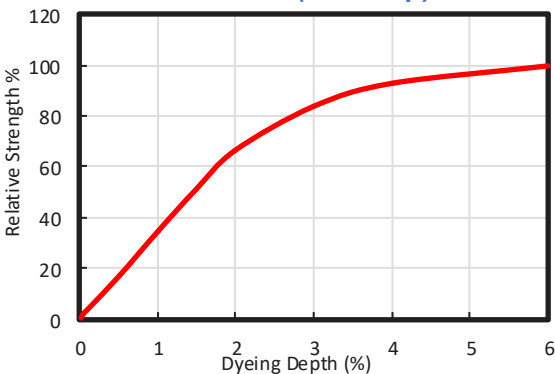

pH依存性 Dependency on pH

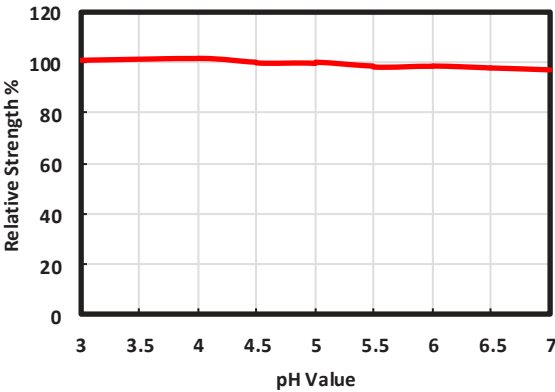

Everacid Black S-MF

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC 61-2A	B/DK	4-5	4-5	2-3	2-3	4-5	4-5	4	Chlorinated Water 耐氯水	20ppm	B/DK	4
	ISO 105 C10B	B/DK	4-5	4-5	3-4	3	5	5	4-5		50ppm		1-2
	ISO 105 C10C	B/DK	4	4-5	3	2	4-5	4-5	3-4		100ppm		1
	ISO 105 C06 B2S	B/DK	4-5	4-5	4-5	4	5	5	5	Saliva 耐唾液	B/DK	4-5	
Water 耐水		B/DK	5	4-5	4	4	4-5	5	4-5	Bleeding 色泣牢度 (Daimru)		B/DK	5
Sea Water 耐海水		B/DK	4-5	3-4	3-4	2	4	4-5	3-4	Nitrogen Oxides 氣體變褪色		B/DK	5
Perspiration 耐汗	Acid 酸	B/DK	4-5	4	4	2-3	4-5	4-5	3-4	Rubbing 耐摩擦	Dry 乾	B/DK	5
	Alkali 鹼		4-5	2-3	2-3	2	3-4	4	2-3		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	B/DK	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC 61-2A	B/DK	5	5	3-4	3-4	5	5	4-5	Chlorinated Water 耐氯水	20ppm	B/DK	4-5
	ISO 105 C10B	B/DK	4-5	5	4-5	4	5	5	5		50ppm		3
	ISO 105 C10C	B/DK	4-5	4-5	4	3	5	5	4		100ppm		2
	ISO 105 C06 B2S	B/DK	4-5	5	5	4-5	5	5	5	Saliva 耐唾液		B/DK	4-5
Water 耐水		B/DK	5	5	4-5	4-5	4-5	5	5	Bleeding 色泣牢度 (Daimru)		B/DK	5
Sea Water 耐海水		B/DK	4-5	4-5	4-5	4	4-5	4-5	4-5	Nitrogen Oxides 氣體變褪色		B/DK	4-5
Perspiration 耐汗	Acid 酸	B/DK	5	4-5	4-5	4	5	5	4-5	Rubbing 耐摩擦	Dry 乾	B/DK	5
	Alkali 鹼		5	4-5	4	4	4	4-5	4-5		Wet 濕		5

Light Fastness (Without Fixing Treatment)

日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4	5-6	Perspiration Light 耐汗日光	Acid 酸	B/DK	4-5	>6
	1/12N	4	5-6		Alkali 鹼		4-5	>6
	1/3N	4	6					
	B/LK	4	6					
	B/DK	5	>6					

Everacid Yellow S-7G

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.23%	0.45%	0.90%	1.80%	2.16%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Medium 中
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Redder 紅味
Solubility g/l 溶解度	90°C water	90 g/l
	90°C→25°C	70 g/l
Color constancy 色恆性	Tungsten lamp	Y (G)
	TL84 lamp	Y (R)
Metallic ions 金屬離子	Fe ²⁺ 鐵	2
	Cu ²⁺ 銅	1
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1-2
	Acetate 醋酸纖維	3-4
	Cotton 棉	3-4
	Nylon 尼龍	1
	Polyester 聚酯	5
	Acrylic 壓克力	3-4
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1
	Alkaline	4
	Neutral	1
Stripping 脫色性	Oxidation	4-5
	Reduction	1

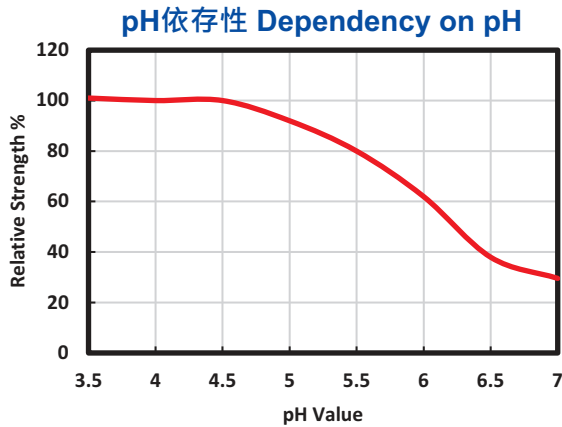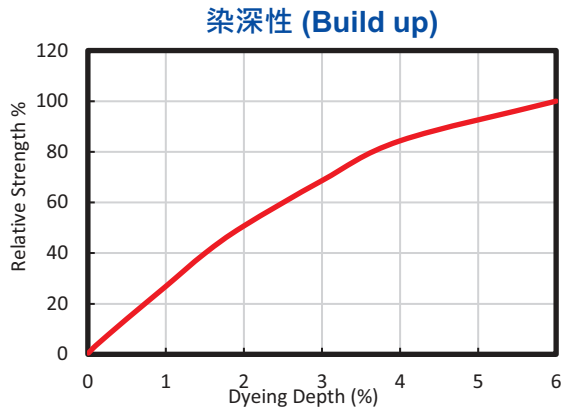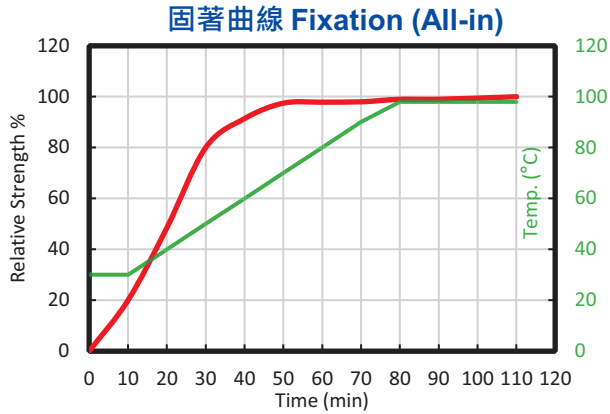

Everacid Yellow S-7G

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4	5	4-5	4-5	5	5	4	Chlorinated Water 耐氯水	20ppm	1/1 N	3-4
	ISO 105 C10B	1/1N	4	4-5	4	4-5	5	5	3		50ppm		1-2
	ISO 105 C10C	1/1N	3-4	5	5	5	5	5	5		100ppm		1
	ISO 105 C06 B2S	1/1N	4	5	5	5	5	5	5	Saliva 耐唾液	1/1N	2	
Water 耐水		1/1N	4-5	4-5	4-5	2-3	5	5	4-5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	3	1-2	1-2	1-2	4	4	2	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	3-4	3	3	2-3	4-5	4-5	3	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		3	2	1-2	1-2	4	3-4	2		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4	5	4-5	5	5	5	5		50ppm		2-3
	ISO 105 C10C	1/1N	3	5	5	5	5	5	4		100ppm		2
	ISO 105 C06 B2S	1/1N	4	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	3	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	3-4	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		3	5	5	4-5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)

Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	2	2-3	Perspiration Light 耐汗日光	Acid 酸	1/1 N	2-3	2
	1/12N	2-3	3		Alkali 鹼		2-3	2
	1/3N	3	3-4					
	1/1N	3	4					
	2/1N	3	4					


Everacid Yellow S-4GL

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.14%	0.28%	0.55%	1.10%	1.32%


Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 低
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	50 g/l
	90°C→25°C	40 g/l
Color constancy 色恆性	Tungsten lamp	Y (R)
	TL84 lamp	Y (G)
Metallic ions 金屬離子	Fe ²⁺ 鐵	3-4
	Cu ²⁺ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4-5
	Cotton 棉	4
	Nylon 尼龍	1
	Polyester 聚酯	4
	Acrylic 壓克力	4
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1-2
	Alkaline	1-2
	Neutral	1-2
Stripping 脫色性	Oxidation	5
	Reduction	4-5


固著曲線 Fixation (All-in)

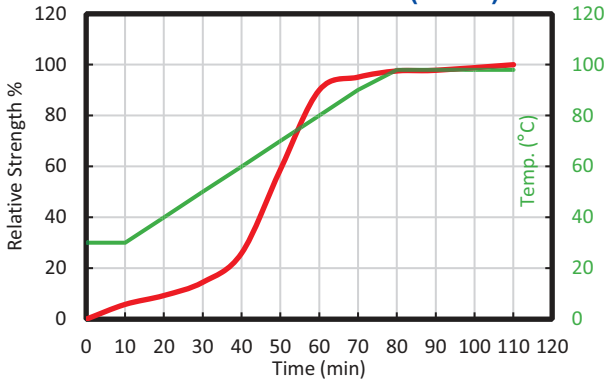

染深性 (Build up)

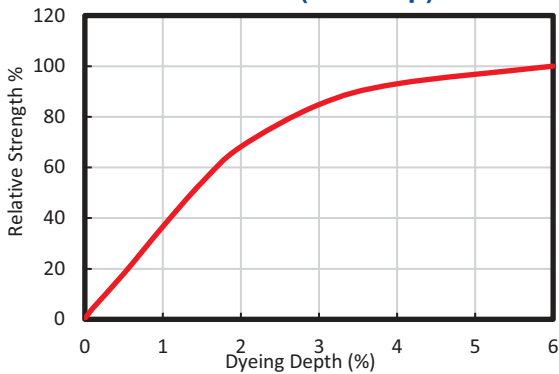

pH依存性 Dependency on pH

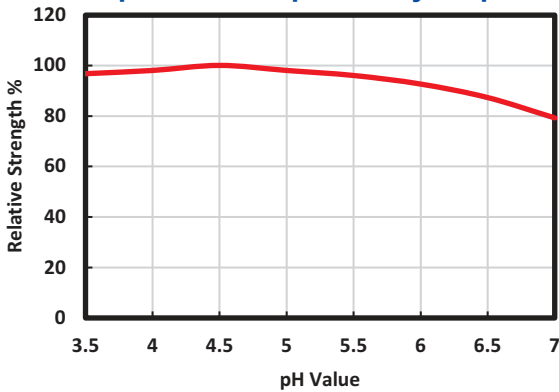

Everacid Yellow S-4GL

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		2
	ISO 105 C10C	1/1N	4-5	5	5	5	5	5	4-5		100ppm		1
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	4-5	5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		4
	ISO 105 C10C	1/1N	5	5	5	5	5	5	5		100ppm		3
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)

日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	> 6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	> 6
	1/12N	5	> 6		Alkali 鹼		4-5	> 6
	1/3N	5	> 6					
	1/1N	5	> 6					
	2/1N	5	> 6					

Everacid Orange S-GSN

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.21%	0.43%	0.85%	1.70%	2.04%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium 中
Migration 移染性		Poor 低
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon > Wool 尼龍 > 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Redder 紅味
Solubility g/l 溶解度	90°C water	70 g/l
	90°C→25°C	70 g/l
Color constancy 色恆性	Tungsten lamp	Y (R)
	TL84 lamp	Y (R)
Metallic ions 金屬離子	Fe 2+ 鐵	5
	Cu 2+ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4-5
	Cotton 棉	3-4
	Nylon 尼龍	1
	Polyester 聚酯	4
	Acrylic 壓克力	4
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	3
	Alkaline	3
	Neutral	2-3
Stripping 脫色性	Oxidation	5
	Reduction	3-4

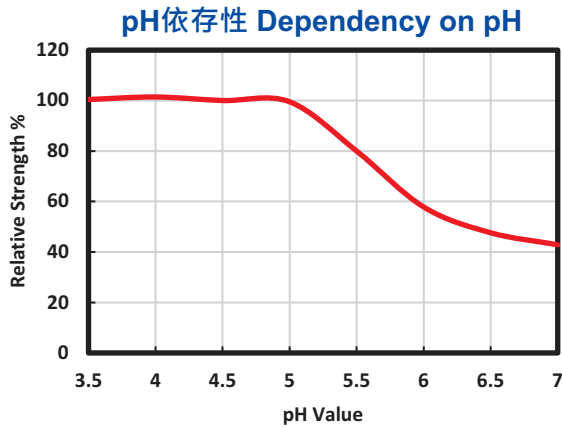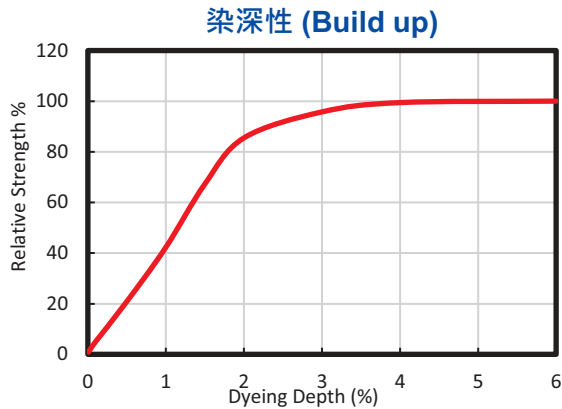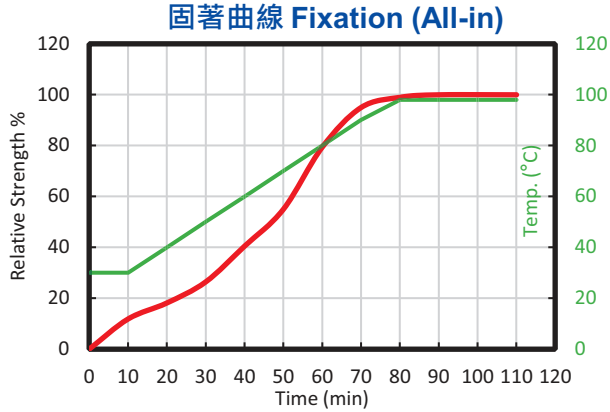

Everacid Orange S-GSN

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	4-5	5	5	5	5	5	5		50ppm		4
	ISO 105 C10C	1/1N	4-5	5	5	5	5	5	5		100ppm		2
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	4	4	4	4-5	4	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	4-5	4	4-5	5	4-5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	4	4	4-5	4	4	3-4		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	3										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		5
	ISO 105 C10C	1/1N	5	5	5	5	5	5	5		100ppm		4-5
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	> 6
	1/12N	4-5	6		Alkali 鹼		4-5	> 6
	1/3N	4-5	> 6					
	1/1N	5	> 6					
	2/1N	5	> 6					

Everacid Red S-GS

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.1%	0.2%	0.4%	0.8%	1.6%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium 中
Migration 移染性		Poor 低
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Redder 紅味
Solubility g/l 溶解度	90°C water	30 g/l
	90°C→25°C	10 g/l
Color constancy 色恆性	Tungsten lamp	R (Y)
	TL84 lamp	R (Y)
Metallic ions 金屬離子	Fe 2+ 鐵	4
	Cu 2+ 銅	3-4
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	3
	Cotton 棉	2
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2-3
	Alkaline	2
	Neutral	2
Stripping 脫色性	Oxidation	5
	Reduction	4-5

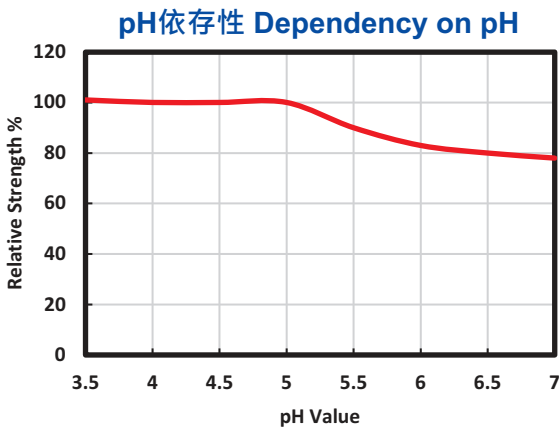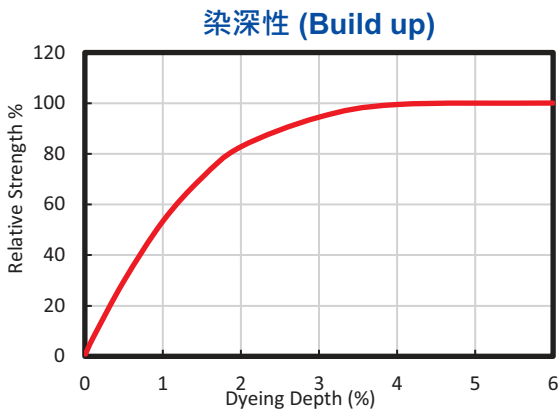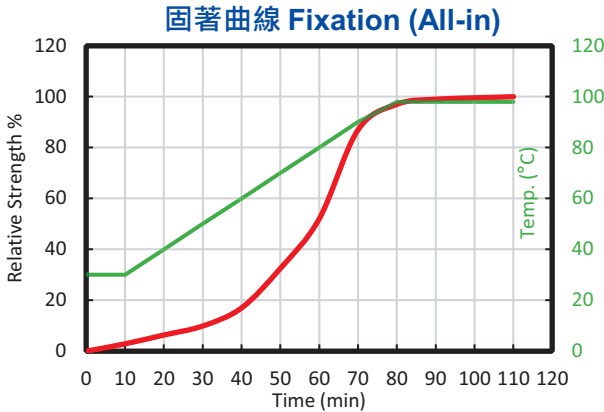

Everacid Red S-GS

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	3-4	5	3	3	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	3-4	5	4	4	5	5	5		50ppm		2-3
	ISO 105 C10C	1/1N	3-4	5	3-4	3-4	4-5	5	4-5		100ppm		2
	ISO 105 C06 B2S	1/1N	4	5	4-5	4-5	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	4	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4
Perspiration 耐汗	Acid 酸	1/1N	3-4	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	4-5
	Alkali 鹼		3-4	5	5	5	5	5	5		Wet 濕		4-5
Hot pressing 耐熱壓	Immediately 立即	1/1N	3										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	4-5	5	5	5	5	5	5		50ppm		4-5
	ISO 105 C10C	1/1N	4-5	5	5	5	5	5	5		100ppm		4
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	> 4-5
	Alkali 鹼		4-5	5	4-5	4-5	4-5	4-5	5		Wet 濕		4-5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	2-3	4	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	6
	1/12N	3	4-5		Alkali 鹼		4-5	6
	1/3N	3-4	5					
	1/1N	4	6					
	2/1N	4-5	6					

Everacid Red S-3B

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.12%	0.23%	0.45%	0.90%	1.80%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 低
Coverage of barré 橫條遮蓋性		Medium 中
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon > Wool 尼龍 > 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Bluer 藍味
Solubility g/l 溶解度	90°C water	30 g/l
	90°C→25°C	5 g/l
Color constancy 色恆性	Tungsten lamp	R (Y)
	TL84 lamp	R (B)
Metallic ions 金屬離子	Fe 2+ 鐵	4-5
	Cu 2+ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	4
	Acrylic 壓克力	4
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	3-4
	Alkaline	1-2
Stripping 脫色性	Neutral	2
	Oxidation	4-5
	Reduction	2-3

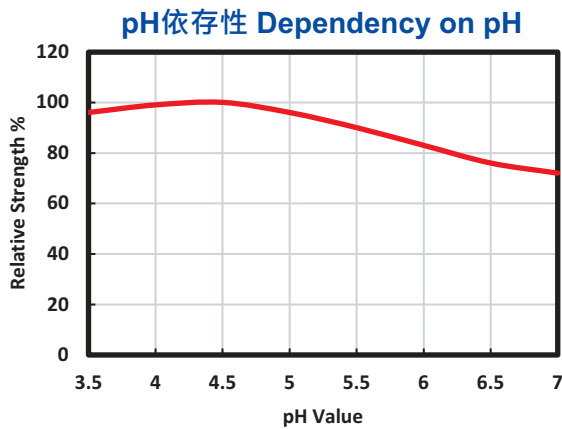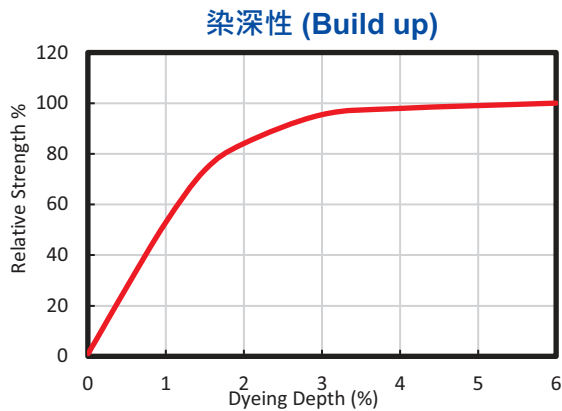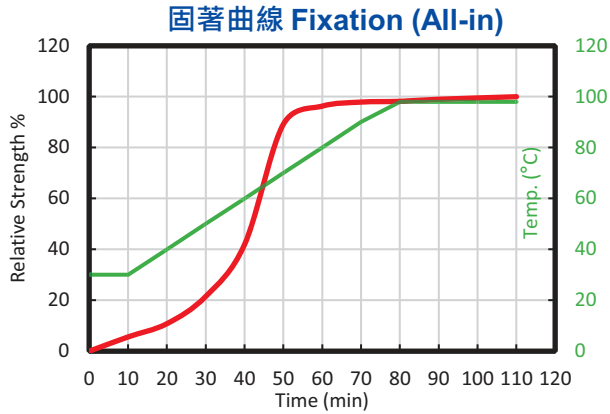

Everacid Red S-3B

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4	5	3-4	5	5	5	5	Chlorinated Water 耐氯水	20ppm		5
	ISO 105 C10B	1/1N	4-5	5	2	4-5	5	5	3-4		50ppm	1/1 N	4-5
	ISO 105 C10C	1/1N	4	5	2-3	4-5	5	5	2		100ppm		2
	ISO 105 C06 B2S	1/1N	4-5	5	3-4	5	5	5	5	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	4-5	4	4-5	4-5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼	1/1N	4-5	4-5	2-3	2-3	3-4	3-4	4-5		Wet 濕	1/1N	5
Hot pressing 耐熱壓	Immediately 立即	1/1N	3										
	After 4hr. 4小時後	1/1N	5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm		5
	ISO 105 C10B	1/1N	4-5	5	5	5	5	5	5		50ppm	1/1 N	4-5
	ISO 105 C10C	1/1N	4-5	5	4-5	5	5	5	4		100ppm		4
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼	1/1N	5	5	5	5	5	5	5		Wet 濕	1/1N	5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	2-3	3-4	Perspiration Light 耐汗日光	Acid 酸	1/1 N	3-4	4-5
	1/12N	2-3	4		Alkali 鹼		3-4	4-5
	1/3N	3	4-5					
	1/1N	3-4	5					
	2/1N	4	5-6					

Everacid Red S-BL

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.1%	0.2%	0.4%	0.8%	1.6%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Bluer 藍味
Solubility g/l 溶解度	90°C water	60 g/l
	90°C→25°C	30 g/l
Color constancy 色恆性	Tungsten lamp	Y
	TL84 lamp	Y (G)
Metallic ions 金屬離子	Fe ²⁺ 鐵	5
	Cu ²⁺ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2-3
	Alkaline	2-3
	Neutral	2-3
Stripping 脫色性	Oxidation	5
	Reduction	4

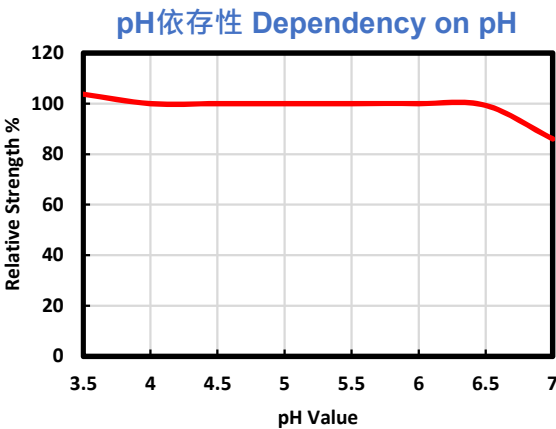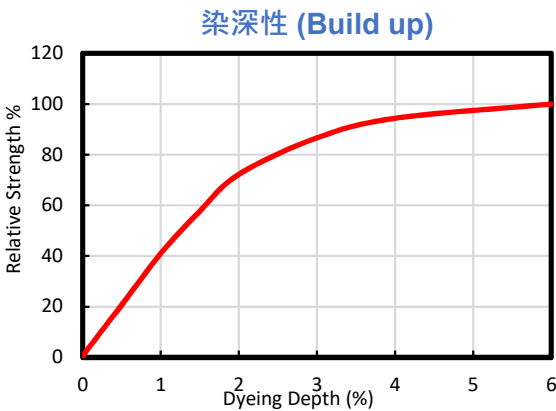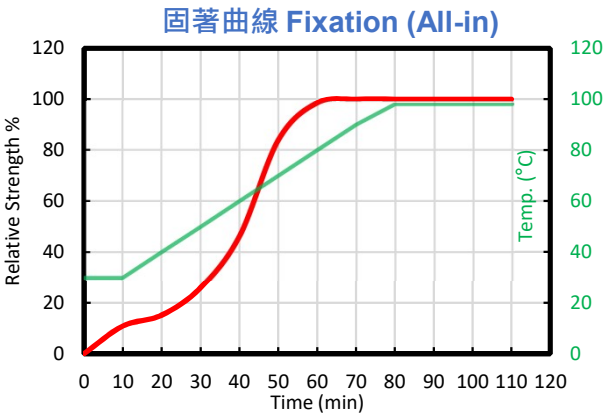

Everacid Red S-BL

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染							Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item				
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	4-5	4	4-5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	5	
	ISO 105 C10B	1/1N	5	5	5	4-5	4-5	5	5		50ppm		1-2	
	ISO 105 C10C	1/1N	4-5	5	5	4	4-5	5	4-5		100ppm		1	
	ISO 105 C06 B2S	1/1N	5	5	5	4-5	5	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5	
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5	
Perspiration 耐汗	Acid 酸	1/1N	5	5	4-5	4	4-5	4-5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5	
	Alkali 鹼		5	5	5	4-5	5	5	5		Wet 濕		5	
Hot pressing 耐熱壓	Immediately 立即	1/1N	4											
	After 4hr. 4小時後		5											

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		3-4
	ISO 105 C10C	1/1N	5	5	5	5	5	5	5		100ppm		3
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)

Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4	4	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	6
	1/12N	4	5		Alkali 鹼		4-5	6
	1/3N	4-5	5-6					
	1/1N	4-5	6					
	2/1N	5	> 6					


Everacid Rhodamine S-BN

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.04%	0.08%	0.15%	0.30%	0.60%


Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Medium 中
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon < Wool 尼龍 < 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Bluer 藍味
Solubility g/l 溶解度	90°C water	20 g/l
	90°C→25°C	20 g/l
Color constancy 色恆性	Tungsten lamp	Y (G)
	TL84 lamp	Y (G)
Metallic ions 金屬離子	Fe 2+ 鐵	4-5
	Cu 2+ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	5
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	5
	Acrylic 壓克力	4-5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1
	Alkaline	3-4
	Neutral	1
Stripping 脫色性	Oxidation	3-4
	Reduction	1-2


固著曲線 Fixation (All-in)

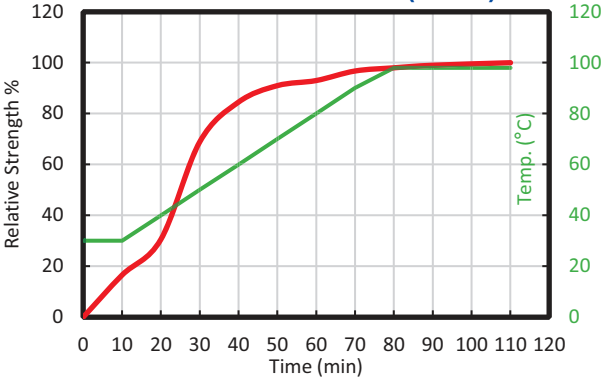

染深性 (Build up)

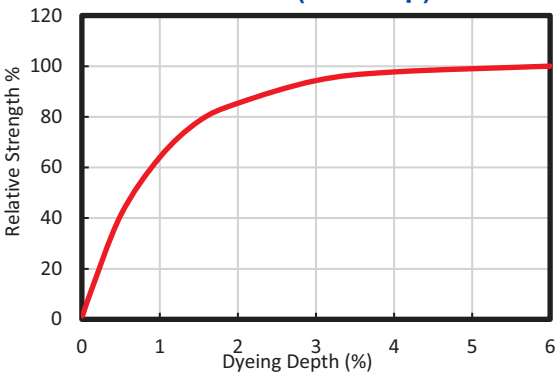

pH依存性 Dependency on pH

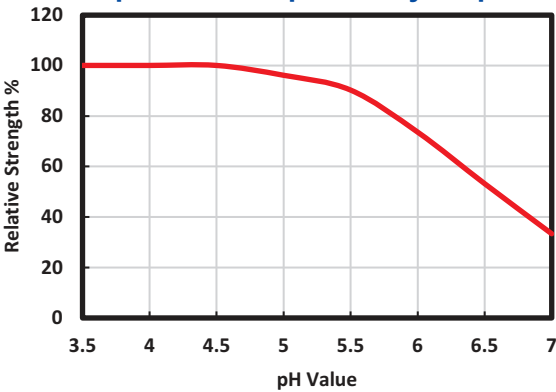

Everacid Rhodamine S-BN

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	2
	ISO 105 C10B	1/1N	4	5	5	5	5	5	4-5		50ppm		1
	ISO 105 C10C	1/1N	3	5	5	5	5	5	4		100ppm		1
	ISO 105 C06 B2S	1/1N	4	5	5	5	5	5	5	Saliva 耐唾液	1/1N	2	
Water 耐水		1/1N	4-5	5	5	3	5	5	4-5	Bleeding 色泣牢度 (Daimru)		1/1N	3
Sea Water 耐海水		1/1N	2-3	2	1	2	2	2	1	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	2-3	3	1-2	2	3	3	1-2	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		2-3	2	1	2	2	2	1		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	3-4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	2	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	2	5	5	5	5	5	5		50ppm		1
	ISO 105 C10C	1/1N	2	5	5	5	5	5	4-5		100ppm		1
	ISO 105 C06 B2S	1/1N	2-3	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	2-3	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		2	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)

日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	1	2	Perspiration Light 耐汗日光	Acid 酸	1/1 N	2	2
	1/12N	1	2		Alkali 鹼		2	2
	1/3N	1-2	2					
	1/1N	2	2					
	2/1N	2	2					

Everacid Violet S-RWN

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.23%	0.45%	0.90%	1.80%	2.16%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon > Wool 尼龍 > 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Bluer 藍味
Solubility g/l 溶解度	90°C water	90 g/l
	90°C→25°C	40 g/l
Color constancy 色恆性	Tungsten lamp	G (Y)
	TL84 lamp	B (G)
Metallic ions 金屬離子	Fe 2+ 鐵	5
	Cu 2+ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4-5
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	4-5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1-2
	Alkaline	1
	Neutral	2-3
Stripping 脫色性	Oxidation	4-5
	Reduction	3

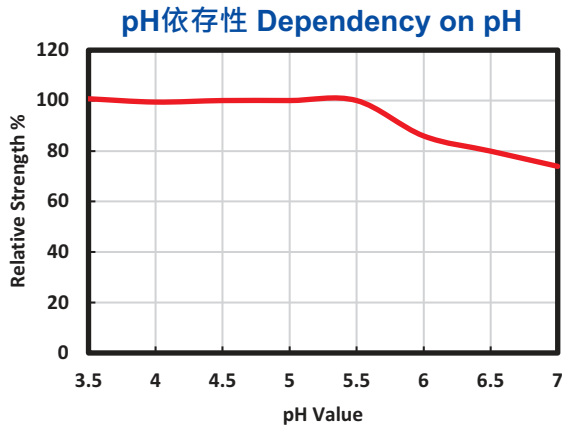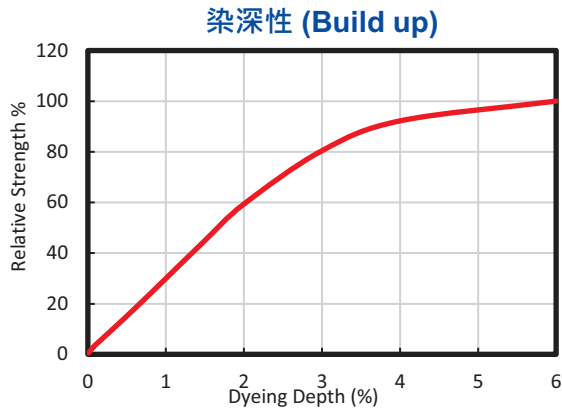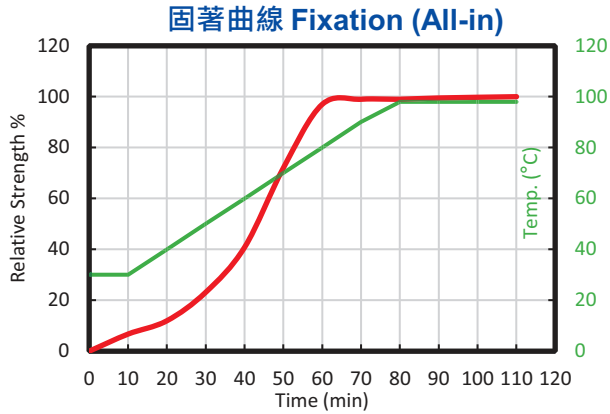

Everacid Violet S-RWN

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	4-5	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	5	5	5	4-5		50ppm		1
	ISO 105 C10C	1/1N	4	5	5	4-5	5	5	3		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	5	5	5	4	4-5	5	4	Bleeding 色泣牢度 (Daimru)		1/1N	4
Sea Water 耐海水		1/1N	5	5	4	3-4	4	5	4-5	Nitrogen Oxides 氣體變褪色		1/1N	2-3
Perspiration 耐汗	Acid 酸	1/1N	5	5	4-5	3-4	4	5	4-5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	2-3	2-3	2-3	3-4	4		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		3
	ISO 105 C10C	1/1N	5	5	5	5	5	5	5		100ppm		2-3
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	3-4
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	> 6
	1/12N	4-5	> 6		Alkali 鹼		4-5	> 6
	1/3N	4-5	> 6					
	1/1N	5	> 6					
	2/1N	5	> 6					

Everacid Blue S-BLW

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.38%	0.75%	1.50%	3.00%	3.60%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium to Large 中~大
Migration 移染性		Medium to Poor 中~差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon < Wool 尼龍 < 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Redder 紅味
Solubility g/l 溶解度	90°C water	40 g/l
	90°C→25°C	30 g/l
Color constancy 色恆性	Tungsten lamp	B (G)
	TL84 lamp	B (R)
Metallic ions 金屬離子	Fe ²⁺ 鐵	5
	Cu ²⁺ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4-5
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	3-4
	Acrylic 壓克力	4
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1
	Alkaline	1
	Neutral	1
Stripping 脫色性	Oxidation	5
	Reduction	2

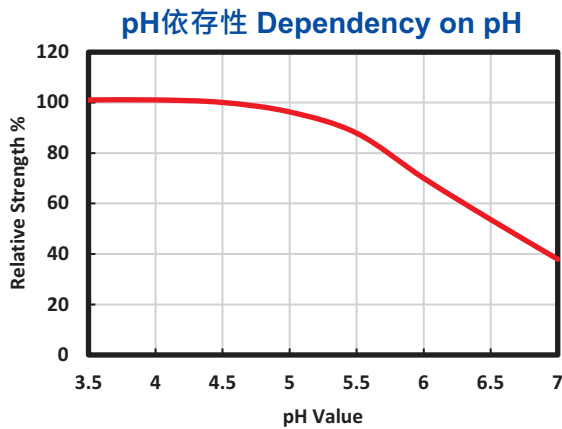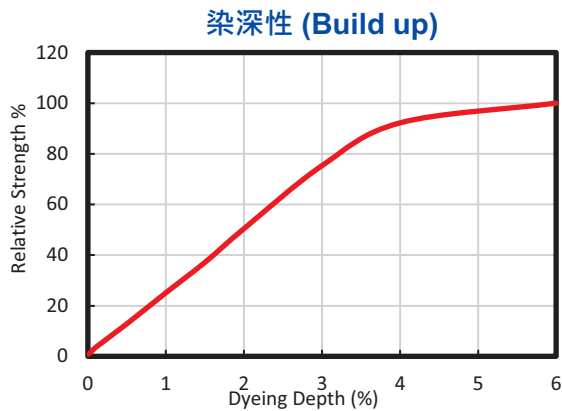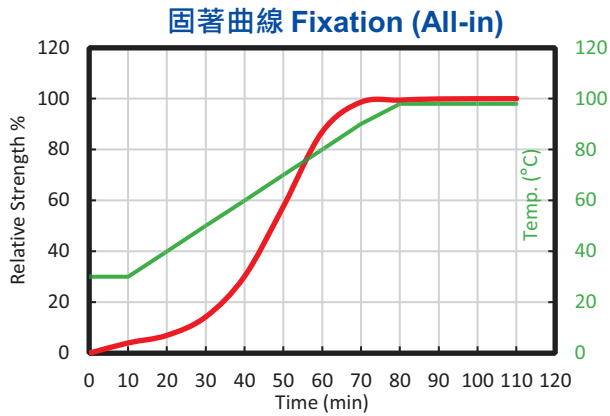

Everacid Blue S-BLW

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4	5	5	5	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	4	5	5	5	5	5	4-5		50ppm		1
	ISO 105 C10C	1/1N	3-4	5	5	5	5	5	3		100ppm		1
	ISO 105 C06 B2S	1/1N	4	5	5	5	5	5	5	Saliva 耐唾液	1/1N	4	
Water 耐水		1/1N	4-5	4-5	4	2-3	4	4-5	4	Bleeding 色泣牢度 (Daimru)		1/1N	4
Sea Water 耐海水		1/1N	4-5	4-5	3-4	3-4	4	3-4	4-5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	4	3-4	4	4-5	4-5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	4	2-3	2-3	3	3	2-3		Wet 濕		4-5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		2-3
	ISO 105 C10C	1/1N	4-5	5	5	5	5	5	4-5		100ppm		1-2
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	5	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	> 6
	1/12N	4-5	6		Alkali 鹼		4	> 6
	1/3N	5	> 6					
	1/1N	5	> 6					
	2/1N	5	> 6					

Everacid Blue S-2R

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.25%	0.5%	1.0%	2.0%	2.4%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Medium to Poor 中~差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	100 g/l
	90°C→25°C	100 g/l
Color constancy 色恆性	Tungsten lamp	B (G)
	TL84 lamp	B (R)
Metallic ions 金屬離子	Fe 2+ 鐵	5
	Cu 2+ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1
	Alkaline	1
	Neutral	1
Stripping 脫色性	Oxidation	5
	Reduction	3-4

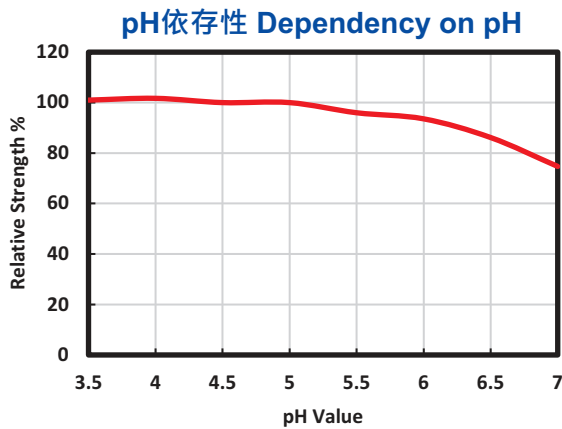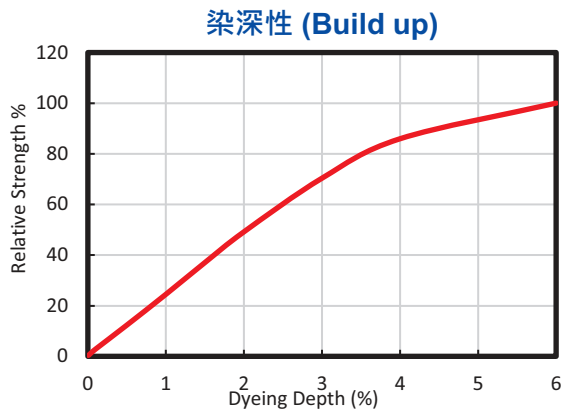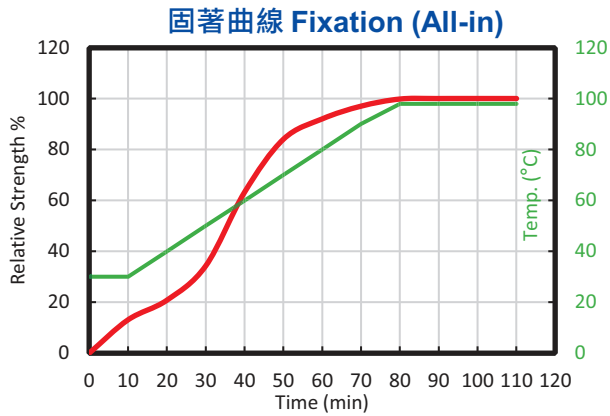

Everacid Blue S-2R

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色	
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item				
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	4-5	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	4	
	ISO 105 C10B	1/1N	4-5	5	5	4-5	5	5	4		50ppm		1-2	
	ISO 105 C10C	1/1N	4-5	5	5	3-4	5	5	2		100ppm		1	
	ISO 105 C06 B2S	1/1N	4-5	5	5	4	5	5	4	Saliva 耐唾液		1/1N	4-5	
Water 耐水		1/1N	5	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5	
Sea Water 耐海水		1/1N	4-5	5	4-5	4	4-5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5	
Perspiration 耐汗		Acid 酸	1/1N	4-5	5	5	4	4-5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
		Alkali 鹼		4-5	4	4-5	4	4-5	5	4-5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5											
	After 4hr. 4小時後		5											

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		4
	ISO 105 C10C	1/1N	5	5	5	4-5	5	5	3-4		100ppm		2-3
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)

Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4	4-5	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4	6
	1/12N	4-5	5		Alkali 鹼		4	6
	1/3N	4-5	5-6					
	1/1N	> 4-5	6					
	2/1N	5	> 6					


Everacid Turquoise S-5G

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.43%	0.85%	1.70%	3.40%	4.08%


Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Small 小
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	40 g/l
	90°C→25°C	10 g/l
Color constancy 色恆性	Tungsten lamp	B (G)
	TL84 lamp	B (R)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4-5
	Cu ²⁺ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4
	Cotton 棉	2
	Nylon 尼龍	1
	Polyester 聚酯	3-4
	Acrylic 壓克力	3-4
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1-2
	Alkaline	1
	Neutral	2
Stripping 脫色性	Oxidation	4-5
	Reduction	3


固著曲線 Fixation (All-in)

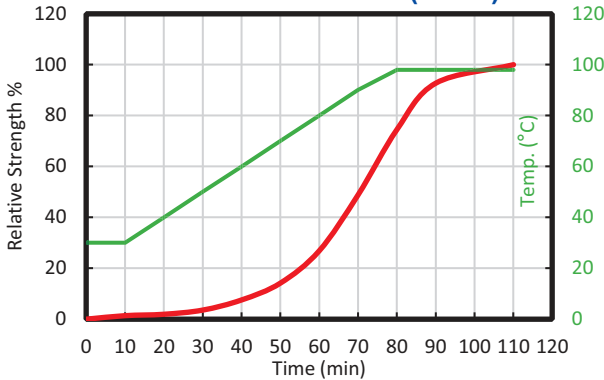

染深性 (Build up)

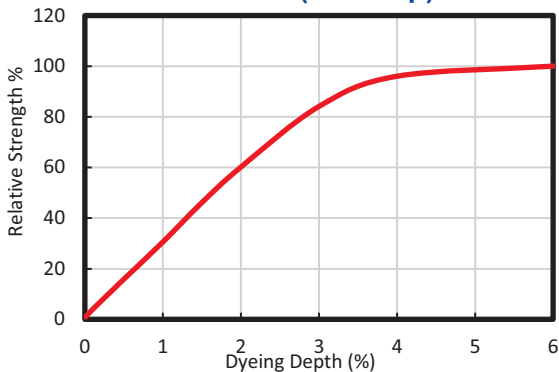

pH依存性 Dependency on pH

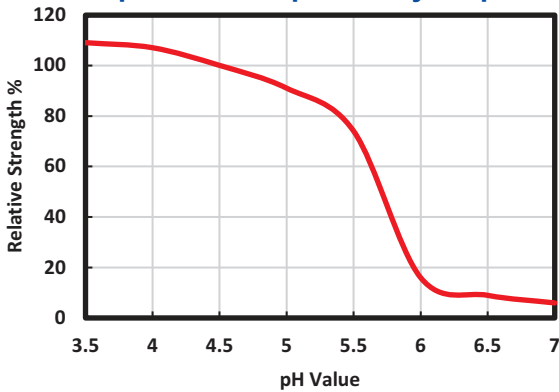

Everacid Turquoise S-5G

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	3-4	5	4	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	2
	ISO 105 C10B	1/1N	3	5	3-4	5	5	5	5		50ppm		1-2
	ISO 105 C10C	1/1N	3	5	2-3	5	5	5	5		100ppm		1
	ISO 105 C06 B2S	1/1N	3-4	5	4	5	5	5	5	5	Saliva 耐唾液	1/1N	2-3
Water 耐水		1/1N	4	4-5	3-4	3	4	4-5	4	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	3	4-5	2	4	4-5	4-5	4-5	Nitrogen Oxides 氣體變褪色		1/1N	1
Perspiration 耐汗	Acid 酸	1/1N	3	4-5	2	3-4	4	4-5	3-4	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		2-3	4-5	2	3-4	3-4	3-4	4		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	2-3	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	2
	ISO 105 C10B	1/1N	2	5	4-5	5	5	5	5		50ppm		1
	ISO 105 C10C	1/1N	2	5	4	5	5	5	5		100ppm		1
	ISO 105 C06 B2S	1/1N	2-3	5	5	5	5	5	5	Saliva 耐唾液		1/1N	2-3
Water 耐水		1/1N	4	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	3	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	1-2
Perspiration 耐汗	Acid 酸	1/1N	3	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		2-3	5	4-5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)

日光堅牢度 (未固色)

Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	2	2	Perspiration Light 耐汗日光	Acid 酸	1/1 N	2-3	2
	1/12N	2-3	2-3		Alkali 鹼		2-3	2
	1/3N	2-3	4					
	1/1N	2-3	4					
	2/1N	2-3	4					


Everacid Green S-6G

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2 N
Dyeing Depth	0.29%	0.58%	1.16%	2.32%	2.78%


Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium 中
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Excellent 極佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon>>Wool 尼龍>>羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Bluer 藍味
Solubility g/l 溶解度	90°C water	50 g/l
	90°C→25°C	50 g/l
Color constancy 色恆性	Tungsten lamp	B (R)
	TL84 lamp	R (B)
Metallic ions 金屬離子	Fe 2+ 鐵	5
	Cu 2+ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸	4
	Cotton 棉	2
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	
	Alkaline	
	Neutral	
Stripping 脫色性	Oxidation	4-5
	Reduction	2


固著曲線 Fixation (All-in)

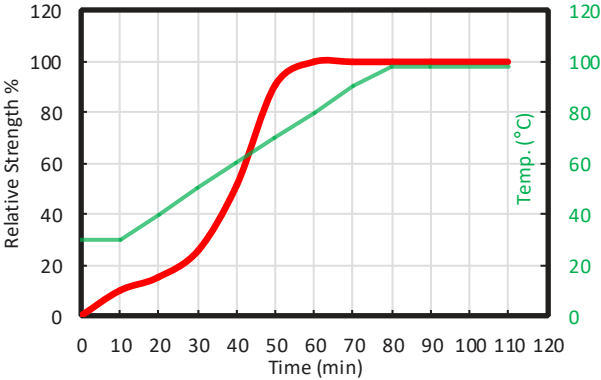

染深性 (Build up)

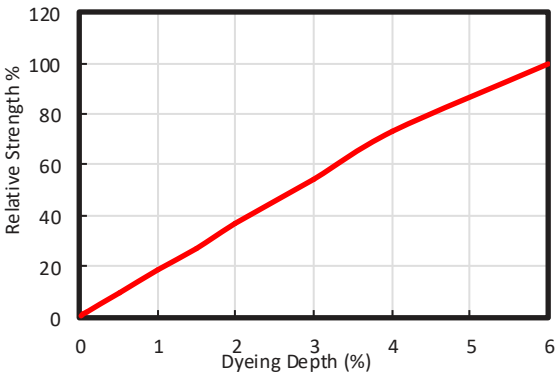

pH依存性 Dependency on pH

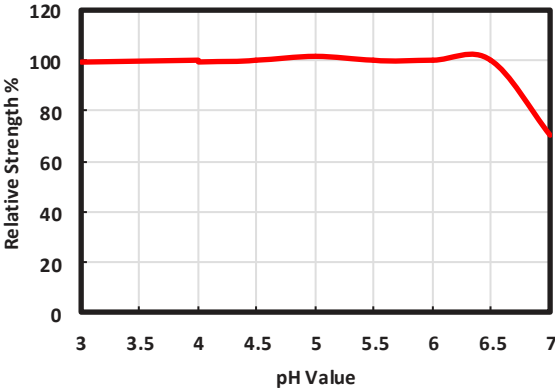

Everacid Green S-6G

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC 61-2A	1/1N	4-5	5	4-5	4-5	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1N	3-4
	ISO 105 C10B	1/1N	4	5	5	5	5	5	4-5		50ppm		1-2
	ISO 105 C10C	1/1N	4	5	4-5	5	5	5	4		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	
Perspiration 耐汗	Acid 酸	1/1N	4	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	4-5	4-5	4-5	4-5	4-5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC 61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1N	5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		5
	ISO 105 C10C	1/1N	5	5	5	5	5	5	4-5		100ppm		4-5
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment) 日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	>6	Perspiration Light 耐汗日光	Acid 酸	1/1N	4	6
	1/12N	4-5	>6		Alkali 鹼		3-4	6
	1/3N	4-5	>6					
	B/LK	4-5	>6					
	1/1N	4-5	>6					

Everset Yellow M-2R

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.20%	0.40%	0.80%	1.60%	1.92%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	40 g/l
	90°C→25°C	40 g/l
Color constancy 色恆性	Tungsten lamp	Y (R)
	TL84 lamp	Y (R)
Metallic ions 金屬離子	Fe 2+ 鐵	4-5
	Cu 2+ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4-5
	Cotton 棉	3-4
	Nylon 尼龍	2
	Polyester 聚酯	3-4
	Acrylic 壓克力	3-4
	Wool 羊毛	2
Discharge ability 拔染性	Decrolin	3-4
	Alkaline	1-2
Stripping 脫色性	Neutral	2
	Oxidation	1
	Reduction	1-2

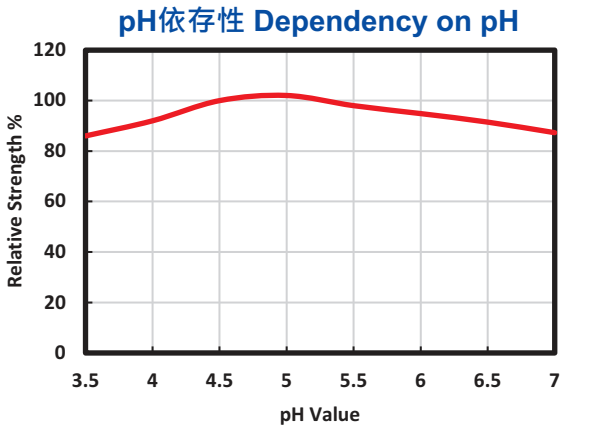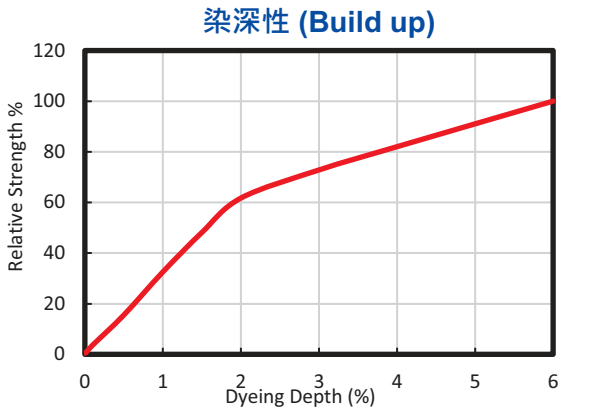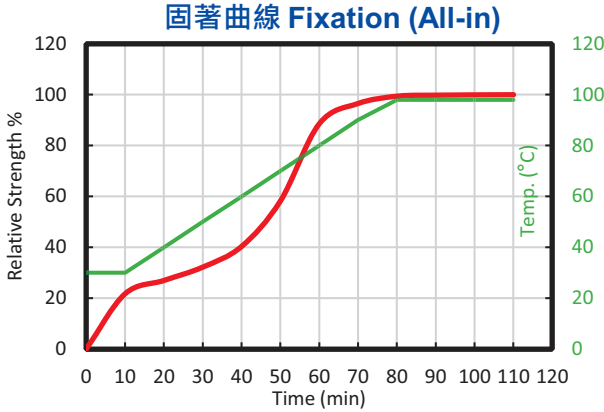

Everset Yellow M-2R

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	5	5	5	5		50ppm		3
	ISO 105 C10C	1/1N	4-5	5	5	4-5	5	5	4		100ppm		1-2
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液	1/1N	4-5	
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	4-5	5	5	4-5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	4-5	4-5	4-5	4-5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	4-5	5	5	5	5	5	5		50ppm		4-5
	ISO 105 C10C	1/1N	4-5	5	5	5	5	5	3		100ppm		4
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	5	6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	5	> 6
	1/12N	5	> 6		Alkali 鹼		5	> 6
	1/3N	5	> 6					
	1/1N	5	> 6					
	2/1N	5	> 6					

Everset Red M-G

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.15%	0.30%	0.60%	1.20%	1.44%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Yellower 黃味
Solubility g/l 溶解度	90°C water	100 g/l
	90°C→25°C	100 g/l
Color constancy 色恆性	Tungsten lamp	R (Y)
	TL84 lamp	R (Y)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4-5
	Cu ²⁺ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4-5
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2-3
	Alkaline	2-3
	Neutral	2
Stripping 脫色性	Oxidation	1
	Reduction	2

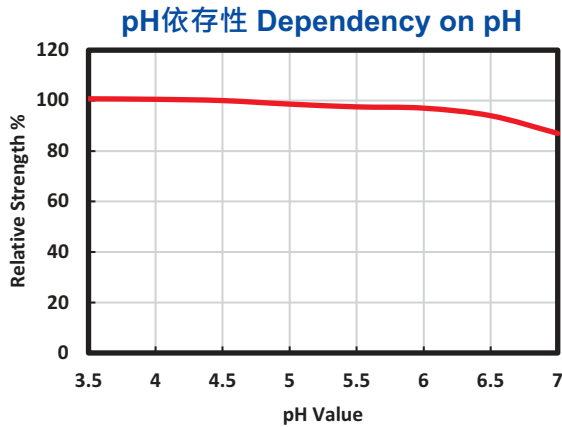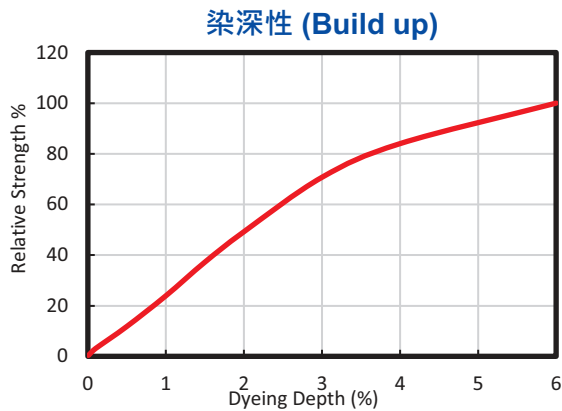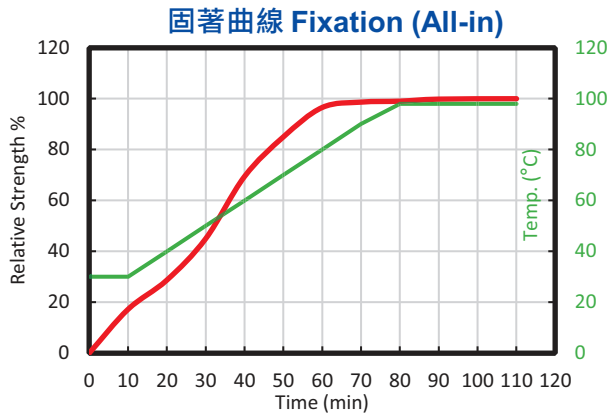

Everset Red M-G

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛				
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	4-5	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	4	5	5	3-4		50ppm		3
	ISO 105 C10C	1/1N	4-5	5	4-5	3	4-5	5	2-3		100ppm		1-2
	ISO 105 C06 B2S	1/1N	4-5	5	5	4-5	5	5	5	Saliva 耐唾液	1/1N	4-5	
Water 耐水		1/1N	4-5	5	4-5	4	4-5	4-5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4
Sea Water 耐海水		1/1N	4-5	5	4-5	4	4-5	4-5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	4-5	4	4-5	4-5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	2-3										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	4-5	5	5	4-5		50ppm		4-5
	ISO 105 C10C	1/1N	4-5	5	5	3-4	5	5	3		100ppm		3-4
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	5	6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	> 6
	1/12N	5	6		Alkali 鹼		5	> 6
	1/3N	5	> 6					
	1/1N	5	> 6					
	2/1N	5	> 6					

Everset Bordeaux M-B

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.14%	0.28%	0.57%	1.13%	1.36%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Medium 中
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Bluer 藍味
Solubility g/l 溶解度	90°C water	100 g/l
	90°C→25°C	20 g/l
Color constancy 色恆性	Tungsten lamp	R (Y)
	TL84 lamp	R (Y)
Metallic ions 金屬離子	Fe 2+ 鐵	5
	Cu 2+ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	3-4
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	3-4
	Acrylic 壓克力	3-4
	Wool 羊毛	1-2
Discharge ability 拔染性	Decrolin	1-2
	Alkaline	1-2
	Neutral	1-2
Stripping 脫色性	Oxidation	1-2
	Reduction	4

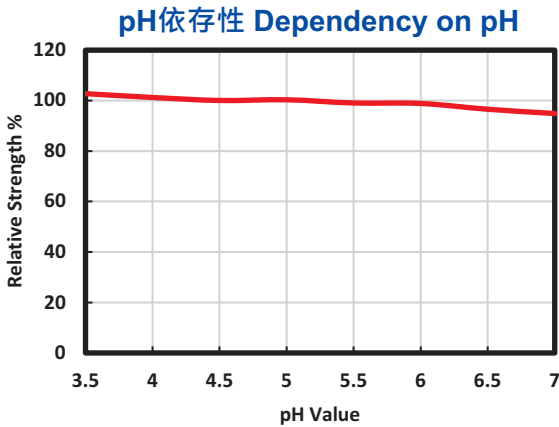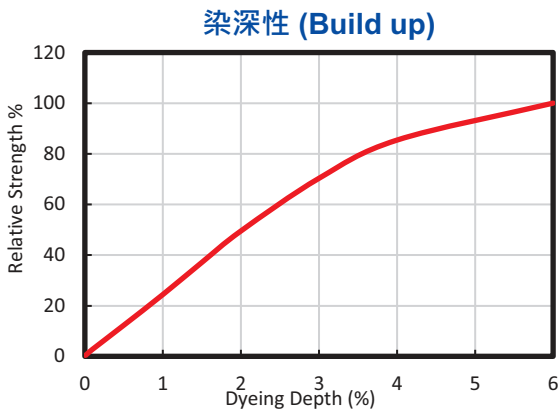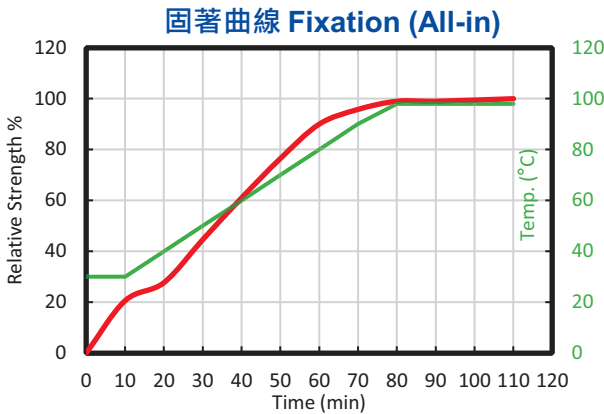

Everset Bordeaux M-B

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	4-5	5	5	3-4	5	5	4-5		50ppm		2
	ISO 105 C10C	1/1N	4-5	5	4-5	2-3	5	5	2-3		100ppm		1-2
	ISO 105 C06 B2S	1/1N	4-5	5	5	4	5	5	5	Saliva 耐唾液	1/1N	4-5	
Water 耐水		1/1N	4-5	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	3-4
Sea Water 耐海水		1/1N	4-5	5	5	4-5	4-5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	4-5	4-5	4-5	4-5	5		Wet 濕		4-5
Hot pressing 耐熱壓	Immediately 立即	1/1N	2-3										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	4-5	5	5	4	5	5	5		50ppm		3-4
	ISO 105 C10C	1/1N	4-5	5	5	3	5	5	3		100ppm		2-3
	ISO 105 C06 B2S	1/1N	4-5	5	5	4-5	5	5	5	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	5	5	5	5	5		Wet 濕		4-5

Light Fastness (Without Fixing Treatment) 日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	> 6
	1/12N	4-5	6		Alkali 鹼		4-5	> 6
	1/3N	4-5	> 6					
	1/1N	5	> 6					
	2/1N	5	> 6					

Everset Brown M-B

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.16%	0.33%	0.65%	1.30%	1.56%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Poor 差
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	100 g/l
	90°C→25°C	100 g/l
Color constancy 色恆性	Tungsten lamp	R (Y)
	TL84 lamp	G
Metallic ions 金屬離子	Fe 2+ 鐵	4-5
	Cu 2+ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	3-4
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	3-4
	Acrylic 壓克力	4
	Wool 羊毛	2
Discharge ability 拔染性	Decrolin	2
	Alkaline	2-3
	Neutral	2
Stripping 脫色性	Oxidation	1
	Reduction	1

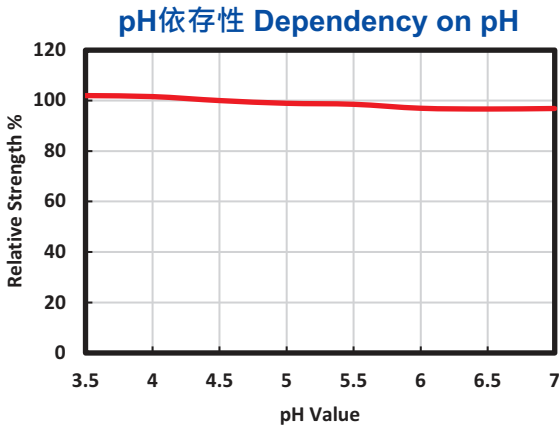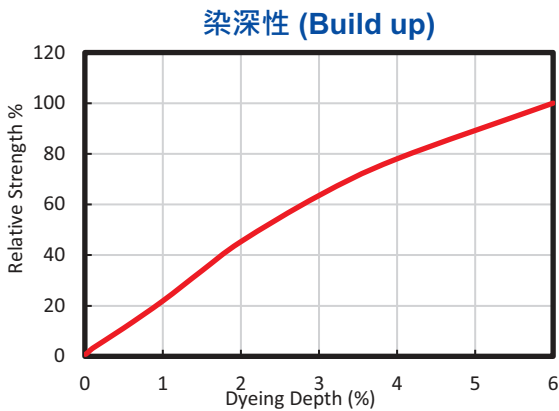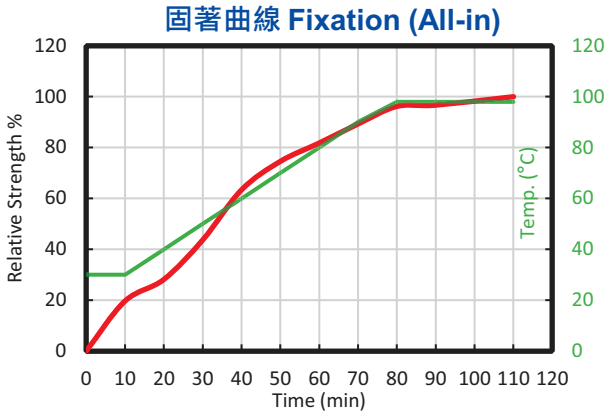

Everset Brown M-B

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	3-4	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	3-4	5	5	5		50ppm		1-2
	ISO 105 C10C	1/1N	4-5	5	5	3	5	5	5		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	5	5	4-5	5	5	5	Saliva 耐唾液	1/1N	4-5	
Water 耐水		1/1N	5	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	5	5	5	4-5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	4-5
	Alkali 鹼		5	5	5	4	5	5	5		Wet 濕		4-5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		4-5
	ISO 105 C10C	1/1N	5	5	5	5	5	5	5		100ppm		3
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4	6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	5	> 6
	1/12N	4-5	6		Alkali 鹼		5	> 6
	1/3N	4-5	> 6					
	1/1N	4-5	> 6					
	2/1N	5	> 6					

Everset Blue M-2R

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.25%	0.5%	1.0%	2.0%	2.4%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Medium to Poor 中~差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	100 g/l
	90°C→25°C	100 g/l
Color constancy 色恆性	Tungsten lamp	B (G)
	TL84 lamp	B (R)
Metallic ions 金屬離子	Fe 2+ 鐵	5
	Cu 2+ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1
	Alkaline	1
	Neutral	1
Stripping 脫色性	Oxidation	5
	Reduction	3-4

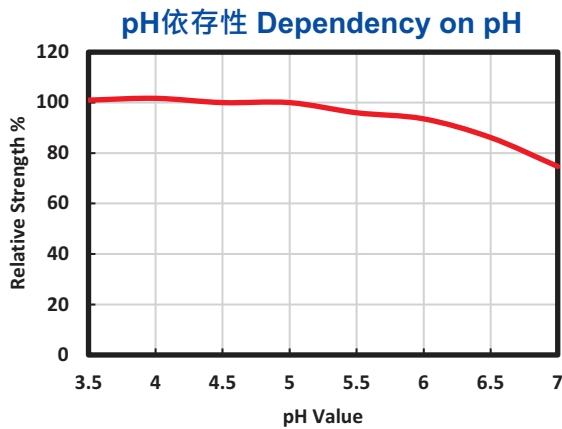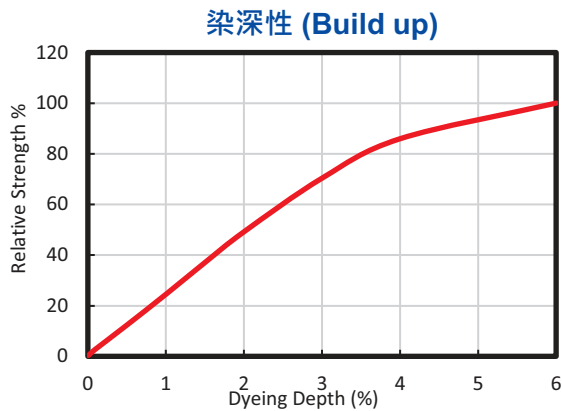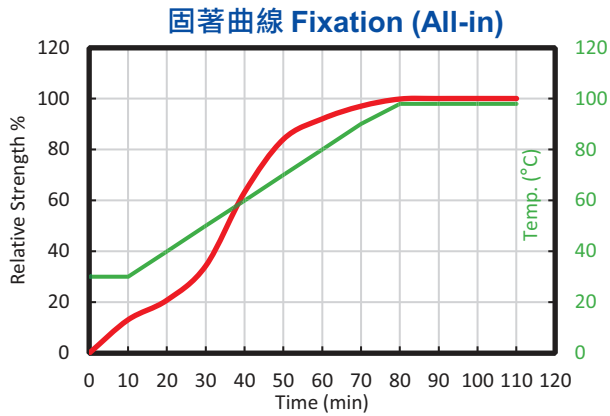

Everset Blue M-2R

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	4-5	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	4-5	5	5	4-5	5	5	4		50ppm		1-2
	ISO 105 C10C	1/1N	4-5	5	5	3-4	5	5	2		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	5	5	4	5	5	4	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	5	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	4-5	4	4-5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	4	4-5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	4	4-5	4	4-5	5	4-5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		4-5
	ISO 105 C10C	1/1N	5	5	5	4-5	5	5	3-4		100ppm		2-3
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4	4-5	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4	6
	1/12N	4-5	5		Alkali 鹼		4	6
	1/3N	4-5	5-6					
	1/1N	> 4-5	6					
	2/1N	5	> 6					

Everset Navy M-R

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.18%	0.35%	0.70%	1.40%	1.68%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium 中
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Poor 差
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	100 g/l
	90°C→25°C	100 g/l
Color constancy 色恆性	Tungsten lamp	R
	TL84 lamp	R (B)
Metallic ions 金屬離子	Fe 2+ 鐵	4
	Cu 2+ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	3-4
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2
	Alkaline	2-3
	Neutral	2
Stripping 脫色性	Oxidation	2
	Reduction	1

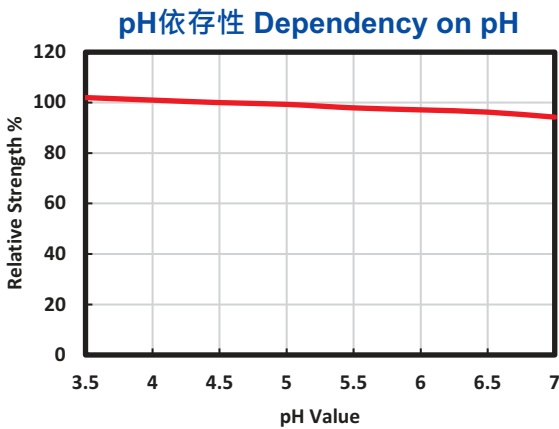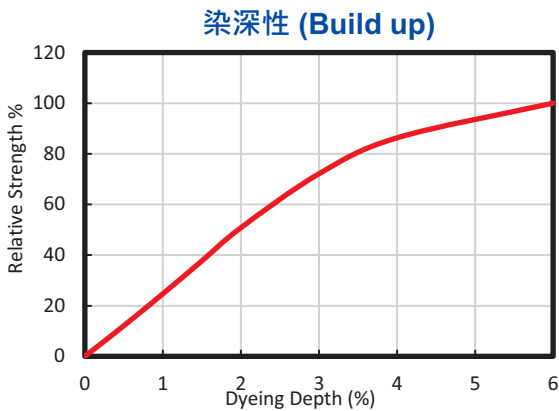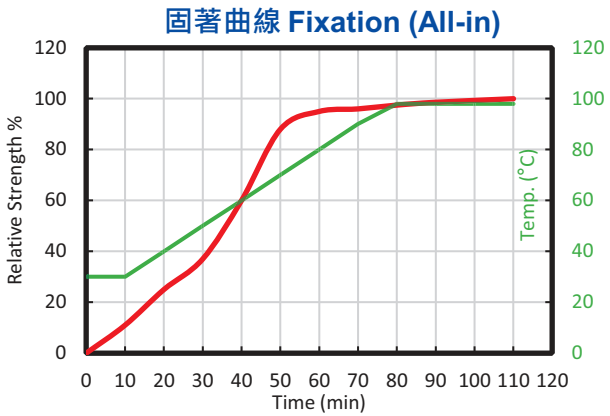

Everset Navy M-R

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	4-5	4	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	3-4
	ISO 105 C10B	1/1N	4-5	5	5	3	5	5	4-5		50ppm		2-3
	ISO 105 C10C	1/1N	4-5	5	5	2-3	5	5	4		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	5	4-5	4	5	5	4-5	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	4-5	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	4-5	5	5	4-5	4-5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	4-5
	Alkali 鹼		4-5	5	4-5	4	4-5	5	5		Wet 濕		3-4
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		4-5
	ISO 105 C10C	1/1N	5	5	5	5	5	5	5		100ppm		3-4
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		4-5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	2	5	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4	5
	1/12N	2-3	5-6		Alkali 鹼		4	5-6
	1/3N	3-4	5-6					
	1/1N	4	6					
	2/1N	4-5	> 6					

Everset Grey M-G

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.14%	0.28%	0.55%	1.10%	1.32%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Poor 差
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	100 g/l
	90°C→25°C	80 g/l
Color constancy 色恆性	Tungsten lamp	R
	TL84 lamp	R (B)
Metallic ions 金屬離子	Fe 2+ 鐵	4
	Cu 2+ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	3-4
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2
	Alkaline	3
	Neutral	2
Stripping 脫色性	Oxidation	2
	Reduction	2

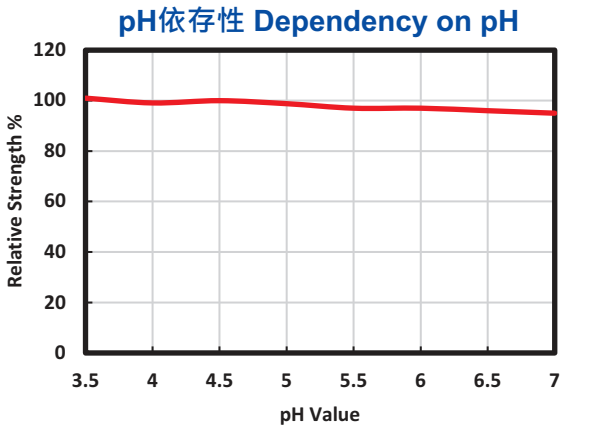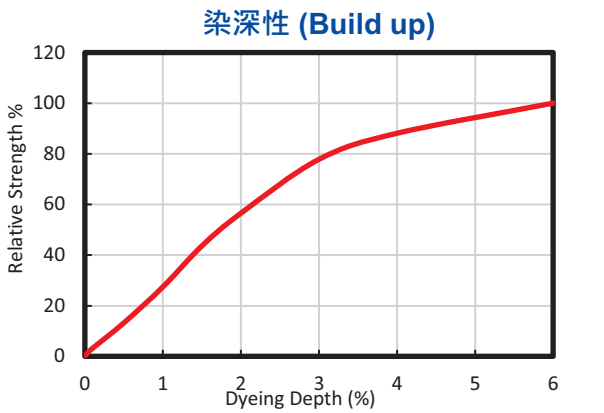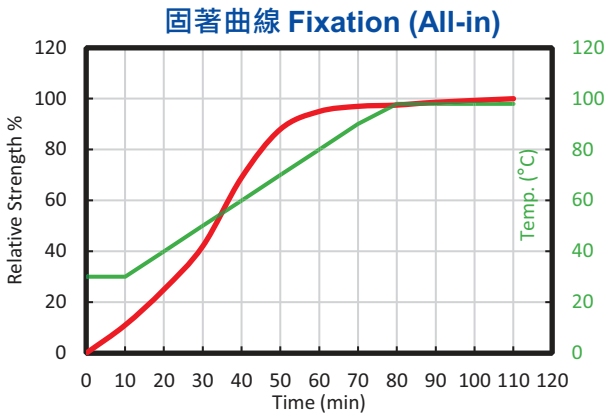

Everset Grey M-G

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	5	4	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	4-5	5	5	3-4	4-5	5	4		50ppm		3
	ISO 105 C10C	1/1N	4-5	5	5	3	5	5	3-4		100ppm		2
	ISO 105 C06 B2S	1/1N	5	5	5	4	5	5	4-5	Saliva 耐唾液	1/1N	4-5	
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	4-5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		4-5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	5	5	5	4-5	5	5	5		50ppm		4-5
	ISO 105 C10C	1/1N	5	5	5	4-5	5	5	5		100ppm		3-4
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4	6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	> 6
	1/12N	4	6		Alkali 鹼		4-5	> 6
	1/3N	4-5	> 6					
	1/1N	4-5	> 6					
	2/1N	5	> 6					

Everset Black M-B

Standard Depth	1/25 N	1/12 N	1/3 N	B/LK	B/DK
Dyeing Depth	0.14%	0.28%	0.55%	1.10%	2.20%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium 中
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Medium 中
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	80 g/l
	90°C→25°C	80 g/l
Color constancy 色恆性	Tungsten lamp	R
	TL84 lamp	R (B)
Metallic ions 金屬離子	Fe 2+ 鐵	5
	Cu 2+ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	3
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2
	Alkaline	2-3
	Neutral	2
Stripping 脫色性	Oxidation	1-2
	Reduction	1

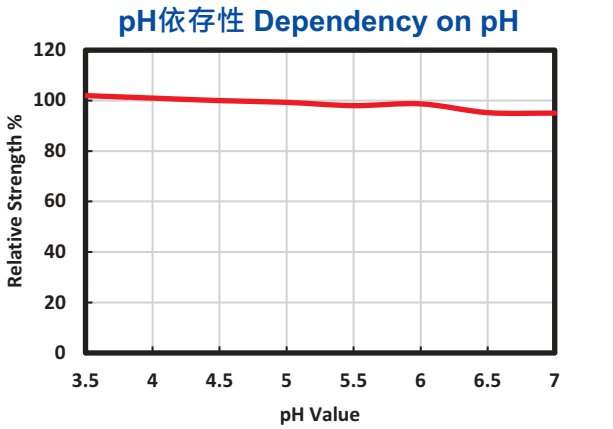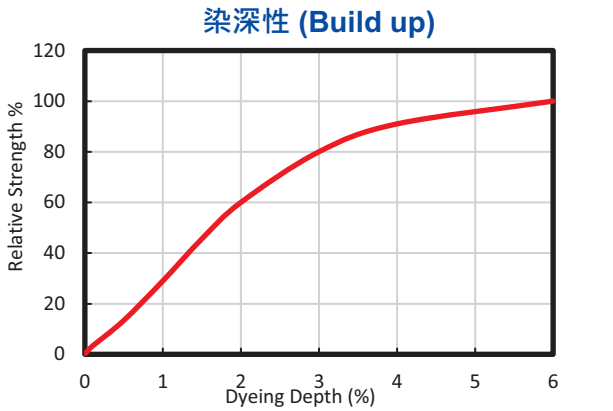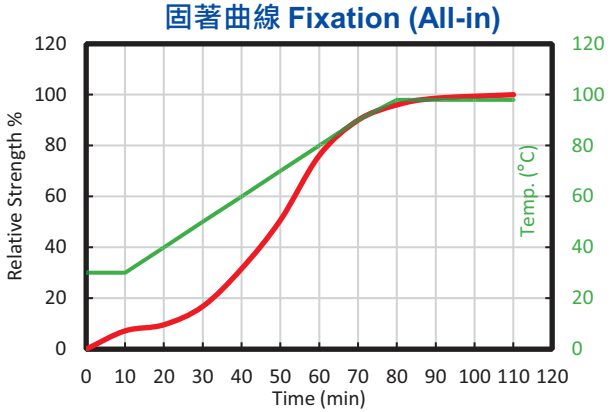

Everset Black M-B

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛				
Fastness Item													
Washing 耐水洗	AATCC TM61-2A	B/DK	4-5	5	4-5	3	4-5	4-5	4-5	Chlorinated Water 耐氯水	20ppm	B/DK	3-4
	ISO 105 C10B	B/DK	4-5	5	4-5	2	4-5	4-5	4-5		50ppm		1
	ISO 105 C10C	B/DK	4-5	5	4	2	4-5	4	4		100ppm		1
	ISO 105 C06 B2S	B/DK	4-5	5	4-5	3	4-5	4-5	4-5	Saliva 耐唾液		B/DK	4-5
Water 耐水		B/DK	4-5	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		B/DK	4-5
Sea Water 耐海水		B/DK	4-5	5	5	4-5	5	5	5	Nitrogen Oxides 氣體變褪色		B/DK	4-5
Perspiration 耐汗	Acid 酸	B/DK	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	B/DK	4
	Alkali 鹼		4-5	5	5	4-5	4-5	5	5		Wet 濕		4
Hot pressing 耐熱壓	Immediately 立即	B/DK	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	B/DK	5	5	5	4	5	5	5	Chlorinated Water 耐氯水	20ppm	B/DK	4-5
	ISO 105 C10B	B/DK	5	5	5	4-5	5	5	4-5		50ppm		4-5
	ISO 105 C10C	B/DK	5	5	5	5	5	5	5		100ppm		3-4
	ISO 105 C06 B2S	B/DK	5	5	5	4-5	5	5	5	Saliva 耐唾液		B/DK	5
Water 耐水		B/DK	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		B/DK	5
Sea Water 耐海水		B/DK	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		B/DK	4-5
Perspiration 耐汗	Acid 酸	B/DK	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	B/DK	4-5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		4-5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4	6	Perspiration Light 耐汗日光	Acid 酸	B/DK	5	> 6
	1/12N	4-5	> 6		Alkali 鹼		5	> 6
	1/3N	4-5	> 6					
	B/LK	4-5	> 6					
	B/DK	5	> 6					

Everset Yellow PA-4G

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.14%	0.28%	0.55%	1.10%	1.32%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 低
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	50 g/l
	90°C→25°C	40 g/l
Color constancy 色恆性	Tungsten lamp	Y (R)
	TL84 lamp	Y (G)
Metallic ions 金屬離子	Fe 2+ 鐵	3-4
	Cu 2+ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4-5
	Cotton 棉	4
	Nylon 尼龍	1
	Polyester 聚酯	4
	Acrylic 壓克力	4
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1-2
	Alkaline	1-2
	Neutral	1-2
Stripping 脫色性	Oxidation	5
	Reduction	4-5

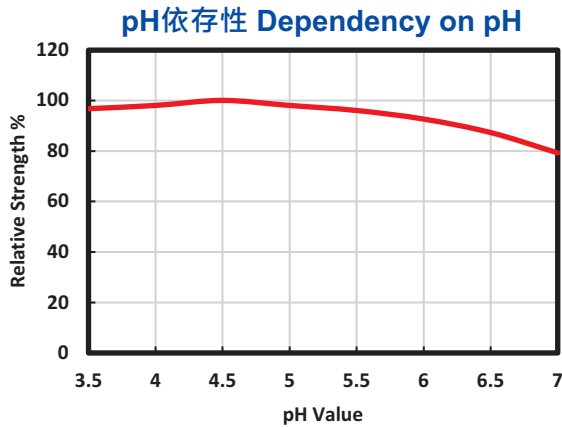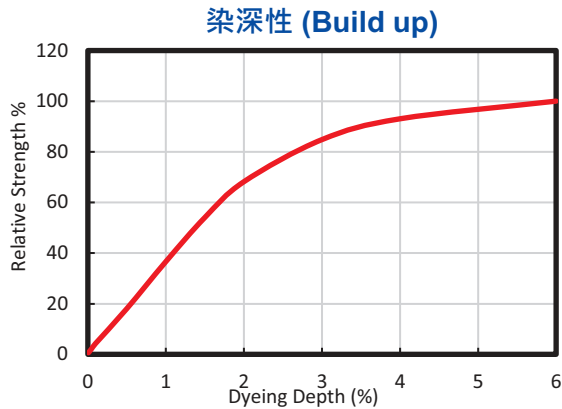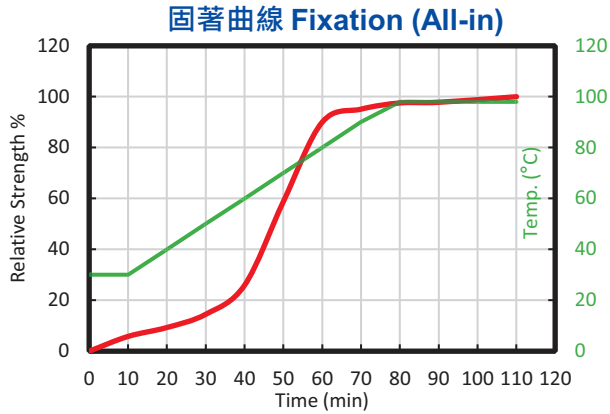

Everset Yellow PA-4G

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		2
	ISO 105 C10C	1/1N	4-5	5	5	5	5	5	4-5		100ppm		1
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	4-5	5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		4
	ISO 105 C10C	1/1N	5	5	5	5	5	5	5		100ppm		3
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	> 6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	> 6
	1/12N	5	> 6		Alkali 鹼		4-5	> 6
	1/3N	5	> 6					
	1/1N	5	> 6					
	2/1N	5	> 6					

Everset Yellow PA-2G

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.16%	0.33%	0.65%	1.30%	1.56%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	40 g/l
	90°C→25°C	40 g/l
Color constancy 色恆性	Tungsten lamp	Y (R)
	TL84 lamp	Y (R)
Metallic ions 金屬離子	Fe 2+ 鐵	4-5
	Cu 2+ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4-5
	Cotton 棉	3-4
	Nylon 尼龍	2
	Polyester 聚酯	3-4
	Acrylic 壓克力	3-4
	Wool 羊毛	2
Discharge ability 拔染性	Decrolin	3-4
	Alkaline	1-2
Stripping 脫色性	Neutral	2
	Oxidation	1
	Reduction	1-2

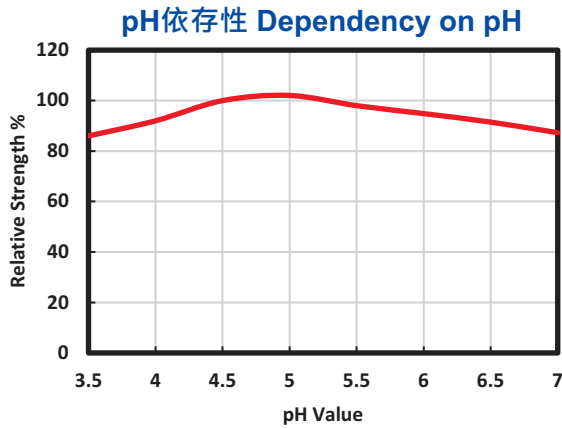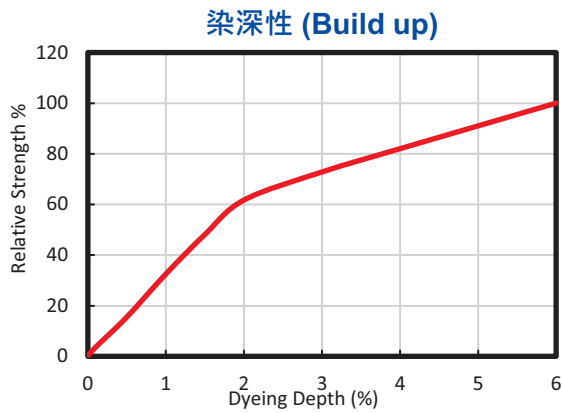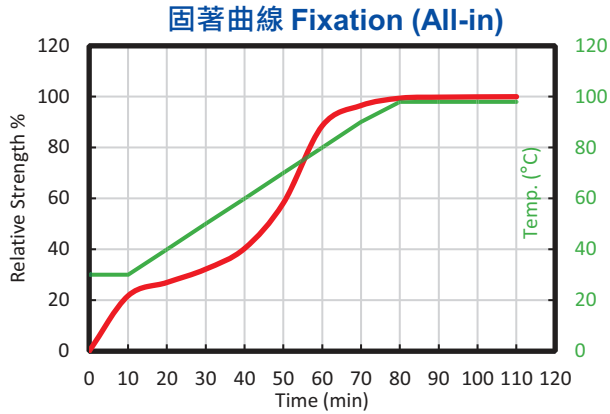

Everset Yellow PA-2G

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛				
Fastness Item													
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	5	5	5	5		50ppm		3
	ISO 105 C10C	1/1N	4-5	5	5	4-5	5	5	4		100ppm		1-2
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	5	Saliva 耐唾液	1/1N	4-5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	4-5	5	5	4-5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	4-5	4-5	4-5	4-5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	4-5	5	5	5	5	5	5		50ppm		4-5
	ISO 105 C10C	1/1N	4-5	5	5	5	5	5	3		100ppm		3-4
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	5	6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	5	> 6
	1/12N	5	> 6		Alkali 鹼		5	> 6
	1/3N	5	> 6					
	1/1N	5	> 6					
	2/1N	5	> 6					

Everset Yellow PA

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.20%	0.40%	0.80%	1.60%	1.92%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium to Large 中~大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	40 g/l
	90°C→25°C	20 g/l
Color constancy 色恆性	Tungsten lamp	Y (R)
	TL84 lamp	Y (R)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4-5
	Cu ²⁺ 銅	4
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	3-4
	Cotton 棉	3-4
	Nylon 尼龍	1-2
	Polyester 聚酯	3-4
	Acrylic 壓克力	3-4
	Wool 羊毛	1-2
Discharge ability 拔染性	Decrolin	3-4
	Alkaline	1-2
	Neutral	2
Stripping 脫色性	Oxidation	1
	Reduction	2

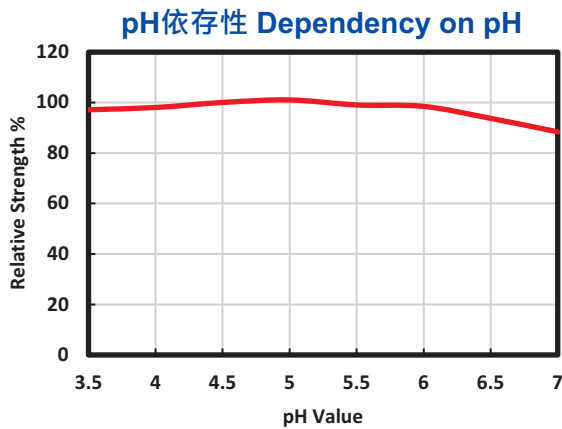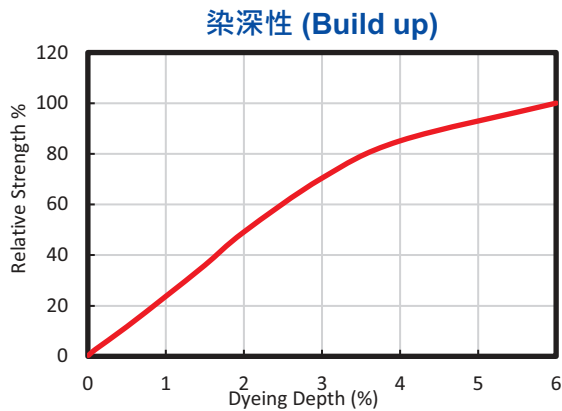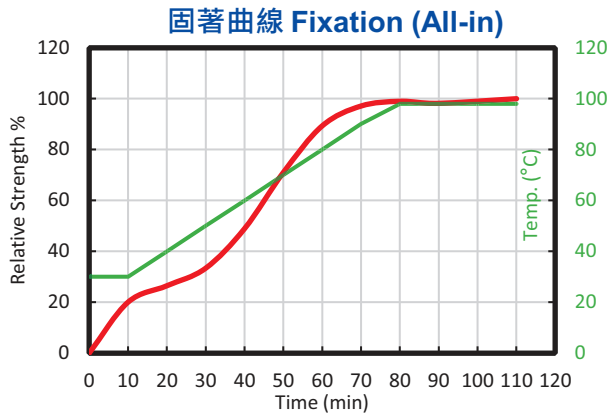

Everset Yellow PA

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	4	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	4-5	5	5	4	5	5	4-5		50ppm		3-4
	ISO 105 C10C	1/1N	4-5	5	5	3	5	5	2-3		100ppm		2-3
	ISO 105 C06 B2S	1/1N	4-5	5	5	4-5	5	5	5	Saliva 耐唾液	1/1N	4-5	
Water 耐水		1/1N	4-5	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	4-5	5	5	4-5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	5	4	5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	4-5	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	4-5	5	5	4-5		50ppm		4-5
	ISO 105 C10C	1/1N	4-5	5	5	3-4	5	5	3		100ppm		4
	ISO 105 C06 B2S	1/1N	4-5	5	5	4-5	5	5	5	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	5-6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	5	6
	1/12N	4-5	6		Alkali 鹼		5	6
	1/3N	4-5	6					
	1/1N	4-5	> 6					
	2/1N	4-5	> 6					

Everset Orange PA-2R

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.23%	0.45%	0.90%	1.80%	2.16%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Yellower 黃味
Solubility g/l 溶解度	90°C water	70 g/l
	90°C→25°C	40 g/l
Color constancy 色恆性	Tungsten lamp	Y (G)
	TL84 lamp	Y (G)
Metallic ions 金屬離子	Fe 2+ 鐵	5
	Cu 2+ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	3
	Cotton 棉	2
	Nylon 尼龍	1
	Polyester 聚酯	2-3
	Acrylic 壓克力	2
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	3
	Alkaline	2-3
	Neutral	3
Stripping 脫色性	Oxidation	5
	Reduction	4-5

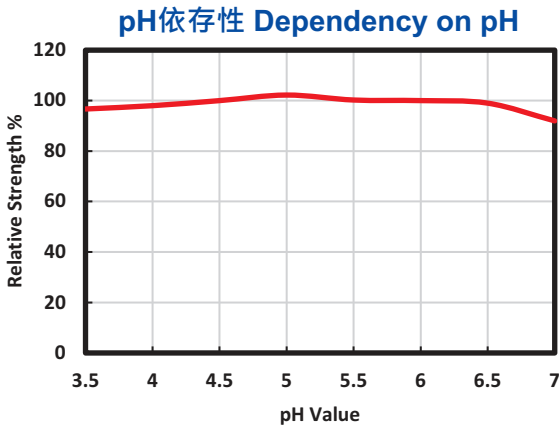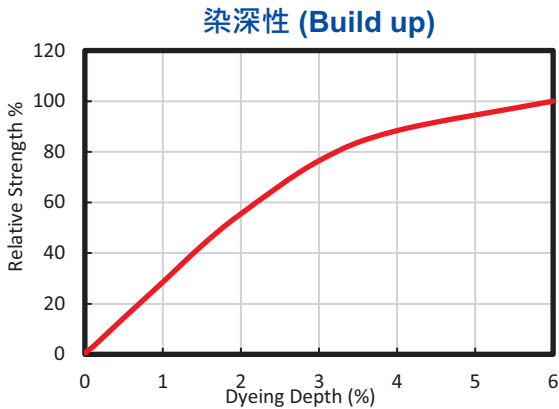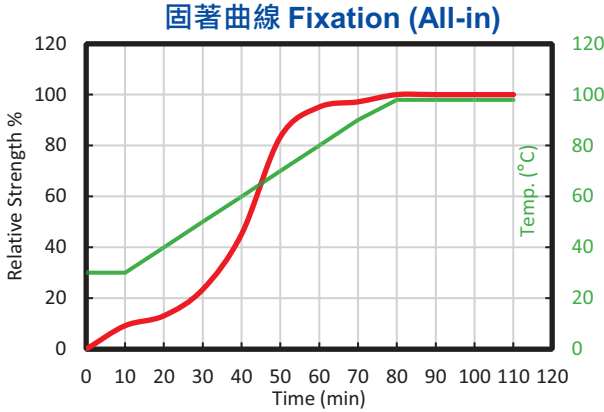

Everset Orange PA-2R

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	5	3-4	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	5	5	5	4-5	5	5	5		50ppm		2
	ISO 105 C10C	1/1N	4-5	5	5	4	5	5	4-5		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	5	5	4-5	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	4-5	4	5	5	5		Wet 濕		4-5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		4
	ISO 105 C10C	1/1N	5	5	5	5	5	5	5		100ppm		2-3
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	4-5	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	6
	1/12N	4-5	5		Alkali 鹼		4-5	6
	1/3N	4-5	5-6					
	1/1N	4-5	6					
	2/1N	5	6					

Everset Red PA-3G

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.25%	0.5%	1.0%	2.0%	2.4%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Redder 紅味
Solubility g/l 溶解度	90°C water	15 g/l
	90°C→25°C	10 g/l
Color constancy 色恆性	Tungsten lamp	R (Y)
	TL84 lamp	Y
Metallic ions 金屬離子	Fe 2+ 鐵	5
	Cu 2+ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	3-4
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	2-3
	Acrylic 壓克力	4
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2
	Alkaline	2
	Neutral	1-2
Stripping 脫色性	Oxidation	3
	Reduction	4-5

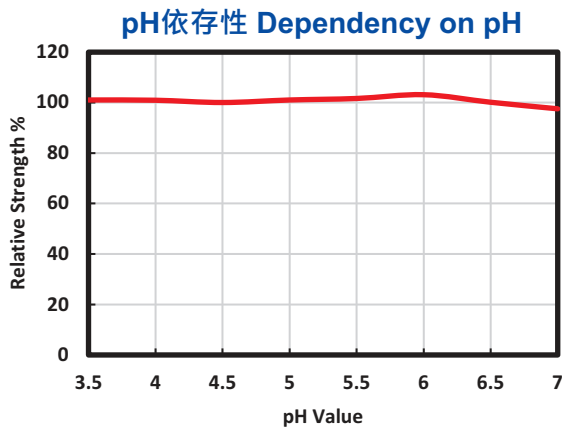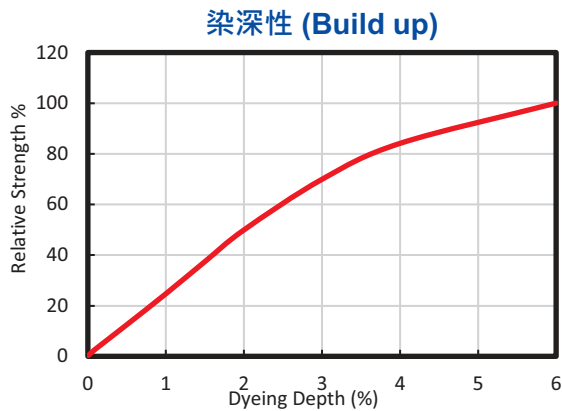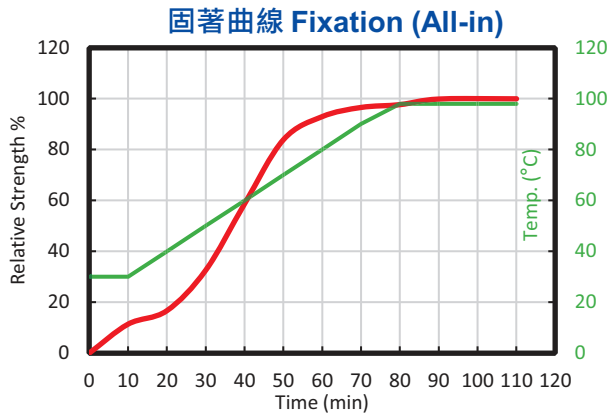

Everset Red PA-3G

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	4	3-4	5	5	4	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	4-5	5	5	4	5	5	4		50ppm		2-3
	ISO 105 C10C	1/1N	4-5	5	5	3-4	5	5	4		100ppm		1-2
	ISO 105 C06 B2S	1/1N	4-5	5	5	4	5	5	4-5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	4-5
	Alkali 鹼		5	5	5	4-5	5	5	5		Wet 濕		4-5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	4-5	4	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	4-5	4-5	5	5	5		50ppm		4
	ISO 105 C10C	1/1N	4-5	5	4-5	4-5	5	5	5		100ppm		3-4
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	5	4-5	5	5	5		Wet 濕		4-5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	5-6
	1/12N	4-5	6		Alkali 鹼		4-5	5-6
	1/3N	4-5	6					
	1/1N	4-5	6					
	2/1N	5	> 6					

Everset Red PA

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.08%	0.15%	0.30%	0.60%	1.20%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Yellower 黃味
Solubility g/l 溶解度	90°C water	80 g/l
	90°C→25°C	80 g/l
Color constancy 色恆性	Tungsten lamp	R (Y)
	TL84 lamp	R (Y)
Metallic ions 金屬離子	Fe 2+ 鐵	4-5
	Cu 2+ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4-5
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2-3
	Alkaline	2-3
	Neutral	2
Stripping 脫色性	Oxidation	1
	Reduction	2

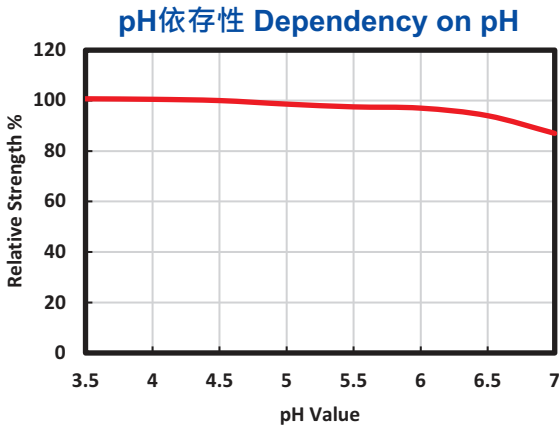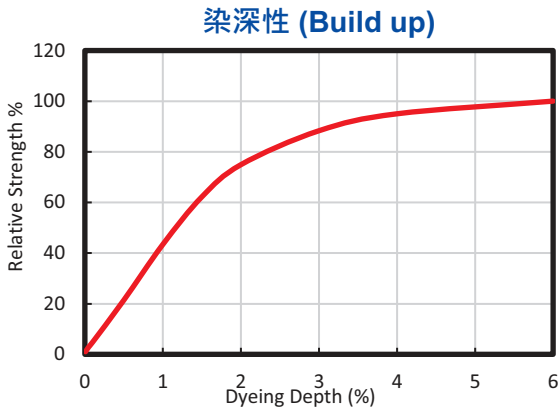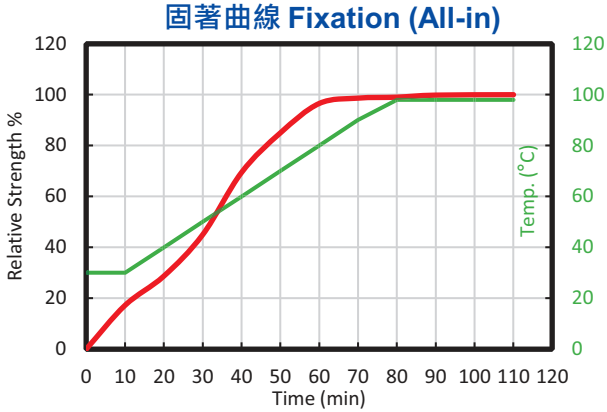

Everset Red PA

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	4-5	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	4	5	5	3-4		50ppm		3
	ISO 105 C10C	1/1N	4-5	5	4-5	3	4-5	5	2-3		100ppm		1-2
	ISO 105 C06 B2S	1/1N	4-5	5	5	4-5	5	5	5	Saliva 耐唾液	1/1N	4-5	
Water 耐水		1/1N	4-5	5	4-5	4	4-5	4-5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4
Sea Water 耐海水		1/1N	4-5	5	4-5	4	4-5	4-5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	4-5	4	4-5	4-5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	2-3										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	4-5	5	5	4-5		50ppm		4-5
	ISO 105 C10C	1/1N	4-5	5	5	3-4	5	5	3		100ppm		3
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	5	6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	> 6
	1/12N	5	6		Alkali 鹼		5	> 6
	1/3N	5	> 6					
	1/1N	5	> 6					
	2/1N	5	> 6					

Everset Red PA-4B

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.11%	0.23%	0.45%	0.9%	1.8%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Bluer 藍味
Solubility g/l 溶解度	90°C water	60 g/l
	90°C→25°C	30 g/l
Color constancy 色恆性	Tungsten lamp	Y
	TL84 lamp	Y (G)
Metallic ions 金屬離子	Fe ²⁺ 鐵	5
	Cu ²⁺ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2-3
	Alkaline	2-3
	Neutral	2-3
Stripping 脫色性	Oxidation	5
	Reduction	4

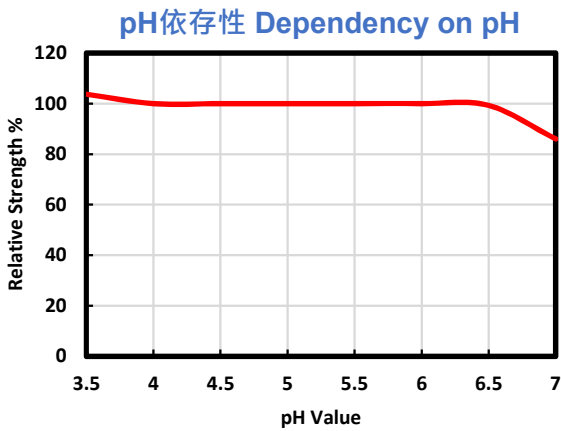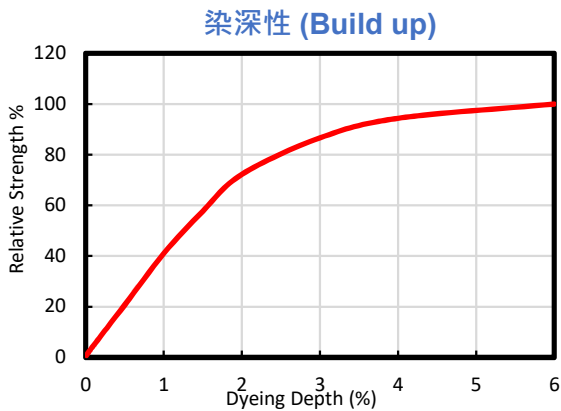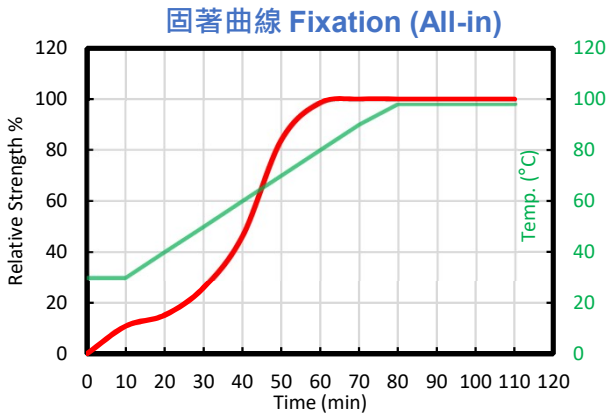

Everset Red PA-4B

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染							Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item				
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	4-5	4	4-5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	5	
	ISO 105 C10B	1/1N	5	5	5	4-5	4-5	5	5		50ppm		1-2	
	ISO 105 C10C	1/1N	4-5	5	5	4	4-5	5	4-5		100ppm		1	
	ISO 105 C06 B2S	1/1N	5	5	5	4-5	5	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5	
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5	
Perspiration 耐汗	Acid 酸	1/1N	5	5	4-5	4	4-5	4-5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5	
	Alkali 鹼		5	5	5	4-5	5	5	5		Wet 濕		5	
Hot pressing 耐熱壓	Immediately 立即	1/1N	4											
	After 4hr. 4小時後		5											

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		3-4
	ISO 105 C10C	1/1N	5	5	5	5	5	5	5		100ppm		3
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4	4	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	6
	1/12N	4	5		Alkali 鹼		4-5	6
	1/3N	4-5	5-6					
	1/1N	4-5	6					
	2/1N	5	> 6					

Everset Bordeaux PA

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.16%	0.33%	0.65%	1.30%	1.56%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Medium 中
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Bluer 藍味
Solubility g/l 溶解度	90°C water	80 g/l
	90°C→25°C	10 g/l
Color constancy 色恆性	Tungsten lamp	R (Y)
	TL84 lamp	R (Y)
Metallic ions 金屬離子	Fe 2+ 鐵	5
	Cu 2+ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	3-4
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	3-4
	Acrylic 壓克力	3-4
	Wool 羊毛	1-2
Discharge ability 拔染性	Decrolin	1-2
	Alkaline	1-2
	Neutral	1-2
Stripping 脫色性	Oxidation	1-5
	Reduction	4

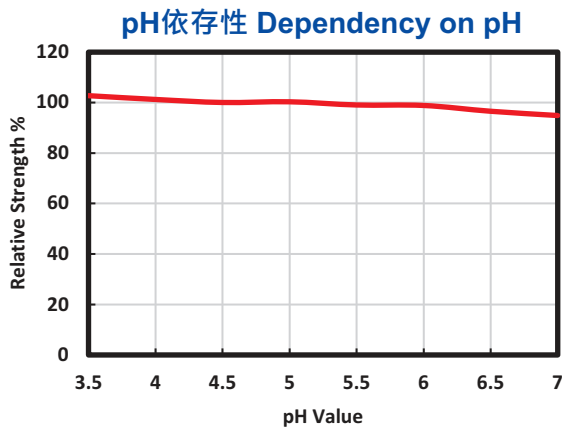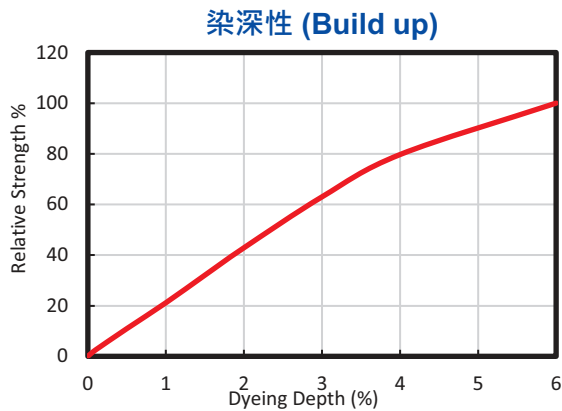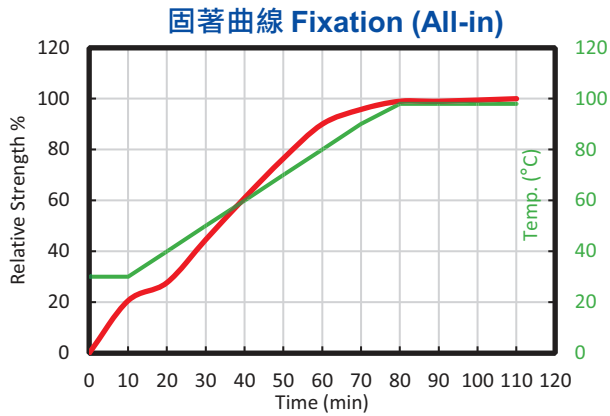

Everset Bordeaux PA

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	4-5	5	5	3-4	5	5	4-5		50ppm		2
	ISO 105 C10C	1/1N	4-5	5	4-5	2-3	5	5	2-3		100ppm		1-2
	ISO 105 C06 B2S	1/1N	4-5	5	5	4	5	5	5	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	4-5	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	3-4
Sea Water 耐海水		1/1N	4-5	5	5	4-5	4-5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	4-5	4-5	4-5	4-5	5		Wet 濕		4-5
Hot pressing 耐熱壓	Immediately 立即	1/1N	2-3										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	4	5	5	5		50ppm		3
	ISO 105 C10C	1/1N	4-5	5	5	3	5	5	3		100ppm		2-3
	ISO 105 C06 B2S	1/1N	4-5	5	5	4-5	5	5	5	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	5	5	5	5	5		Wet 濕		4-5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	> 6
	1/12N	4-5	6		Alkali 鹼		4-5	> 6
	1/3N	4-5	> 6					
	1/1N	5	> 6					
	2/1N	5	> 6					

Everset Blue PA-2R

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.25%	0.5%	1.0%	2.0%	2.4%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Medium to Poor 中~差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	100 g/l
	90°C→25°C	100 g/l
Color constancy 色恆性	Tungsten lamp	B (G)
	TL84 lamp	B (R)
Metallic ions 金屬離子	Fe 2+ 鐵	5
	Cu 2+ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1
	Alkaline	1
	Neutral	1
Stripping 脫色性	Oxidation	5
	Reduction	3-4

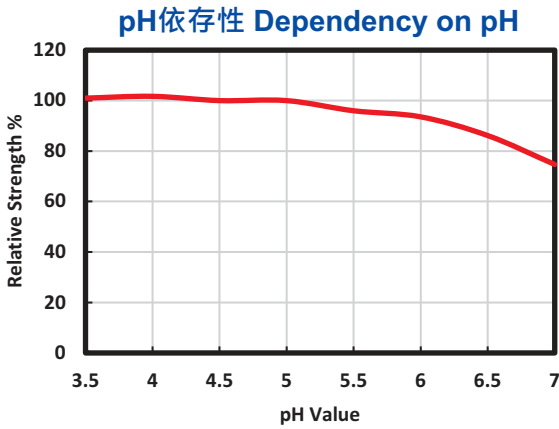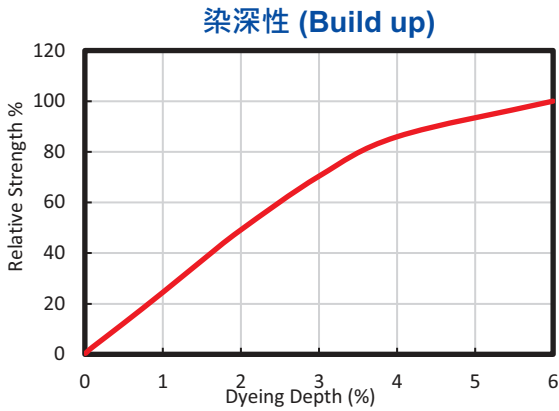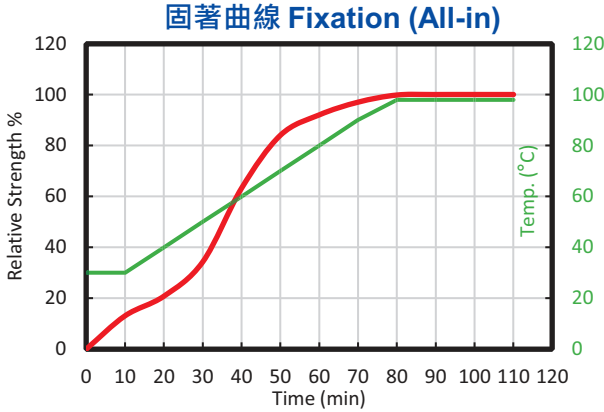

Everset Blue PA-2R

Fastness before fixing treatment 固色前牢度表

Evaluation Fastness Item		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation Fastness Item		Depth of shade 染色濃度	Color Change 變褪色
				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛				
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	4-5	5	5	4-5	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	4-5	5	5	4-5	5	5	4		50ppm		1-2
	ISO 105 C10C	1/1N	4-5	5	5	3-4	5	5	2		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	5	5	4	5	5	4	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	5	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	4-5	4	4-5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	4	4-5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	4	4-5	4	4-5	5	4-5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		4
	ISO 105 C10C	1/1N	5	5	5	4-5	5	5	3-4		100ppm		2-3
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4	4-5	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4	6
	1/12N	4-5	5		Alkali 鹼		4	6
	1/3N	4-5	5-6					
	1/1N	> 4-5	6					
	2/1N	5	> 6					

Everset Blue PA

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.15%	0.30%	0.60%	1.2%	1.44%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	120 g/l
	90°C→25°C	120 g/l
Color constancy 色恆性	Tungsten lamp	B (G)
	TL84 lamp	B (R)
Metallic ions 金屬離子	Fe ²⁺ 鐵	5
	Cu ²⁺ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	4-5
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	4
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1-2
	Alkaline	3
	Neutral	2
Stripping 脫色性	Oxidation	1
	Reduction	3-4

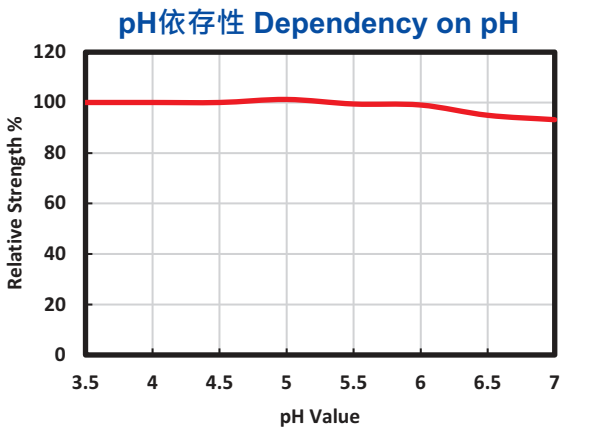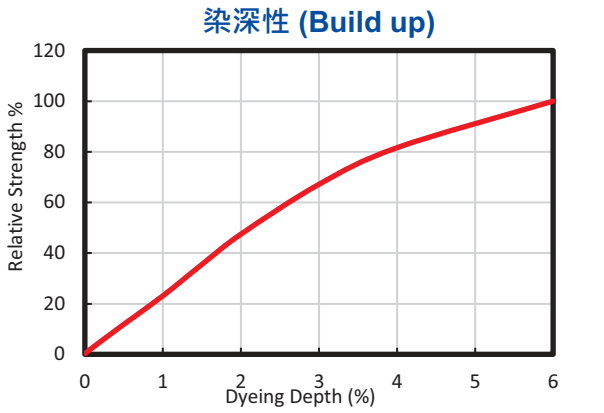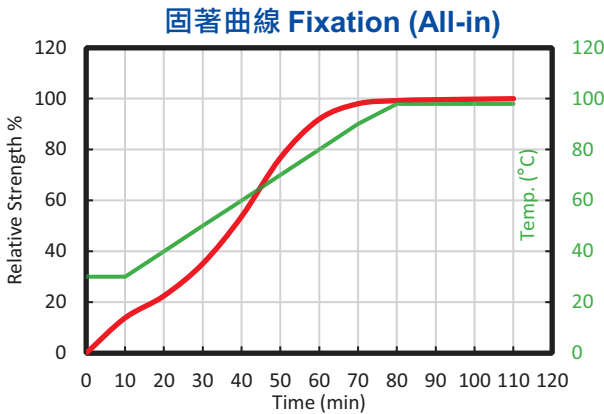

Everset Blue PA

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4
	ISO 105 C10B	1/1N	4-5	5	5	3-4	5	5	5		50ppm		3
	ISO 105 C10C	1/1N	4-5	5	5	2-3	5	4-5	3		100ppm		1-2
	ISO 105 C06 B2S	1/1N	4-5	5	5	4	5	5	5	Saliva 耐唾液	1/1N	4-5	
Water 耐水		1/1N	4-5	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	4-5	5	5	4-5	4-5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	4-5	4	4-5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	4	5	5	5		50ppm		4-5
	ISO 105 C10C	1/1N	4-5	5	5	3	5	5	4		100ppm		3
	ISO 105 C06 B2S	1/1N	4-5	5	5	4-5	5	5	5	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	4-5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	> 6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	5	> 6
	1/12N	4-5	> 6		Alkali 鹼		5	> 6
	1/3N	4-5	> 6					
	1/1N	5	> 6					
	2/1N	5	> 6					

Everset Navy PA

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.13%	0.25%	0.50%	1.00%	1.20%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	90 g/l
	90°C→25°C	90 g/l
Color constancy 色恆性	Tungsten lamp	B (G)
	TL84 lamp	B (R)
Metallic ions 金屬離子	Fe 2+ 鐵	5
	Cu 2+ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1-2
	Acetate 醋酸纖維	3-4
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	2-3
	Acrylic 壓克力	3-4
	Wool 羊毛	1-2
Discharge ability 拔染性	Decrolin	1
	Alkaline	2-3
	Neutral	1-2
Stripping 脫色性	Oxidation	1
	Reduction	4-5

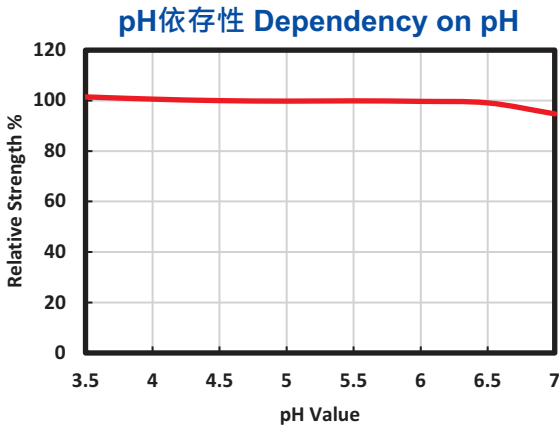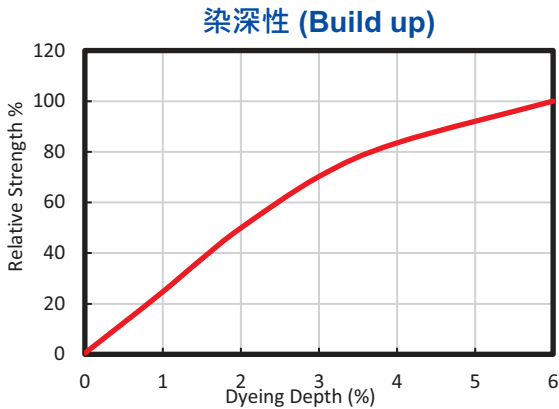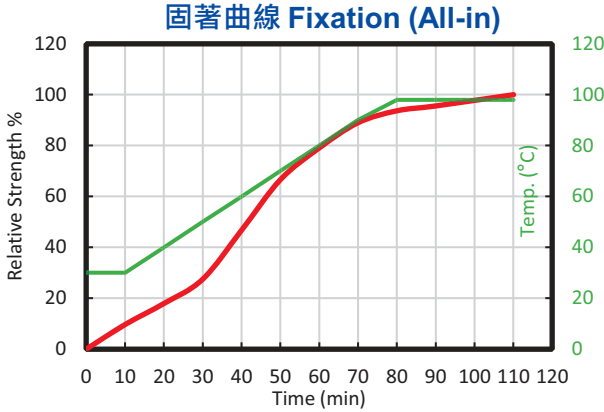

Everset Navy PA

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	3-4	5	4-5	5		50ppm		2
	ISO 105 C10C	1/1N	4-5	5	5	2-3	5	4-5	3		100ppm		1-2
	ISO 105 C06 B2S	1/1N	4-5	5	5	4-5	5	5	5	Saliva 耐唾液	1/1N	4-5	
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	5	5	5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	1/1N	4-5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	4-5	5	5	4-5	5	5	5		50ppm		3-4
	ISO 105 C10C	1/1N	4-5	5	5	4	5	5	5		100ppm		2
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	4-5
Water 耐水		1/1N	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	4-5
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	4-5
Perspiration 耐汗	Acid 酸	1/1N	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	5	> 6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	5	> 6
	1/12N	5	> 6		Alkali 鹼		5	> 6
	1/3N	5	> 6					
	1/1N	5	> 6					
	2/1N	5	> 6					

Everset Black PA-R

Standard Depth	1/25 N	1/12 N	1/3 N	B/LK	B/DK
Dyeing Depth	0.13%	0.25%	0.50%	1.00%	2.00%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium 中
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Poor 差
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Redder 紅味
Solubility g/l 溶解度	90°C water	100 g/l
	90°C→25°C	100 g/l
Color constancy 色恆性	Tungsten lamp	R
	TL84 lamp	R (B)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4-5
	Cu ²⁺ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	5
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	5
	Acrylic 壓克力	5
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2-3
	Alkaline	3
	Neutral	2-3
Stripping 脫色性	Oxidation	5
	Reduction	4-5

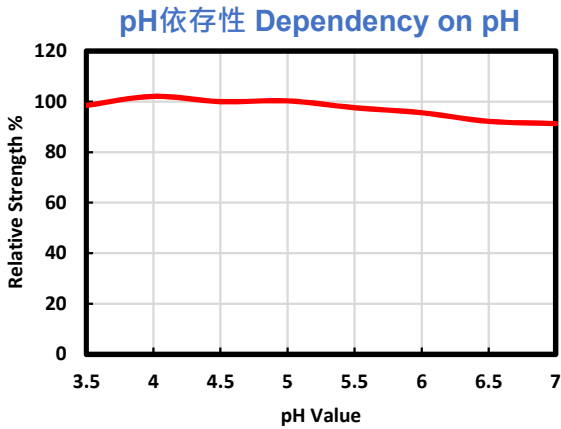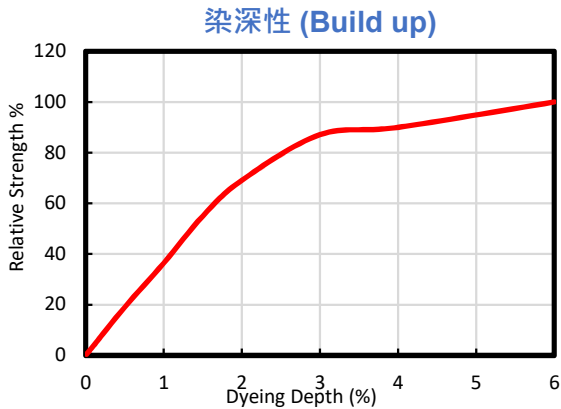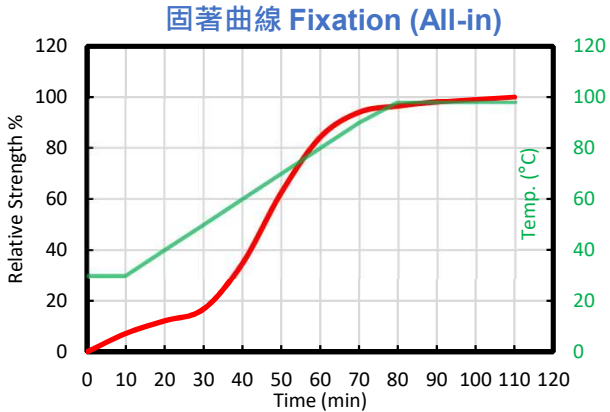

Everset Black PA-R

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	B/DK	4-5	5	5	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	B/DK	4-5
	ISO 105 C10B	B/DK	4-5	5	5	4	5	5	5		50ppm		2
	ISO 105 C10C	B/DK	4-5	5	5	3	5	5	4		100ppm		1
	ISO 105 C06 B2S	B/DK	4-5	5	5	4-5	5	5	5	Saliva 耐唾液	B/DK	5	
Water 耐水		B/DK	4-5	5	5	4-5	4-5	5	5	Bleeding 色泣牢度 (Daimru)		B/DK	4-5
Sea Water 耐海水		B/DK	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		B/DK	4-5
Perspiration 耐汗	Acid 酸	B/DK	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	B/DK	5
	Alkali 鹼		4-5	5	5	4-5	4-5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	B/DK	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	B/DK	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	B/DK	5
	ISO 105 C10B	B/DK	5	5	5	4-5	5	5	5		50ppm		4
	ISO 105 C10C	B/DK	5	5	5	4	5	5	5		100ppm		3
	ISO 105 C06 B2S	B/DK	5	5	5	4-5	5	5	5	Saliva 耐唾液		B/DK	5
Water 耐水		B/DK	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		B/DK	5
Sea Water 耐海水		B/DK	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		B/DK	5
Perspiration 耐汗	Acid 酸	B/DK	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	B/DK	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	6	Perspiration Light 耐汗日光	Acid 酸	B/DK	5	6
	1/12N	4-5	6		Alkali 鹼		5	6
	1/3N	4-5	6					
	B/LK	4-5	> 6					
	B/DK	5	> 6					

Everacid Yellow X-BW

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.16 %	0.33 %	0.65 %	1.30 %	1.56 %

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Small 小
Migration 移染性		Very poor 極差
Coverage of barré 橫條遮蓋性		Poor 差
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon < Wool 尼龍 < 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	30g/l
	90°C→25°C	30g/l
Color constancy 色恆性	Tungsten lamp	Y (G)
	TL84 lamp	Y(G)
Metallic ions 金屬離子	Fe 2+ 鐵	4-5
	Cu 2+ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸	4
	Cotton 棉	3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	4
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	4
	Alkaline	1-2
Stripping 脫色性	Neutral	2
	Oxidation	4-5
	Reduction	3

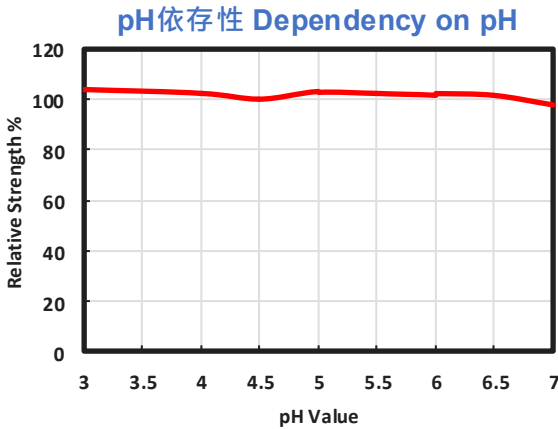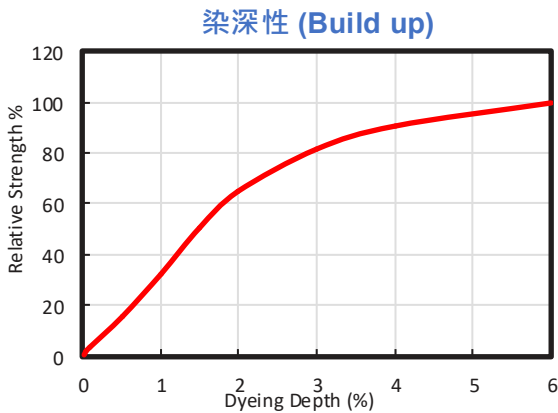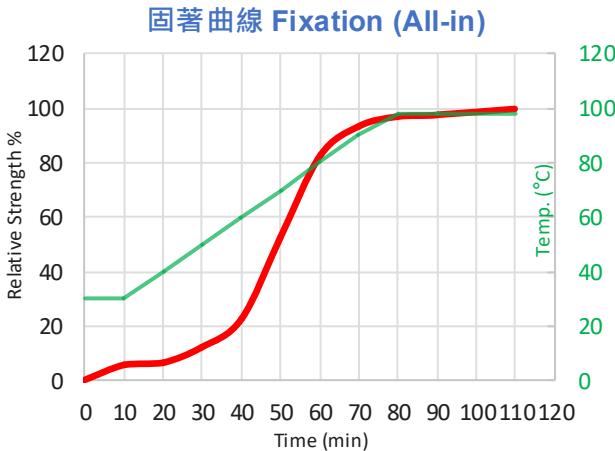

Everacid Yellow X-BW

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC 61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		3
	ISO 105 C10C	1/1N	5	5	5	5	5	5	5		100ppm		1-2
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛				
Fastness Item										Fastness Item			
Washing 耐水洗	AATCC 61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		5
	ISO 105 C10C	1/1N	5	5	5	5	5	5	5		100ppm		5
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	5	>6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	5	>6
	1/12N	5	>6		Alkali 鹼		5	>6
	1/3N	5	>6					
	1/1N	5	>6					
	2/1N	5	>6					

Everacid Red X-BW

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.08 %	0.15 %	0.30 %	0.60 %	1.20 %

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium to Large 中~大
Migration 移染性		Very poor 極差
Coverage of barré 橫條遮蓋性		Poor 差
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Yellower 黃味
Solubility g/l 溶解度	90°C water	70g/l
	90°C→25°C	70g/l
Color constancy 色恆性	Tungsten lamp	R (Y)
	TL84 lamp	R (Y)
Metallic ions 金屬離子	Fe ²⁺ 鐵	4
	Cu ²⁺ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸	4
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	3-4
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2-3
	Alkaline	2-3
	Neutral	2-3
Stripping 脫色性	Oxidation	4
	Reduction	3-4

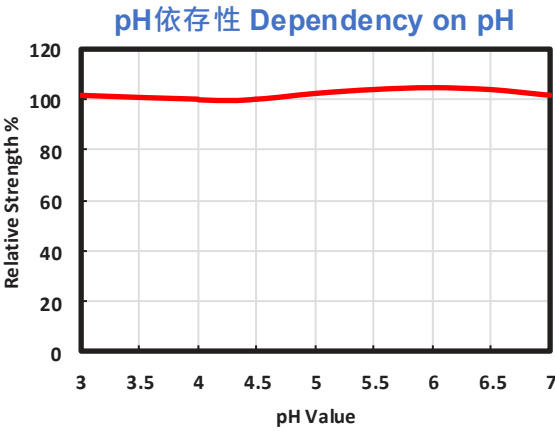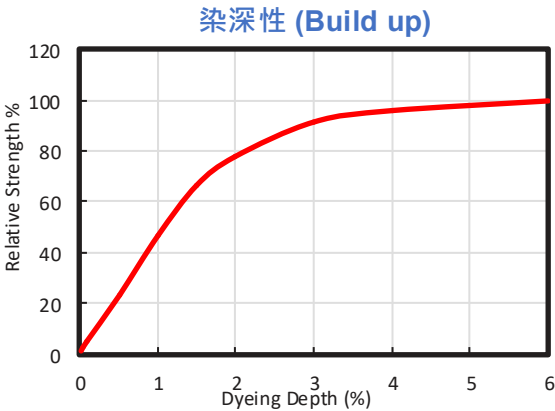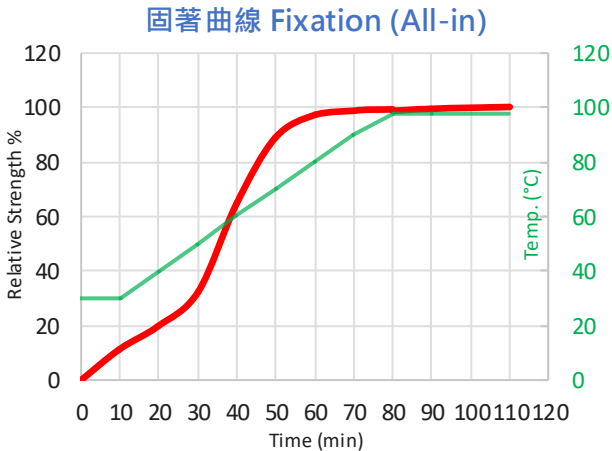

Everacid Red X-BW

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染							Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item				
Washing 耐水洗	AATCC 61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5	
	ISO 105 C10B	1/1N	5	5	5	4-5	5	5	5		50ppm		3	
	ISO 105 C10C	1/1N	5	5	5	3-4	5	5	2-3		100ppm		1-2	
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液	1/1N	5		
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5	
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5	
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5	
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5	
Hot pressing 耐熱壓	Immediately 立即	1/1N	4											
	After 4hr. 4小時後		4-5											

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC 61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		5
	ISO 105 C10C	1/1N	5	5	5	4-5	5	5	4-5		100ppm		5
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	5	>6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	5	>6
	1/12N	5	>6		Alkali 鹼		5	>6
	1/3N	5	>6					
	1/1N	5	>6					
	2/1N	5	>6					

Everacid Bordeaux X-BW

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.1%	0.19%	0.38%	0.76%	1.52%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Large 大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Bluer 藍味
Solubility g/l 溶解度	90°C water	20 g/l
	90°C→25°C	5 g/l
Color constancy 色恆性	Tungsten lamp	Y
	TL84 lamp	G (Y)
Metallic ions 金屬離子	Fe ²⁺ 鐵	5
	Cu ²⁺ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸	4
	Cotton 棉	2
	Nylon 尼龍	1
	Polyester 聚酯	2-3
	Acrylic 壓克力	3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1
	Alkaline	1
	Neutral	1
Stripping 脫色性	Oxidation	5
	Reduction	4

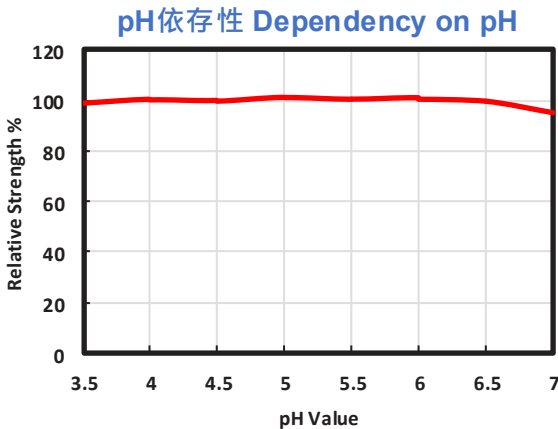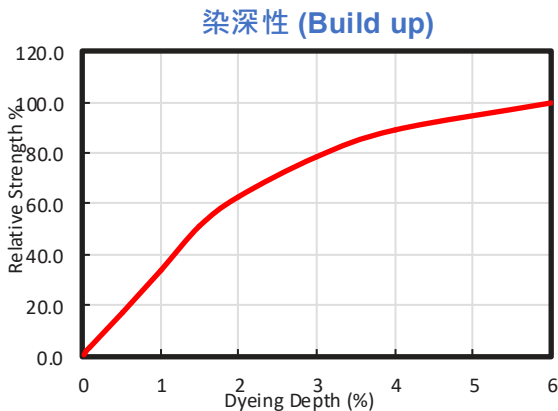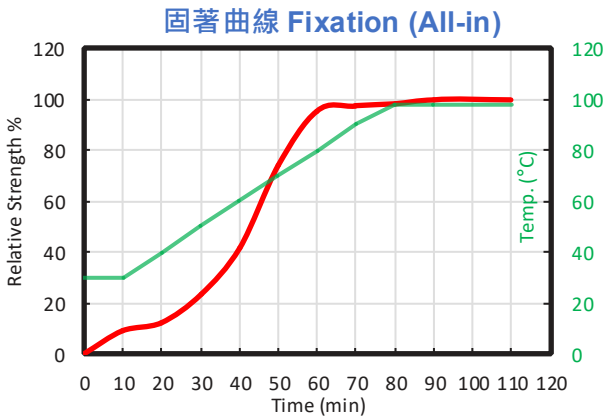

Everacid Bordeaux X-BW

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC 61-2A	1/1N	4-5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	4-5	5	5	5	5	5	5		50ppm		1
	ISO 105 C10C	1/1N	4-5	5	5	5	5	5	4-5		100ppm		1
	ISO 105 C06 B2S	1/1N	4-5	5	5	5	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		4-5	5	5	4-5	4-5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	3-45										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色	
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item				
Washing 耐水洗	AATCC 61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5	
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		1-2	
	ISO 105 C10C	1/1N	5	5	5	5	5	5	5		100ppm		1	
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	5	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5	
	Alkali 鹼		5	5	5	5	5	5	5		5		Wet 濕	5

Light Fastness (Without Fixing Treatment) 日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	> 6
	1/12N	4-5	6		Alkali 鹼		4-5	> 6
	1/3N	4-5	> 6					
	1/1N	4-5	> 6					
	2/1N	5	> 6					

Everacid Brown X-BW

Standard Depth	1/25 N	1/12 N	1/3 N	1 N	2 N
Dyeing Depth	0.12 %	0.25 %	0.49 %	0.98 %	1.96 %

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Small 小
Migration 移染性		Very poor 極差
Coverage of barré 橫條遮蓋性		Poor 差
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon > Wool 尼龍 > 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Yellower 黃味
Solubility g/l 溶解度	90°C water	50g/l
	90°C→25°C	50g/l
Color constancy 色恆性	Tungsten lamp	Y (R)
	TL84 lamp	Y (R)
Metallic ions 金屬離子	Fe 2+ 鐵	4-5
	Cu 2+ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸	3-4
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	3-4
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	3-4
	Alkaline	3
	Neutral	3
Stripping 脫色性	Oxidation	4-5
	Reduction	2-3

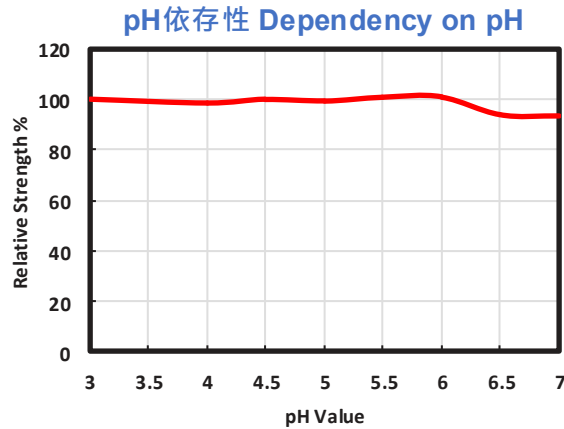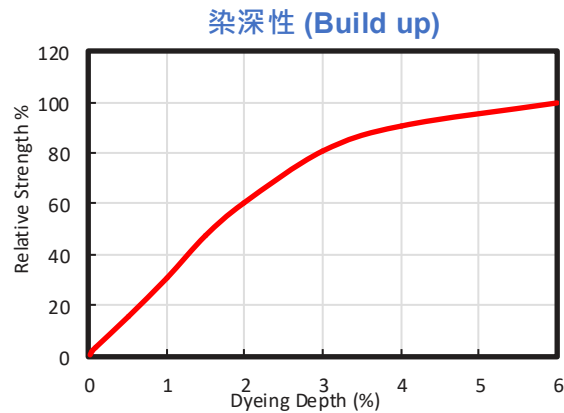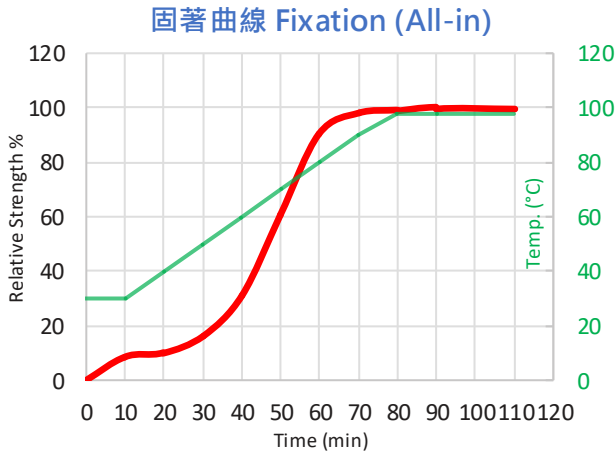

Everacid Brown X-BW

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC 61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		2-3
	ISO 105 C10C	1/1N	5	5	5	5	5	5	4-5		100ppm		1-2
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液	1/1N	5	
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC 61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		5
	ISO 105 C10C	1/1N	5	5	5	5	5	5	5		100ppm		4-5
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)

Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	5	>6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	5	>6
	1/12N	5	>6		Alkali 鹼		5	>6
	1/3N	5	>6					
	1/1N	5	>6					
	2/1N	5	>6					


Everacid Blue X-BW

Standard Depth	1/25 N	1/12 N	1/3 N	1/1 N	2/1 N
Dyeing Depth	0.13 %	0.25 %	0.50 %	1.00 %	1.20 %


Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Small 小
Migration 移染性		Very poor 極差
Coverage of barré 橫條遮蓋性		Poor 差
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Reder 紅味
Solubility g/l 溶解度	90°C water	80g/l
	90°C→25°C	80g/l
Color constancy 色恆性	Tungsten lamp	R (G)
	TL84 lamp	R (G)
Metallic ions 金屬離子	Fe ²⁺ 鐵	5
	Cu ²⁺ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸	3-4
	Cotton 棉	2
	Nylon 尼龍	1
	Polyester 聚酯	2-3
	Acrylic 壓克力	3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	1-2
	Alkaline	2-3
	Neutral	2
Stripping 脫色性	Oxidation	4-5
	Reduction	4


固著曲線 Fixation (All-in)

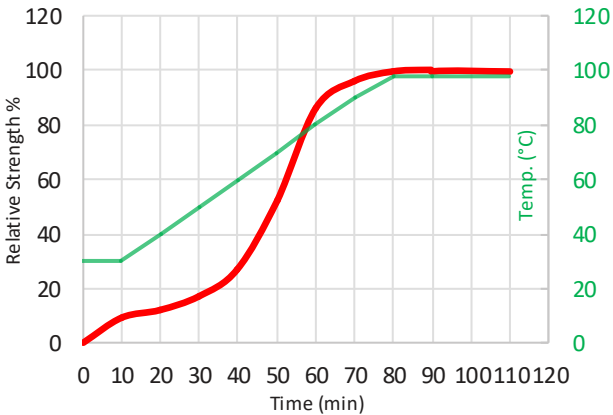

染深性 (Build up)

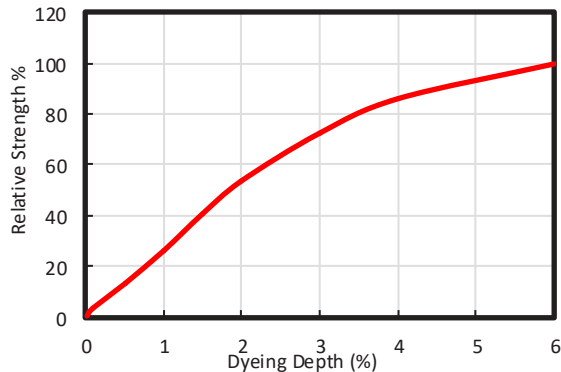

pH依存性 Dependency on pH

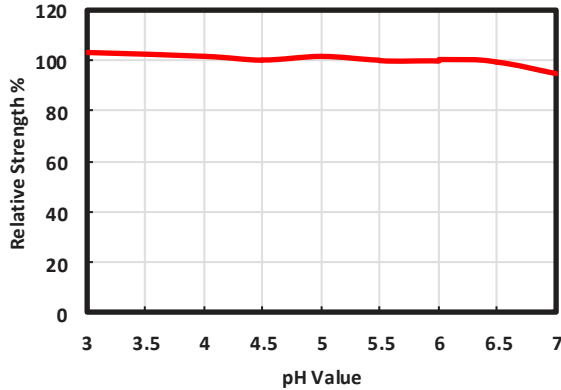

Everacid Blue X-BW

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛				
Fastness Item													
Washing 耐水洗	AATCC 61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	4-5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		2-3
	ISO 105 C10C	1/1N	5	5	5	4-5	5	5	5		100ppm		1-2
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5
Hot pressing 耐熱壓	Immediately 立即	1/1N	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛				
Fastness Item										Fastness Item			
Washing 耐水洗	AATCC 61-2A	1/1N	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	1/1 N	5
	ISO 105 C10B	1/1N	5	5	5	5	5	5	5		50ppm		4-5
	ISO 105 C10C	1/1N	5	5	5	5	5	5	5		100ppm		4
	ISO 105 C06 B2S	1/1N	5	5	5	5	5	5	5	Saliva 耐唾液		1/1N	5
Water 耐水		1/1N	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		1/1N	5
Sea Water 耐海水		1/1N	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		1/1N	5
Perspiration 耐汗	Acid 酸	1/1N	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	1/1N	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)

日光堅牢度 (未固色)




Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	>6	Perspiration Light 耐汗日光	Acid 酸	1/1 N	4-5	>6
	1/12N	4-5	>6		Alkali 鹼		4-5	>6
	1/3N	4-5	>6					
	1/1N	4-5	>6					
	2/1N	4-5	>6					

Everacid Black X-BW

Standard Depth	1/25 N	1/12 N	1/3 N	B/LK	B/DK
Dyeing Depth	0.1%	0.2%	0.4%	0.80%	1.60%

Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium 中
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon >> Wool 尼龍 >> 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Greener 綠味
Solubility g/l 溶解度	90°C water	90 g/l
	90°C→25°C	40 g/l
Color constancy 色恆性	Tungsten lamp	B (R)
	TL84 lamp	B
Metallic ions 金屬離子	Fe 2+ 鐵	5
	Cu 2+ 銅	4-5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	3-4
	Cotton 棉	2-3
	Nylon 尼龍	1
	Polyester 聚酯	3
	Acrylic 壓克力	3
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2-3
	Alkaline	3
	Neutral	2-3
Stripping 脫色性	Oxidation	5
	Reduction	4-5

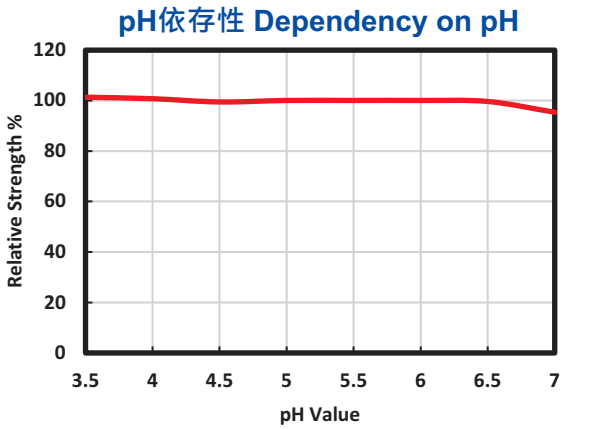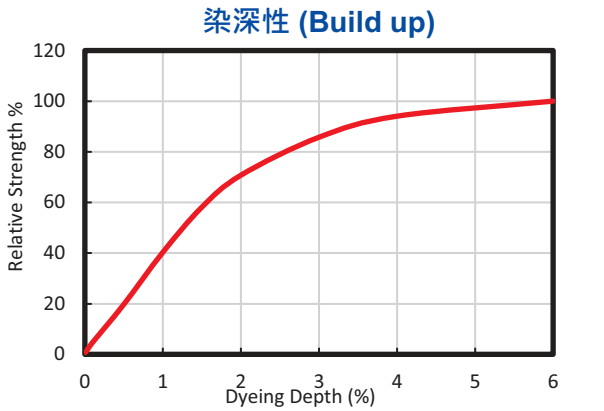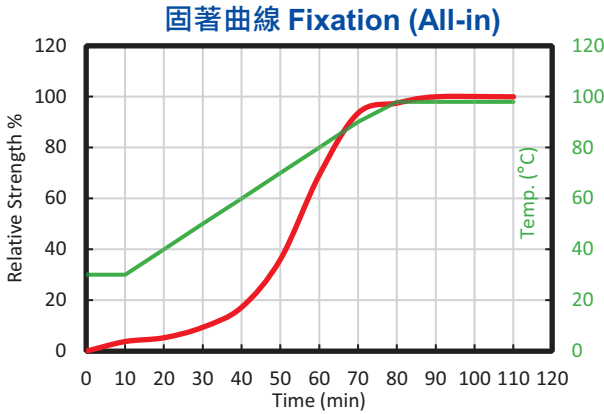

Everacid Black X-BW

Fastness before fixing treatment 固色前牢度表

Evaluation Fastness Item		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation Fastness Item		Depth of shade 染色濃度	Color Change 變褪色
				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛				
Washing 耐水洗	AATCC TM61-2A	B/DK	4-5	5	5	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	B/DK	4-5
	ISO 105 C10B	B/DK	4-5	5	5	4-5	5	5	5		50ppm		2
	ISO 105 C10C	B/DK	4-5	5	5	4	5	5	5		100ppm		1
	ISO 105 C06 B2S	B/DK	4-5	5	5	4-5	5	5	5	Saliva 耐唾液	B/DK	5	
Water 耐水		B/DK	4-5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		B/DK	5
Sea Water 耐海水		B/DK	4-5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		B/DK	4-5
Perspiration 耐汗	Acid 酸	B/DK	4-5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	B/DK	4-5
	Alkali 鹼		4-5	5	5	5	5	5	5		Wet 濕		4
Hot pressing 耐熱壓	Immediately 立即	B/DK	4										
	After 4hr. 4小時後		4-5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	B/DK	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	B/DK	5
	ISO 105 C10B	B/DK	5	5	5	5	5	5	5		50ppm		3
	ISO 105 C10C	B/DK	5	5	5	5	5	5	5		100ppm		2
	ISO 105 C06 B2S	B/DK	5	5	5	5	5	5	5	Saliva 耐唾液		B/DK	5
Water 耐水		B/DK	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		B/DK	5
Sea Water 耐海水		B/DK	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		B/DK	4-5
Perspiration 耐汗	Acid 酸	B/DK	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	B/DK	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)
日光堅牢度 (未固色)

Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	4-5	5	Perspiration Light 耐汗日光	Acid 酸	B/DK	5	6
	1/12N	4-5	6		Alkali 鹼		5	6
	1/3N	5	6					
	B/LK	5	6					
	B/DK	5	> 6					


Everacid Black X-BWE

Standard Depth	1/25 N	1/12 N	1/3 N	B/LK	B/DK
Dyeing Depth	0.1%	0.2%	0.4%	0.80%	1.60%


Dyeing Properties 特性

Characteristics		Evaluation
Strike 瞬染性		Medium to large 中 ~ 大
Migration 移染性		Poor 差
Coverage of barré 橫條遮蓋性		Good 佳
Relative dye distribution between N/W 尼龍/羊毛 相對染料分配性		Nylon > Wool 尼龍 > 羊毛
Shade on Wool compared with Nylon 羊毛/尼龍 色光比較		Bluer 藍味
Solubility g/l 溶解度	90°C water	90 g/l
	90°C→25°C	90 g/l
Color constancy 色恆性	Tungsten lamp	R
	TL84 lamp	B (R)
Metallic ions 金屬離子	Fe ²⁺ 鐵	5
	Cu ²⁺ 銅	5
Cross-Dyeing 多種纖維沾染	Spandex 彈性纖維	1
	Acetate 醋酸纖維	3
	Cotton 棉	2
	Nylon 尼龍	1
	Polyester 聚酯	2
	Acrylic 壓克力	2
	Wool 羊毛	1
Discharge ability 拔染性	Decrolin	2
	Alkaline	2-3
	Neutral	2-3
Stripping 脫色性	Oxidation	5
	Reduction	5


固著曲線 Fixation (All-in)

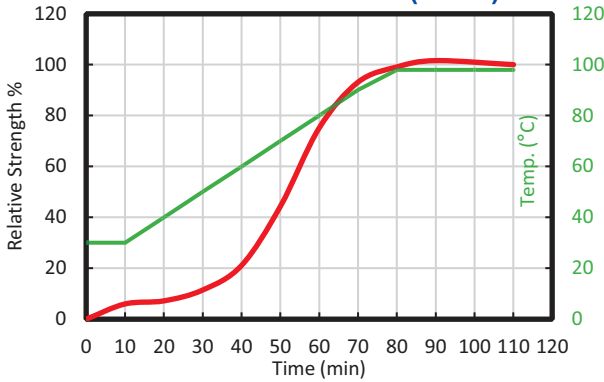

染深性 (Build up)

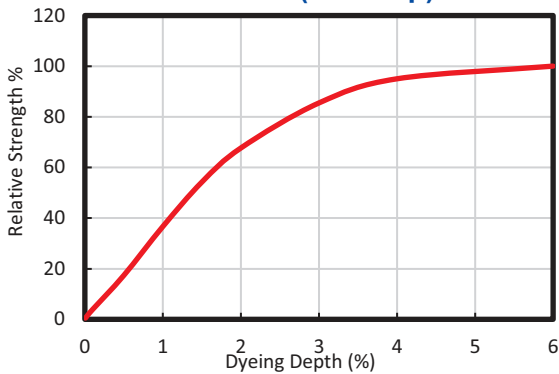

pH依存性 Dependency on pH

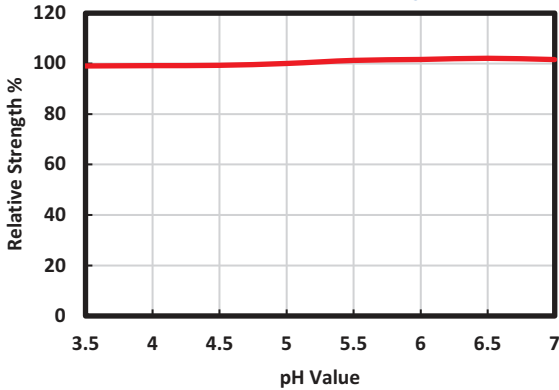

Everacid Black X-BWE

Fastness before fixing treatment 固色前牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	B/DK	4-5	5	5	4-5	5	5	5	Chlorinated Water 耐氯水	20ppm	B/DK	4-5
	ISO 105 C10B	B/DK	4-5	5	5	4	5	5	5		50ppm		3-4
	ISO 105 C10C	B/DK	4-5	5	5	3	5	5	4		100ppm		2
	ISO 105 C06 B2S	B/DK	4-5	5	5	4-5	5	5	5	Saliva 耐唾液	B/DK	5	
Water 耐水		B/DK	4-5	5	5	4-5	5	5	5	Bleeding 色泣牢度 (Daimru)		B/DK	4-5
Sea Water 耐海水		B/DK	4-5	5	5	4-5	5	5	5	Nitrogen Oxides 氣體變褪色		B/DK	4-5
Perspiration 耐汗	Acid 酸	B/DK	4-5	5	5	4-5	5	5	5	Rubbing 耐摩擦	Dry 乾	B/DK	4-5
	Alkali 鹼		4-5	5	5	4-5	4-5	5	5		Wet 濕		4
Hot pressing 耐熱壓	Immediately 立即	B/DK	4-5										
	After 4hr. 4小時後		5										

Fastness after fixing treatment 固色後牢度表

Evaluation		Depth of shade 染色濃度	Color Change 變褪色	Staining 污染						Evaluation		Depth of shade 染色濃度	Color Change 變褪色
Fastness Item				Acetate 醋酸纖維	Cotton 棉	Nylon 尼龍	Polyester 聚酯	Acrylic 壓克力	Wool 羊毛	Fastness Item			
Washing 耐水洗	AATCC TM61-2A	B/DK	5	5	5	5	5	5	5	Chlorinated Water 耐氯水	20ppm	B/DK	5
	ISO 105 C10B	B/DK	5	5	5	5	5	5	5		50ppm		4
	ISO 105 C10C	B/DK	5	5	5	5	5	5	5		100ppm		3-4
	ISO 105 C06 B2S	B/DK	5	5	5	5	5	5	5	Saliva 耐唾液		B/DK	5
Water 耐水		B/DK	5	5	5	5	5	5	5	Bleeding 色泣牢度 (Daimru)		B/DK	5
Sea Water 耐海水		B/DK	5	5	5	5	5	5	5	Nitrogen Oxides 氣體變褪色		B/DK	5
Perspiration 耐汗	Acid 酸	B/DK	5	5	5	5	5	5	5	Rubbing 耐摩擦	Dry 乾	B/DK	5
	Alkali 鹼		5	5	5	5	5	5	5		Wet 濕		5

Light Fastness (Without Fixing Treatment)

日光堅牢度 (未固色)

Evaluation	Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale	Evaluation		Dyeing Depth 染色濃度	Color Change 20AFU (AATCC)	Grade ISO Blue Scale
Artificial Light (Xenon-Arc Lamp) 耐日光	1/25N	5	5	Perspiration Light 耐汗日光	Acid 酸	B/DK	5	6
	1/12N	5	6		Alkali 鹼		5	6
	1/3N	5	6					
	B/LK	5	6					
	B/DK	5	> 6					

本資料所提供的資訊與建議是以我們最大的用心完成，但不能含括所有可能的狀況。使用相關產品或搭配其他產品時，請先自行測試。本資料並不具保證及法律效用，僅供參考使用。使用者必須自行承擔所有的風險與法律責任。

臺灣永光化學工業股份有限公司 - 技術行銷處

Warnings: The information and recommendations presented here were completed with the utmost care, but can't be extended to cover every possible case. They are intended to serve as non-binding guidelines and must be adapted to the prevailing condition. The product whether used singly or in combination with other substances, should be carried out in lab test prior to bulk production. The user needs to assume all risk and liability no matter whatsoever results are.

Issued by Everlight Chemical Industrial Corporation
Tech. Marketing & Service Div.





Everlight Chemical

Everlight Chemical Industrial Corp. (Headquarters)

臺灣永光化學工業股份有限公司

Tel: +886-2-27066006 Fax: +886-2-27081254

E-mail: sales-CCBU@ecic.com.tw

Everlight (Shanghai) Ltd.

上海德樺貿易有限公司

Tel: +86-21-62196954 Fax: +86-21-62191276

Everlight (Suzhou) Advanced Chemicals Ltd.

永光（蘇州）光電材料有限公司

Tel: +86-512-62871980 Fax: +86-512-62871217

Everlight (HongKong) Ltd.

香港永光有限公司

Tel: +852-26191095 Fax: +852-26191031

Ethical (Guangzhou) Ltd.

廣州明廣貿易有限公司

Tel: +86-20-38497030 Fax: +86-20-38497031

Qingdao Office

青島分公司

Tel: +86-532-85016051 Fax: +86-532-85016063

Tianjin Office

天津分公司

Tel: +86-22-23202016 Fax: +86-22-23202015

Everlight U.S.A.

美國永光公司

Tel: +1-704-5881004 Fax: +1-704-5880051

Everlight Europe B.V. (Netherlands)

荷蘭永光公司

Tel: +31-10-2380099 Fax: +31-10-2380090

Elite Foreign Trading Inc. (Turkey)

土耳其 Elite 公司

Tel: +90-324-2377789 Fax: +90-324-2370246

Everlight Chemicals (Vietnam) Co., Ltd.

越南永光公司

Tel: +84-28-3821-2969 Fax: +84-28-3636-8375

Technical Marketing & Service Division

技術行銷處

Tel: +886-3-4838088 E-mail: ccbu-tms@ecic.com.tw



bluesign
SYSTEM PARTNER