Everlight Chemical


臺灣永光化學工業股份有限公司

EVERLIGHT CHEMICAL INDUSTRIAL CORPORATION

Tel: +886-2-27066006 Fax: +886-2-27081254

E-mail: sales-CCBU@ecic.com.tw

**Everlight (Shanghai) Ltd.**
上海德樺貿易有限公司
Tel: +86-21-62196954 Fax: +86-21-62191276

**Ethical (Shanghai) Ltd.**
上海明德貿易有限公司
Tel: +86-21-62196954 Fax: +86-21-62191276

**Everlight (Suzhou) Advanced Chemicals Ltd.**
永光（蘇州）光電材料有限公司
Tel: +86-512-62871980 Fax: +86-512-62871217

**Everlight (HongKong) Ltd.**
香港永光有限公司
Tel: +852-26191095 Fax: +852-26191031

**Ethical (Guangzhou) Ltd.**
廣州明廣貿易有限公司
Tel: +86-20-38497030 Fax: +86-20-38497031

**Qingdao Office**
青島分公司
Tel: +86-532-85016051 Fax: +86-532-85016063

**Tianjin Office**
天津分公司
Tel: +86-22-23202016 Fax: +86-22-23202015

**Everlight U.S.A.**
美國永光公司
Tel: +1-704-5881004 Fax: +1-704-5880051

**Everlight Europe B.V. (Netherlands)**
荷蘭永光公司
Tel: +31-10-2380099 Fax: +31-10-2380090

**Elite Foreign Trading Inc. (Turkey)**
土耳其 Elite 公司
Tel: +90-324-2377789 Fax: +90-324-2370246

**Everlight Chemicals (Vietnam) Co., Ltd.**
越南永光公司
Tel: +84-28-3520-2761 Fax: +84-28-3520-2779

**Technical Marketing & Service Division**
技術行銷處
Tel: +886-3-4838088 E-mail: ccbu-tms@ecic.com.tw



***警語：**本資料所提供的資訊與建議是以我們最大的用心完成，但不能涵括所有可能的狀況。使用相關產品或搭配其他產品時，請先自行測試。本資料並不具保證及法律效用，僅供參考使用。使用者必須自行承擔所有的風險與法律責任。*

***Warnings:** The information and recommendations presented here were completed with the utmost care, but can't be extended to cover every possible case. They are intended to serve as non-binding guidelines and must be adapted to the prevailing condition. The product whether used singly or in combination with other substances, should be carried out in lab test prior to bulk production. The user needs to assume all risk and liability no matter whatsover results are.*




Frist Edition Aug. 2021
RE-MWF-BR-002CE, May 2023, 930


# Everzol® Black MWF

全新進化的反應性黑色染料
滿足耐多次洗滌高牢度需求，同時保持黑色深度

A great stride forward in dyeing reactive black
For home multi-laundering fastness, and retains black lasting

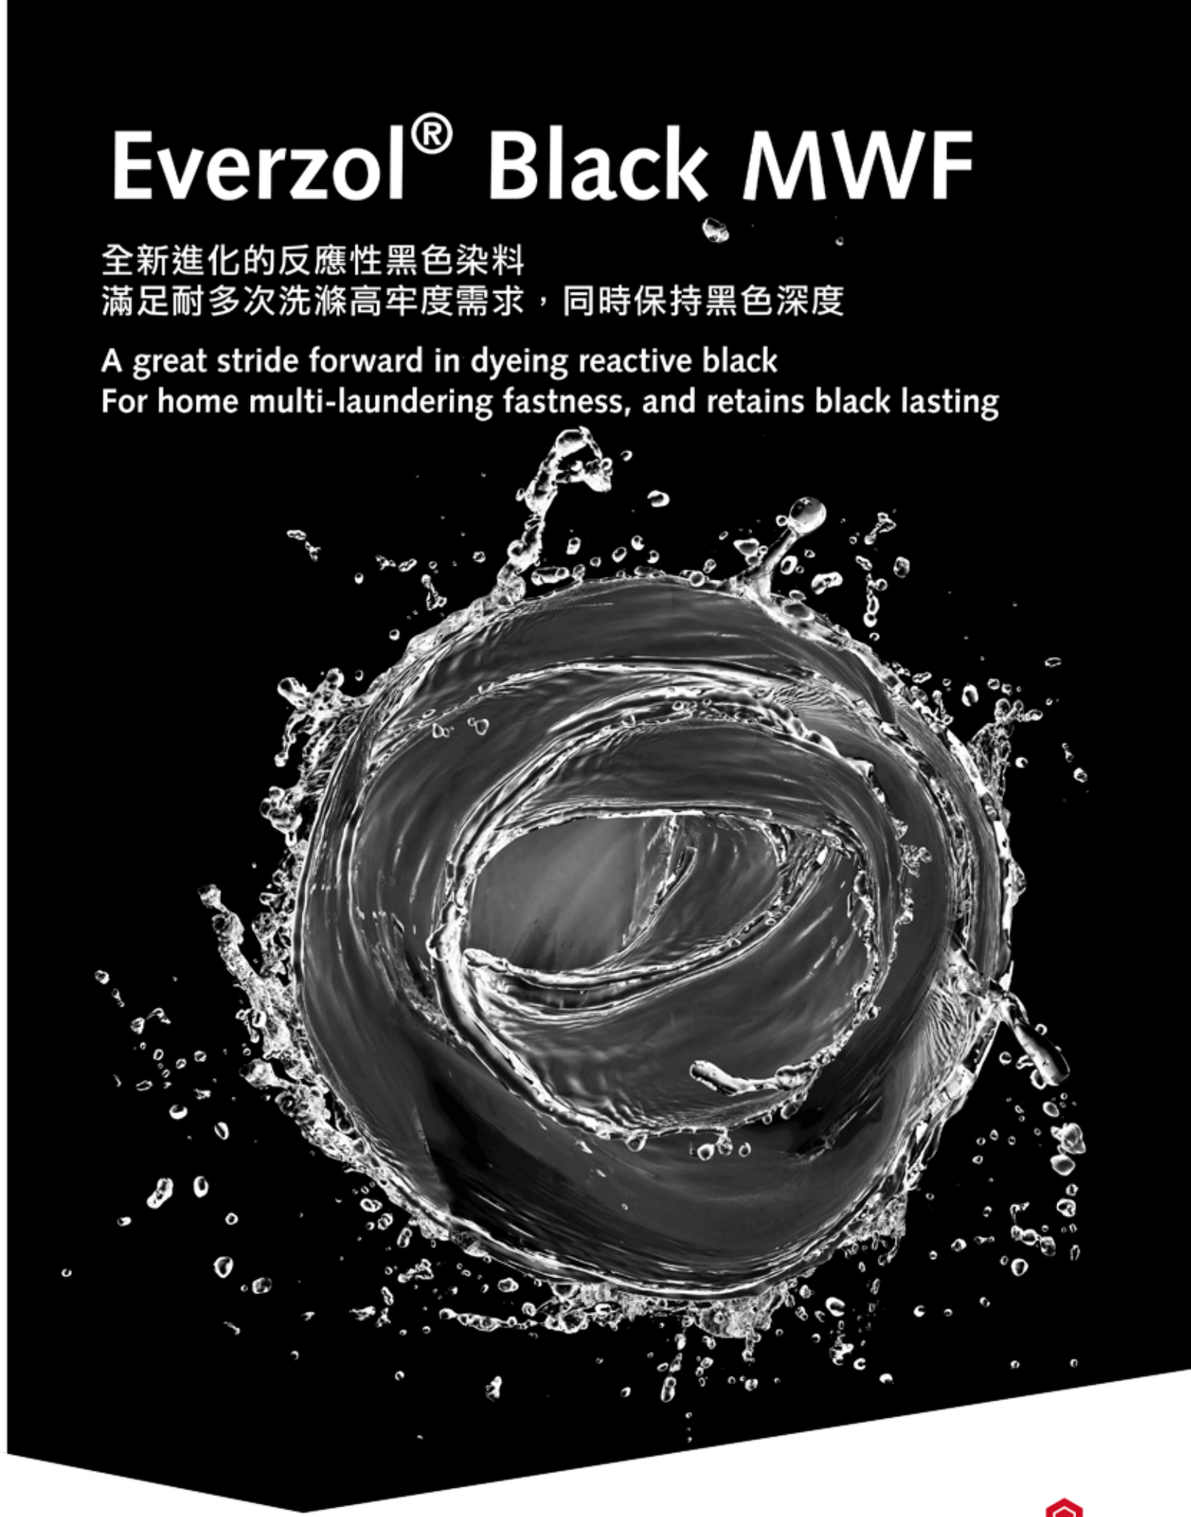

Better Chemistry Better Life

Everlight Chemical

# ▶ Everzol® Black MWF

要求 ISO 105-C09 或 M&S C10A 耐洗牢度的紡織品，受其氧化漂白反應影響，往往造成顏色褪色與色相變化，尤其是反應性黑色染料的不足特別被提出討論，Everzol Black MWF 的優異特性是此類牢度需求的完美解決方案。

## 特色：

- 氧化性漂白劑洗滌對應方案，對家用和商業洗滌具有極佳的顏色堅牢度。
- 良好的耐氯水牢度。
- 適用於 Everzol ERC Solution 洗程可達特定牢度要求。
- 優異的耐鹼與染液安定性，廣泛應用於 CPB 與連續染色等製程。

Textiles requiring for laundry fastness of ISO 105-C09 or M&S C10A, affecting by oxidative bleaching reaction will cause color fading and hue variation, especially reactive blacks which fastness issue has been widely discussed. Everzol Black MWF which excellent performance makes it a perfect solution to this fastness requirement.

## Features

- Outstanding fastness to domestic and commercial laundering in response to oxidative bleach.
- High fastness to chlorinated water.
- Suitable for Everzol ERC Solution washing off process in exhaust dyeing.
- Excellent alkali stability in cold pad-batch dyeing, and robust to continuous dyeing parameters variations.








### 染程適用性 / Dyeing Applications


| 浸染 60℃ Exhaust 60℃ | 吉革染色 60℃ Jigger 60℃ | 連續染色 Continuous | 冷壓染色 CPB | 拔染 / Discharge 中性 / Neutral | 拔染 / Discharge 鹼性 / Alkaline |
|---|---|---|---|---|---|
| ◎ | ◎ | ◎ | ◎ | ○ | ○ |

Key : ◎ excellent ○ good △ moderate ---not recommended
CPB batching time recommendation ： 8 hours and longer

### 牢度與特性 / Fastness & Properties

| Color Fastness | Dyeing Depth | Color Change | Color Fastness | | Dyeing Depth | Color Change |
|---|---|---|---|---|---|---|
| Fastness to domestic and commercial laundering ISO 105-C09 | 6% | 4-5 | Fastness to Chlorinated water ISO 105-E03 | 20ppm | 6% | 4-5 |
| | | | | 50ppm | 6% | 4 |

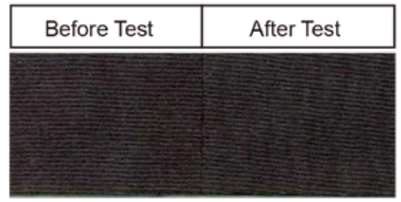

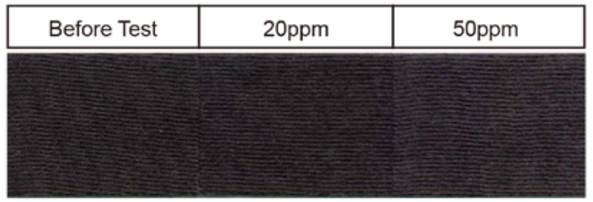
| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Solubility in water (g/l) 25℃ | 100 | | | | Fastness to artificial light ISO 105-B02 (blue scale) | | 6% | 5 |
| Solubility in alkali (g/l) silicate free / silicate | 80 / 80 | | | | Fastness to light: Xenon-Arc AATCC 16.3-3 20AFU (color change) | | 6% | 4 |
| Fastness to washing ISO 105 C06-C2S | 6% | CH 4-5 | CO 4-5 | N 5 | Fastness to saliva DIN 53160 | | 6% | 5 |
| Fastness to water ISO 105 E01 | 6% | CH 4-5 | CO 5 | N 5 | Fastness to rubbing ISO 105-X12 | Dry | 6% | 4-5 |
| | | | | | | Wet | 6% | 2-3 |
| Post mercerizing ISO 105-X04 | 6% | CH 3-4 | CO 4-5 | - | Fastness to perspiration ISO 105-E04 | Acid | 6% | CO 5 / N 5 |
| | | | | | | Alkali | 6% | CO 5 / N 5 |

CH ： color change　CO ： stain on cotton　N ： stain on nylon