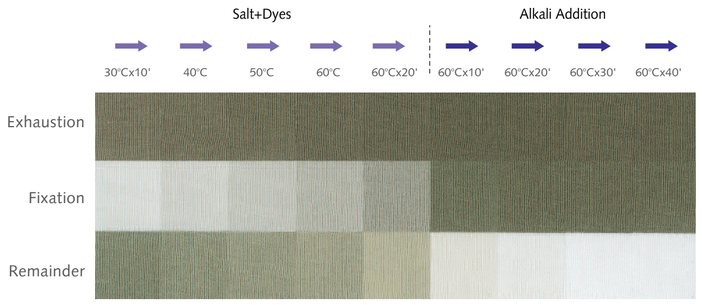
Everzol CS Confident Fastness Performance

Conventional Dyes	Everzol CS Dyes	High Lightfastness Dyes
Chlorinated Water Fastness - ISO 105 E03 (active chlorine 20ppm)		
Before ← → After 	Before ← → After 	Before ← → After 
Color Change: 4-5	Color Change: 4-5	Color Change: 1-2
Colorfastness to Light - AATCC 16-3, 20AFU		
Before ← → After 	Before ← → After 	Before ← → After 
Color Change: 2	Color Change: 4-5	Color Change: 4-5

Everzol CS dyes - Exceptional Dyeing Compatibility (exhaust dyeing)



Everlight Chemical

臺灣永光化學工業股份有限公司

EVERLIGHT CHEMICAL INDUSTRIAL CORPORATION

Tel: +886-2-27066006 Fax: +886-2-27081254

E-mail: sales-CCBU@ecic.com.tw

Everlight (Shanghai) Ltd.
上海德樺貿易有限公司
Tel: +86-21-62196954 Fax: +86-21-62191276

Everlight (Suzhou) Advanced Chemicals Ltd.
永光（蘇州）光電材料有限公司
Tel: +86-512-62871980 Fax: +86-512-62871217

Everlight (HongKong) Ltd.
香港永光有限公司
Tel: +852-26191095 Fax: +852-26191031

Ethical (Guangzhou) Ltd.
廣州明廣貿易有限公司
Tel: +86-20-38497030 Fax: +86-20-38497031

Qingdao Office
青島分公司
Tel: +86-532-85016051 Fax: +86-532-85016063

Tianjin Office
天津分公司
Tel: +86-22-23202016 Fax: +86-22-23202015

Everlight USA, Inc.
美國永光公司
Tel: +1-704-5881004 Fax: +1-704-5880051

Everlight Europe B.V. (Netherlands)
荷蘭永光公司
Tel: +31-10-2380099 Fax: +31-10-2380090

Elite Foreign Trading Inc. (Turkey)
土耳其 Elite 公司
Tel: +90-324-2377789 Fax: +90-324-2370246

Everlight Chemicals (Vietnam) Co., Ltd.
越南永光公司
Tel: +84-28-3520-2761 Fax: +84-28-3636-8375

Technical Marketing & Service Division
技術行銷處
Tel: +886-3-4838088 E-mail: ccbu-tms@ecic.com.tw

警語：*本資料所提供的資訊與建議是以我們最大的用心完成，但不能涵括所有可能的狀況。使用相關產品或搭配其他產品時，請先自行測試。本資料並不具保證及法律效用，僅供參考使用。使用者必須自行承擔所有的風險與法律責任。*

Warnings: *The information and recommendations presented here were completed with the utmost care, but can't be extended to cover every possible case. They are intended to serve as non-binding guidelines and must be adapted to the prevailing condition. The product whether used singly or in combination with other substances, should be carried out in lab test prior to bulk production. The user needs to assume all risk and liability no matter whatsover results are.*

bluesign SYSTEM PARTNER

July 2025

Everzol® CS Dyes

敏感色系染色最佳解決方案

Critical Color Solution



Everlight Chemical



Everzol CS 反應性染料－解決敏感色的專家

Everzl CS 反應性染料是以三次色原理解決敏感色染色時常遭遇的問題，並同時兼具淺色敏感色所需優異的牢度性能。

Everzol CS 反應性染料以創新染料研發科技所生產，提供染整業者更佳的競爭力：

- 高效率的配色速度
- 對染色因子變化穩定
- 減少重修風險
- 減少染料品項管理成本
- 節能減排性
- 無光致變色性

Everzol CS dyes - Critical Colors Solution

Everzol CS dyes is technically based on concept of tertiary color for trouble-shooting of critical shades dyeing with highfastness demands.

- Exceptional levelness performance
- Confident lab to bulk Right First Time & reproducibility
- Eliminating reprocessing risk
- Excellent lighfastness & chlorinated water fastness
- Non-photochromism

Everzol CS Dyes



- 無頭尾異色－在正常條件下染色
- 高一次對色性與再現性
- 無雙面色差
- 無光致變性



- No tailing - when dyeing under normal oper-ating conditions
- Outstanding Right First Time performance
- No face-back sidedness
- Non-photochromism




牢度 Colorfastness

Fastness / Everzol CS	Solubility (g/l)	Solubility in Alkali (g/l)		Chlorinated Water ISO 105 E03	M&S C10A (UK-TO)	Light AATCC 16-3 (color change)						Light ISO 105 B02 (blue scale)	Perspiration Light ISO 105 B07 (blue scale)	
						20AFU		40AFU		60AFU				
		Silicate free method	Sodium Silicate method	20ppm	Color Change	5 g/l	20 g/l	5 g/l	20 g/l	5 g/l	20 g/l		Acid	Alkali
Yellow CS	100	80	80	4-5	5	4-5	4-5	4-5	4-5	4	4	6	5-6	5-6
Orange CS	100	60	80	4-5	4-5	4-5	4-5	4-5	4-5	4	4	6	5-6	5-6
Red Brown CS	100	80	80	4	4-5	4-5	4-5	4-5	4-5	4	4	5-6	5	4-5
Olive CS*	100	50	60	4-5	5	4-5	4-5	4-5	4-5	4	4-5	6	5	4
Grey CS*	100	80	80	2-3	4-5	4-5	4-5	4	4-5	4	4	5-6	4-5	4
GreyLF*	100	100	100	3	4-5	4-5	4-5	4	4-5	4	4	5-6	5	5

牢度試驗染色濃度：10g/l，其中耐日光牢度 AATCC 16-3 試驗染色濃度為 5g/l 及 20g/l，以上牢度資料測自後整理加工前。
Rating fastness at color depth 10g/l, except fastness to AATCC 16-3. Achieved fastness data before finishing treatment.
* 這是金屬錯合染料，請貴公司使用前，先確認是否會因染色濃度造成不符合貴公司之管制規定。
* This is a metal-complex product, before use must confirm whether caused non-compliance due to dye concentration.

敏感色系與磨毛織物之冷壓染染色

Everzol CS 染料與其組合具同步上色機制，特別適用於敏感色與磨毛織物的染色。以下結果顯示，Everzol CS 染料具有良好的染料相容性與配伍性以及優異的染色再現性，特別在壓吸及固著過程中可避免頭尾色差及雙面色相差異。

Khaki shade		Olive shade		Grey shade	
Face / Back		Face / Back		Face / Back	
					
Everzol Yellow CS	3.0g/l	Everzol Yellow CS	2.0g/l	Everzol Yellow CS	3.0g/l
Everzol Red Brown CS	3.0g/l	Everzol Red Brown CS	2.0g/l	Everzol Red Brown CS	3.0g/l
Everzol Olive CS	4.0g/l	Everzol Olive CS	6.0g/l	Everzol Gery CS	14.0g/l

Dyeing on Emerized Fabric for Critical Color by Cold Pad-Batch.

The emerized fabric without face-back sidedness thanks to combination of Everzol CS dyes has synchronal uptake mechanism to fabric.
The result shown above that excellent compatibility of Everzol CS dyes performing high reproducibity and practically trouble-free of tailing or shade variation during the padding and fixation.





