
Tinctorial strength & Washing off




Conventional (VS + MCT)

Yellow	3RF	150%	5.74%
Red	3BF	150%	4.60%
Navy	BF		2.08%
Total:			12.42%



Everzol ED


Yellow	ED	1.5%
Red	ED	3.0%
Navy	ED	1.5%
Total:		6.0%



Everzol ED Innovative

Orange	ED-4R	1.87%
Red	ED-7BN	0.92%
Blue	L-ED	1.93%
Total:		4.72%









Exhaust dyeing

Recommended dyeing at 60℃ with a typical dyeing process.



COD in effluent



Based on the same color strength on fabric.

Everlight Chemical

臺灣永光化學工業股份有限公司

EVERLIGHT CHEMICAL INDUSTRIAL CORPORATION

Tel: +886-2-27066006 Fax: +886-2-27081254

E-mail: sales-CCBU@ecic.com.tw

Everlight (Shanghai) Ltd.
上海德樺貿易有限公司
Tel: +86-21-62196954 Fax: +86-21-62191276

Everlight (Suzhou) Advanced Chemicals Ltd.
永光（蘇州）光電材料有限公司
Tel: +86-512-62871980 Fax: +86-512-62871217

Everlight (HongKong) Ltd.
香港永光有限公司
Tel: +852-26191095 Fax: +852-26191031

Ethical (Guangzhou) Ltd.
廣州明廣貿易有限公司
Tel: +86-20-38497030 Fax: +86-20-38497031

Qingdao Office
青島分公司
Tel: +86-532-85016051 Fax: +86-532-85016063

Tianjin Office
天津分公司
Tel: +86-22-23202016 Fax: +86-22-23202015

Everlight USA, Inc.
美國永光公司
Tel: +1-704-5881004 Fax: +1-704-5880051

Everlight Europe B.V. (Netherlands)
荷蘭永光公司
Tel: +31-10-2380099 Fax: +31-10-2380090

Elite Foreign Trading Inc. (Turkey)
土耳其 Elite 公司
Tel: +90-324-2377789 Fax: +90-324-2370246

Everlight Chemicals (Vietnam) Co., Ltd.
越南永光公司
Tel: +84-28-3520-2761 Fax: +84-28-3636-8375

Technical Marketing & Service Division
技術行銷處
Tel: +886-3-4838088 E-mail: ccbu-tms@ecic.com.tw

警語：*本資料所提供的資訊與建議是以我們最大的用心完成，但不能涵括所有可能的狀況。使用相關產品或搭配其他產品時，請先自行測試。本資料並不具保證及法律效用，僅供參考使用。使用者必須自行承擔所有的風險與法律責任。*

Warnings: *The information and recommendations presented here were completed with the utmost care, but can't be extended to cover every possible case. They are intended to serve as non-binding guidelines and must be adapted to the prevailing condition. The product whether used singly or in combination with other substances, should be carried out in lab test prior to bulk production. The user needs to assume all risk and liability no matter whatsoever results are.*

bluesign SYSTEM PARTNER

July 2025

Everzol® ED

反應性染料

超強色值、經濟、效率、生態環保

A Novel Reactive Dyestuff Range with Superb Color Yield and Eco Efficiency

浸染 / 冷壓染與連續式染色

Exhaust Dyeing

Cold Pad-Batch and Continuous Dyeing

Everlight Chemical

Everzol ED 反應性染料具極高之色值，在生產過程產生經濟、環保、節能、減排的效益。
主要應用於纖維素織物之 60℃ 浸染，大部分產品亦可使用於冷壓染與連續式染色應用。

Everzol ED 之產品特色

經濟、效率

- 高色值、高吸收與高固著。
- 相較於傳統染料僅 1/2 之用量即可達到相當之深度。

環保

- 固著率高，染後易水洗，廢水低。
- 溫染型染料，染法簡易，節能環保。

高性能

- 與 Everzol & Everzol ED 相容性良好。
- 均染性及再現性佳。
- 大部分產品可應用於冷壓染與連續式染色，有效預防頭尾異色發生。

Everzol ED dyes possesses excellent build-up which benefits the synergy effect of cost-effectiveness, environmental friendly, energy savings and less CO_2 emission. Mainly designed for cellulose fiber dyeing at 60℃, and selected items suitable for continuous dyeing and Cold Pad-Batch.

Everzol ED dyes provides the following advantages

Cost-effective, Efficient

- Superb color yield and high fixation.
- Smaller quantities of dyes (ca. 50-60%) required than conventional dyes.

Environmental Friendly

- High fixation & easy wash-off.
- Warm dyeing & energy savings, excellent performance.

Excellent performance

- Excellent compatibility with the complete Everzol & Everzol ED range.
- Excellent reproducibility.
- Selected dyes sutiable for continuous dyeing and C.P.B. and less tailing problem.

Trichromatic for medium to dark colors

Everzol Yellow ED-R
Everzol Red ED-3B
Everzol Blue L-ED

Trichromatic for green colors

Everzol Yellow ED-2G
Everzol Blue ED-G
Everzol Turq. Blue G 133%

Trouble-shooting for crush mark & layer difference

Everzol Orange ED-4R
Everzol Red ED-7BN
Everzol Blue L-ED
(Supplementary: Everzol Yellow ED、Yellow ED-R)

Trichromatic for very dark colors

Everzol Orange ED-4R
Everzol Red ED-7BN
Everzol Navy ED


Fastness

Fastness / Everzol ED	Solubility in Alkali (g/l)		Washing ISO 105-C10 B		Perspiration ISO 105-E04				Chlorinated Water ISO 105-E03 (20 ppm)	Rubbing ISO 105-X12		Lightfastness ISO 105-B02 (blue scale)
					Acid		Alkali					
	Silicate free method	Sodium Silicate method	Co	PA	Co	PA	Co	PA		Dry	Wet	
Yellow ED-2G	-	-	5	5	5	5	5	5	3	5	3-4	>6
Yellow ED-R	100	100	4-5	5	4-5	5	4-5	5	2-3	5	3-4	>6
Yellow ED	100	100	4-5	5	4	5	4	4-5	2	5	3-4	>6
Yellow ED-S(3)	-	-	5	5	5	5	5	5	3	4-5	3-4	6
Orange ED-N	30	30	4	5	5	5	4-5	5	2-3	4-5	2-3	6
Orange ED-2R	-	-	4	5	4-5	5	4-5	5	4-5	5	3	4
Orange ED-4R(1)	30	60	4-5	5	4-5	4-5	4-5	4-5	4-5	4-5	3	5-6
Red ED(2)	100	100	4-5	5	4	5	4	5	3-4	5	3	4-5
Red ED-2B	100	100	4-5	5	4-5	5	4	5	3	5	2-3	5
Red ED-3B	100	100	4-5	5	4	5	4	4-5	4	5	3	5
Red ED-7BN	100	100	4-5	5	5	5	5	5	4-5	4-5	2-3	5-6
Red ED-S	100	100	4-5	5	5	5	5	5	4-5	4-5	2	6
Rubine ED(2)	80	100	3-4	5	3-4	3	4	4	3-4	4	2-3	5
Blue ED-G	100	100	4-5	5	4-5	4-5	4-5	5	1	5	2-3	>6
Blue L-ED(1)	100	100	4	5	5	5	4-5	4-5	3	4-5	3	5
Blue ED	100	100	5	5	4-5	4	4-5	4-5	4	4-5	2-3	5
Navy ED	100	100	5	5	5	5	5	4-5	3-4	4-5	2-3	4-5
Black ED	80	80	5	4-5	5	5	5	5	4	4	2-3	5-6
Black ED-2R	-	-	4	5	4-5	4-5	4-5	4-5	3-4	4	2-3	5-6
Black ED-G	100	100	4-5	5	5	5	5	5	4	4-5	2-3	6
Black ED-R	100	100	5	5	5	5	5	5	4	4	2-3	5-6
Black EDN	100	100	5	5	5	5	4-5	5	4	4-5	2-3	5-6
Black ED-3R	100	100	5	5	5	5	5	5	4	4	2-3	5-6

Tested at 3% o.w.f. (Navy & Black 6% o.w.f.)

備註：(1) 這是金屬錯合染料，請貴公司使用前，先確認是否會因染色濃度造成不符合貴公司之管制規定。
(2) 使用吐司酸 (Tobias acid, CAS No. 81-16-3) 作為原料合成染料，會經由還原裂解檢測方法而產生 2- 萘胺 (2-naphthylamine, CAS No.91-59-8) 的假陽性測試結果。請貴公司使用前，先確認是否會因染色濃度造成不符合貴公司之管制規定。
(3) Yellow ED-S 施以樹脂加工，須注意其色變、日光牢度及受氧化還原化學物質之色變。

Notes: (1) This is a metal-complex product, before use must confirm whether caused non-compliance due to dye concentration.
(2) The false-positive testing result of 2-naphthylamine from dyestuff might occur owing to Tobias acid as a raw material of dye. Before use must confirm whether caused non-compliance due to dye concentration.
(3) Yellow ED-S: Precaution of lightfastness and color change after resin treatment, or under the presence of oxidative/reductive chemicals.

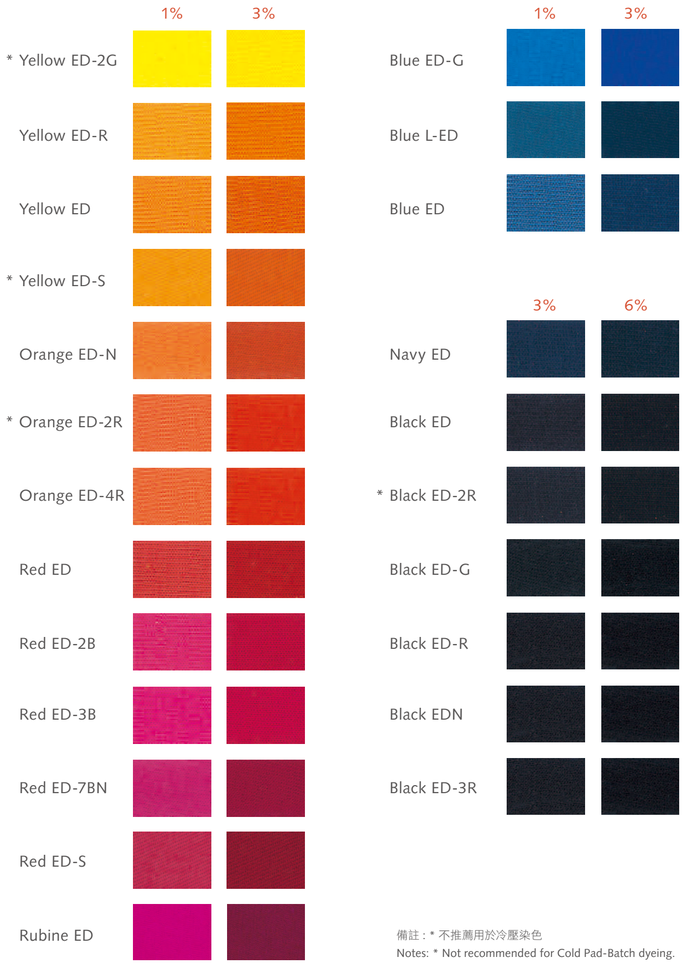

備註：* 不推薦用於冷壓染色
Notes: * Not recommended for Cold Pad-Batch dyeing.