tianocore

UEFI & EDK II Training

Platform Configuration Database (PCD)

tianocore.org

LESSON OBJECTIVE

- Define Platform Configuration Database (PCD) and explain the syntax
- Differentiate types of PCDs
- Explain how changing a PCD value affects output
- Evaluate the results of a PCD value modification
- Special PCDs

tianocore

PCD OVERVIEW

tianocore

EDK II PCD's Purpose and Goals

Documentaton : MdeModulePkg/Universal/PCD/Dxe/Pcd.inf

Purpose

- Establishes platform common definitions
- Build-time/Run-time aspects
- Binary Editing Capabilities

Goals

- Simplify porting
- Easy to associate with a module or platform

EDK II PCD's Purpose and Goals

Documentaton : MdeModulePkg/Universal/PCD/Dxe/Pcd.inf

```
//////////////////////////////////////////////////////////////////////////
//                                                                      //
//                      Introduction of PCD database                    //
//                                                                      //
//////////////////////////////////////////////////////////////////////////

1, Introduction
   PCD database hold all dynamic type PCD information. The structure of PEI PCD
   database is generated by build tools according to dynamic PCD usage for
   specified platform.

2, Dynamic Type PCD
   Dynamic type PCD is used for the configuration/setting which value is determined
   dynamic. In contrast, the value of static type PCD (FeatureFlag, FixedPcd,
   PatchablePcd) is fixed in final generated FD image in build time.
```

See Link above to view the entire documentation

tianocore

PCD TYPES

FixedAtBuild

Dynamic

PatchableInModule

DyanmicEx

FeatureFlag

DynamicHii

DynamicVpd

Syntax Examples

```
[pcdsFeatureFlag.common] [pcdsFixedAtBuild.IA32]
[PcdsFixedAtBuild, PcdsPatchableInModule, PcdsDynamic,
PcdsDynamicEx]
```

tianocore

UEFI Platform Initialization (PI) 1.x Spec & PCDs

PEI

- PCD PEIM produces PCD database
- Two PCD PPIs: `PCD_PPI` and `EFI_PEI_PCD_PPI`

DXE

- DXE Driver Manages PCDs
- Two PCD Protocols: `PCD_PROTOCOL` and `EFI_PCD_PROTOCOL`

PCD LIBRARY

- Provides interface for PCDs
- PCD PPI - PEI
- PCD Protocol – DXE
- Allows access to data

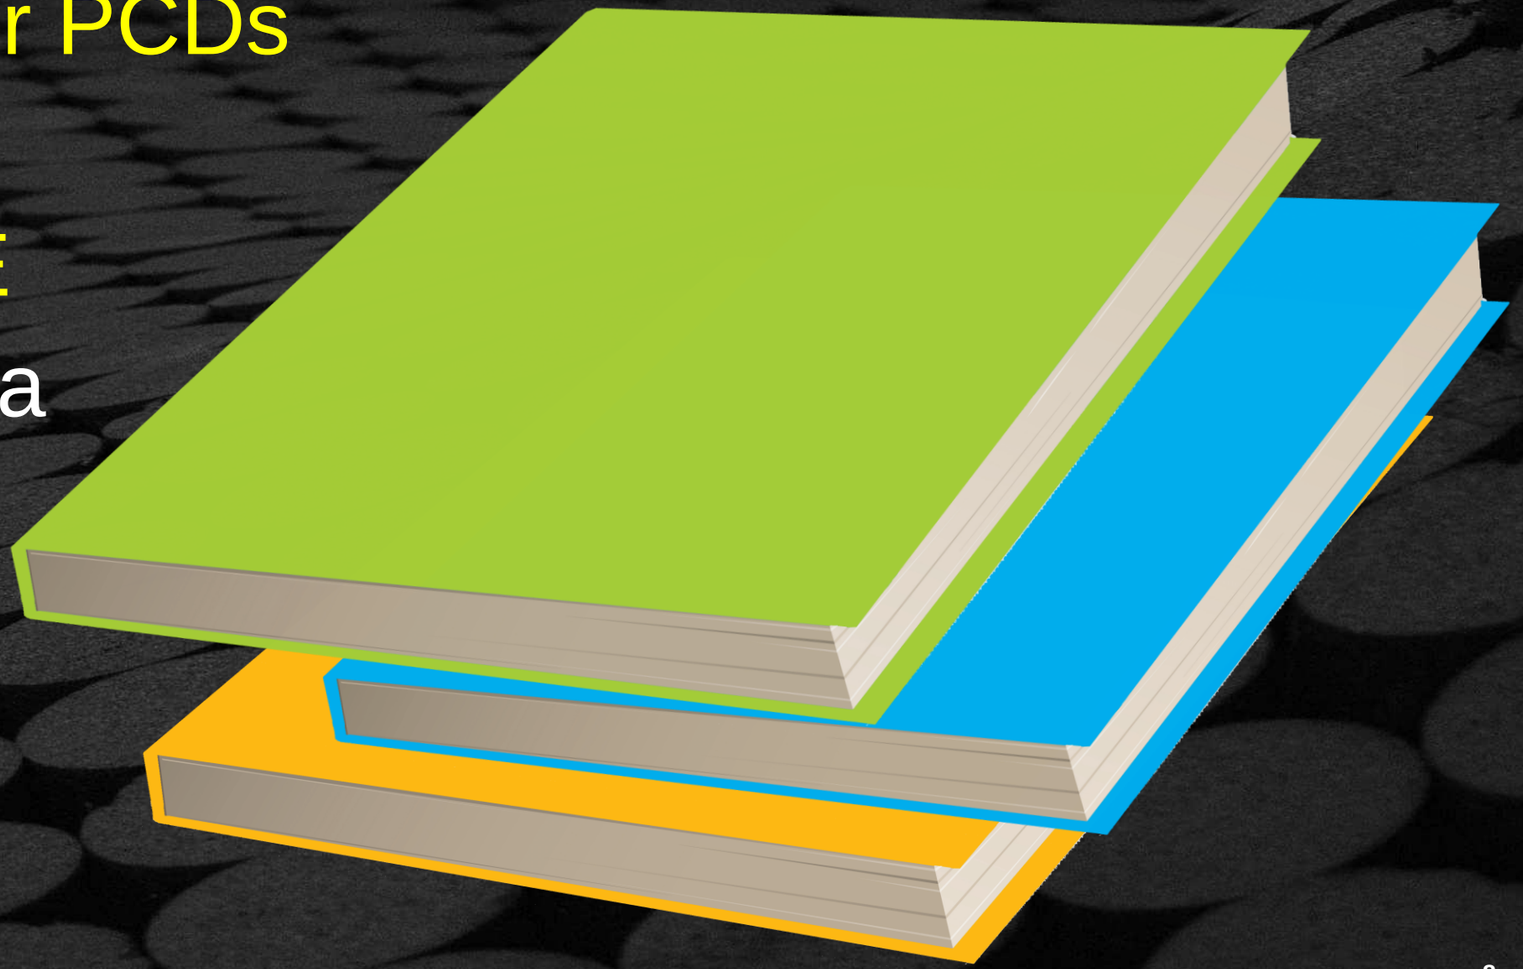

PCD LIBRARY CALLS: PCD PROTOCOL AND PCD PPI FUNCTIONS

```
PcdGetXX()
PcdSetXX()
PcdGetExXX()
PcdSetExXX()
PcdToken()
PCDSetSku()
PcdGetNextToken()
PcdGetNextTokenSpace()
CallBackOnSet()
CancelCallBack()
```

Where “XX” =

```
8
16
32
Size
Ptr
Boolean
```

tianocore

PCD SYNTAX

PCDs can be located anywhere within the Workspace even though a different package will use those PCDs for a given project

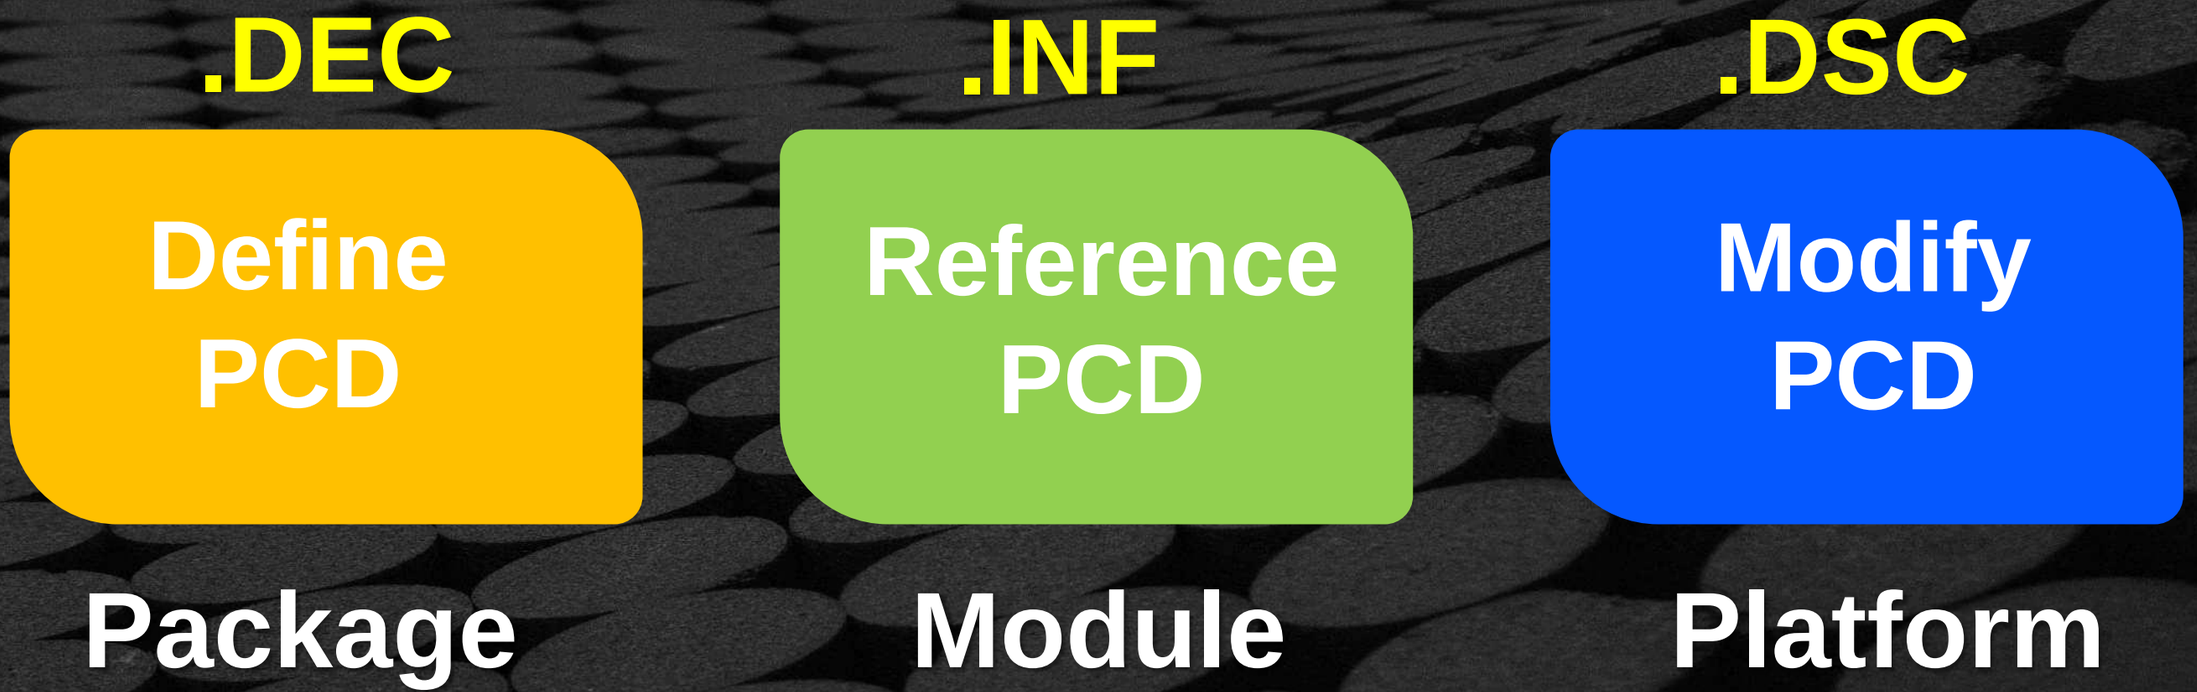

PCD SYNTAX EXAMPLE

PCD defined in the DEC file from any package

```
[Guids.common]
PcdTokenSpaceGuidName={ 0xXXXXXXXX, 0xXXXX, 0xXXXX, { 0xXX, . . .}}

.  .  .
[Pcds...]
PcdTokenSpaceGuidName.PcdTokenName|Value[|DatumType[|MaxSize]]|Token
```

PCD usage listed in INF file for module

```
[…Pcd…]
PcdTokenSpaceGuidName.PcdTokenName|[Value]
```

Value of PCD set in Platform DSC

```
[Pcds...]
PcdTokenSpaceGuidName.PcdTokenName|Value[|DatumType[|MaximumDatumSize]]
```

tianocore

PCD VARIABLE EXAMPLE

Defined

```
[PcdsFixedAtBuild, PcdsPatchableInModule]
gEfiMdeModulePkgTokenSpaceGuid.PcdMaxVariableSize|0x400|UINT32|0x30000003
```

Referenced

MdeModulePkg\Universal\Variable\RuntimeDxe\VariableRuntimeDxe.inf

```
[Pcd]
  gEfiMdeModulePkgTokenSpaceGuid.PcdMaxVariableSize ## CONSUMES
```

Modified

```
[PcdsFixedAtBuild]
gEfiMdeModulePkgTokenSpaceGuid.PcdMaxVariableSize|0x008400
```

Used

MdeModulePkg\Universal\Variable\RuntimeDxe\Variable.c // max NV variable size

```
 mVariableModuleGlobal->MaxVariableSize = PcdGet32 (PcdMaxVariableSize);
```

PCD SOFTWARE

DEC
+
INF
+
DSC

PCD SOFTWARE

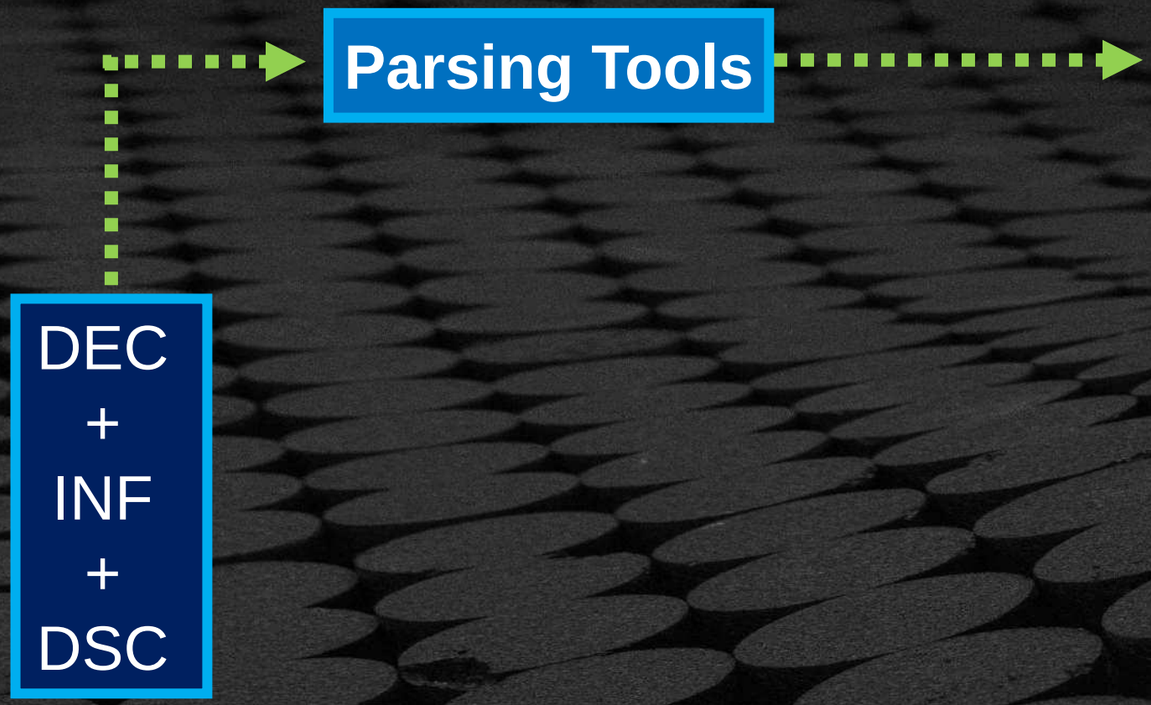

PCD SOFTWARE

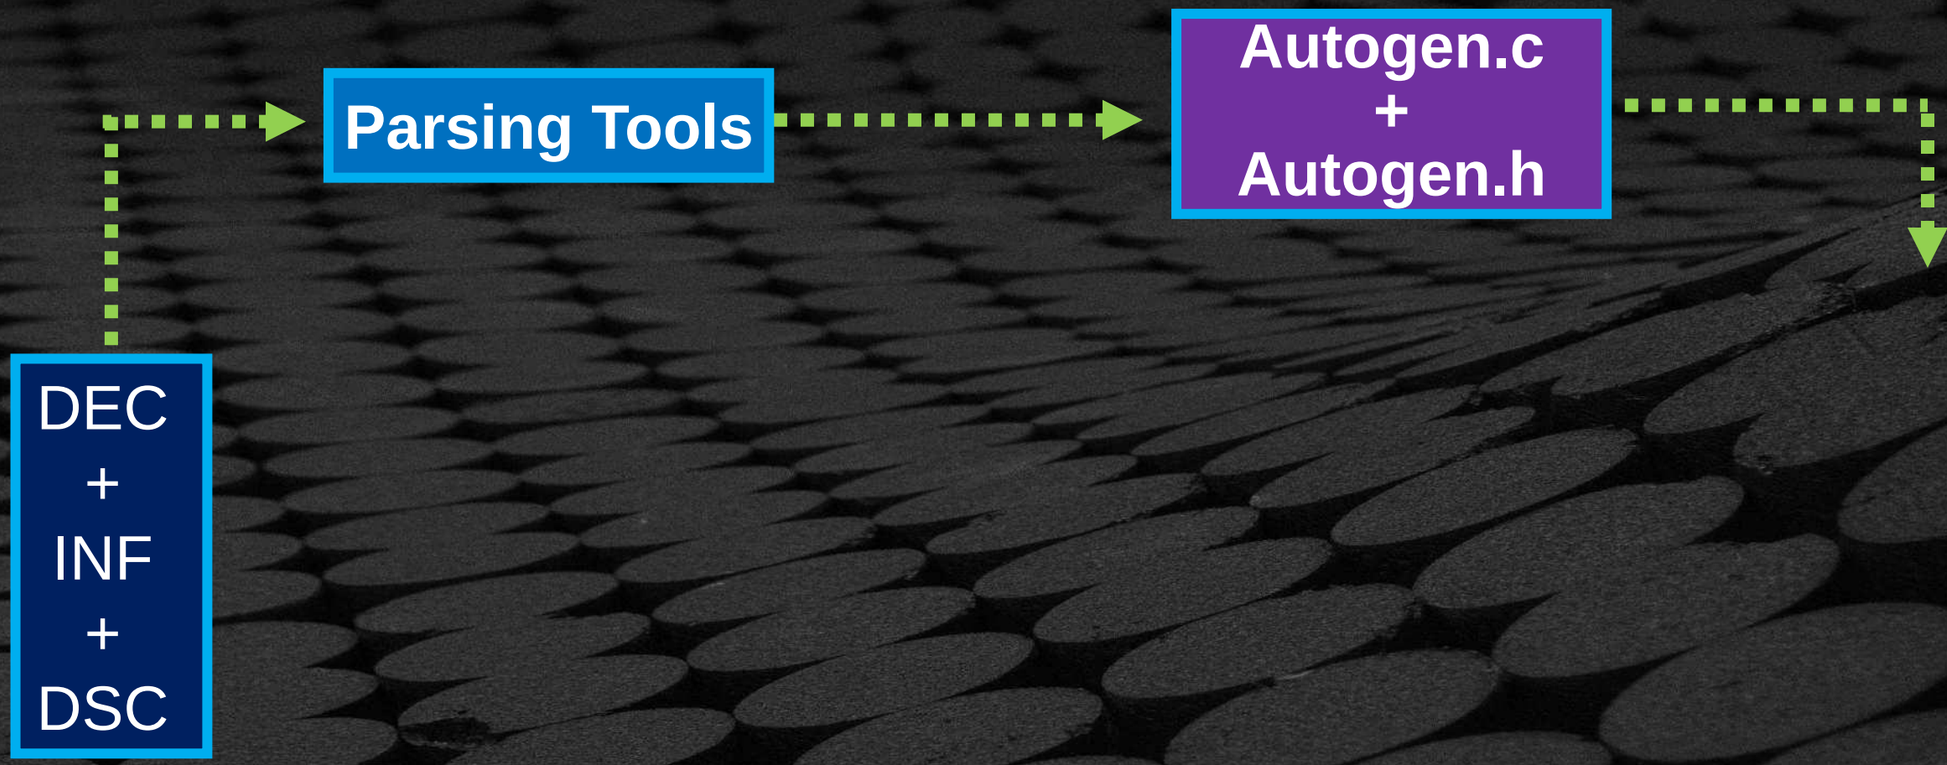

PCD SOFTWARE

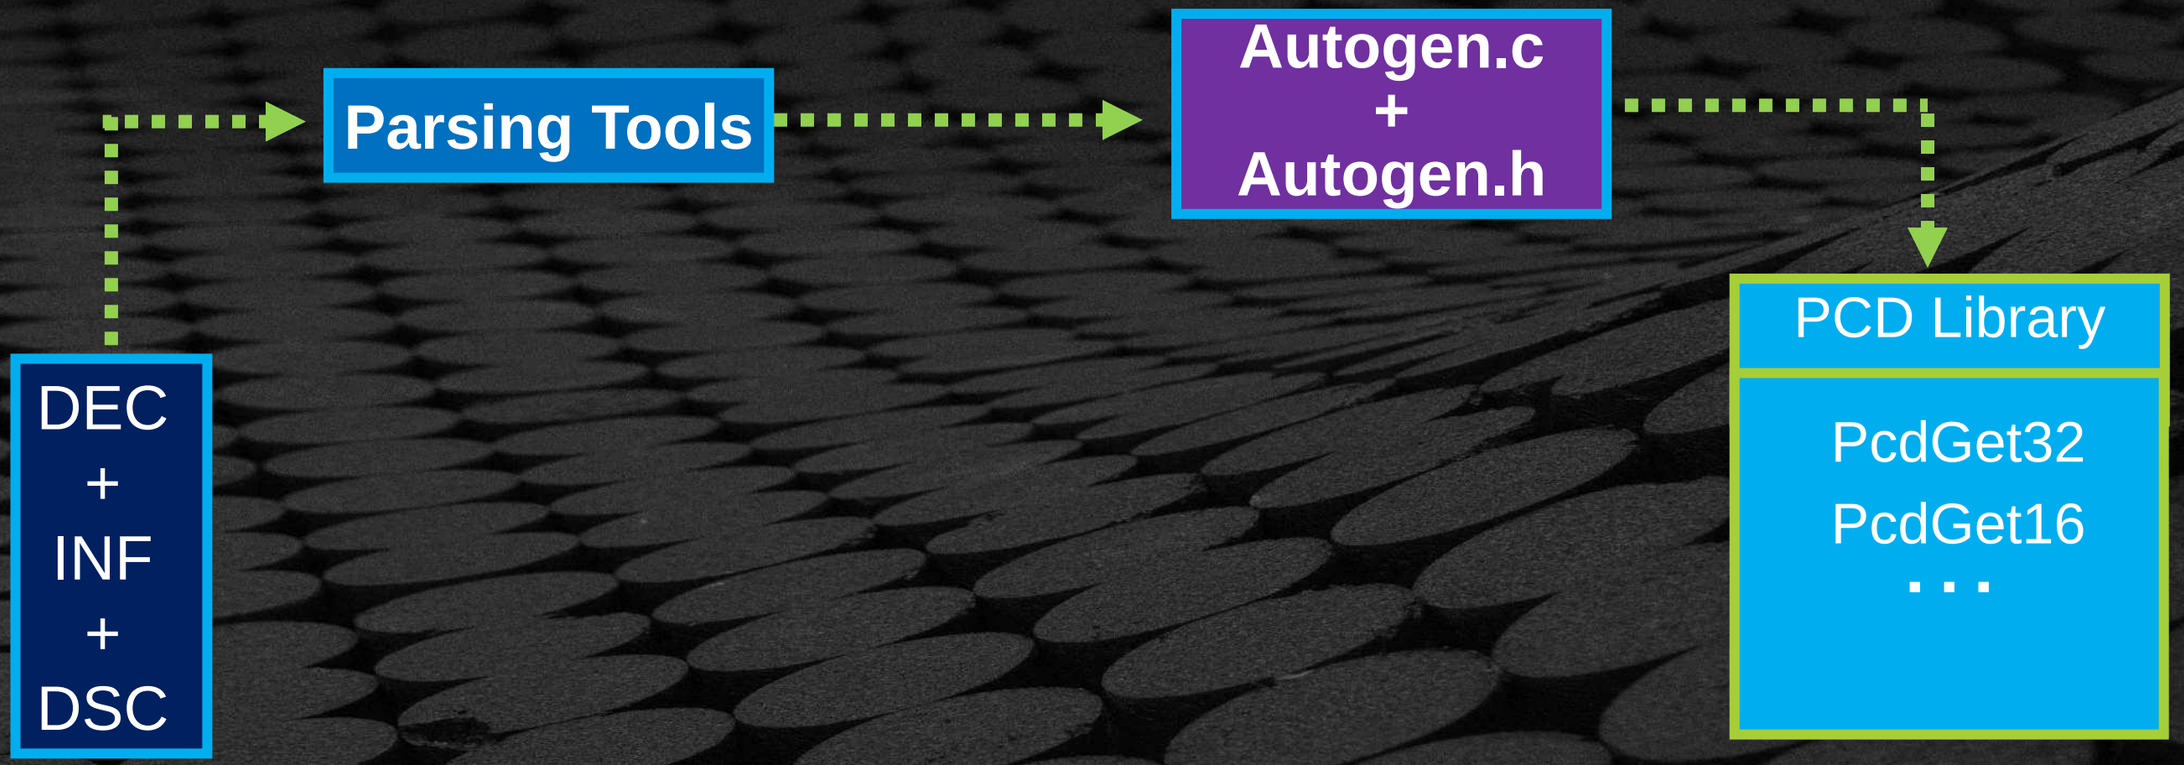

tianocore

PCD SOFTWARE

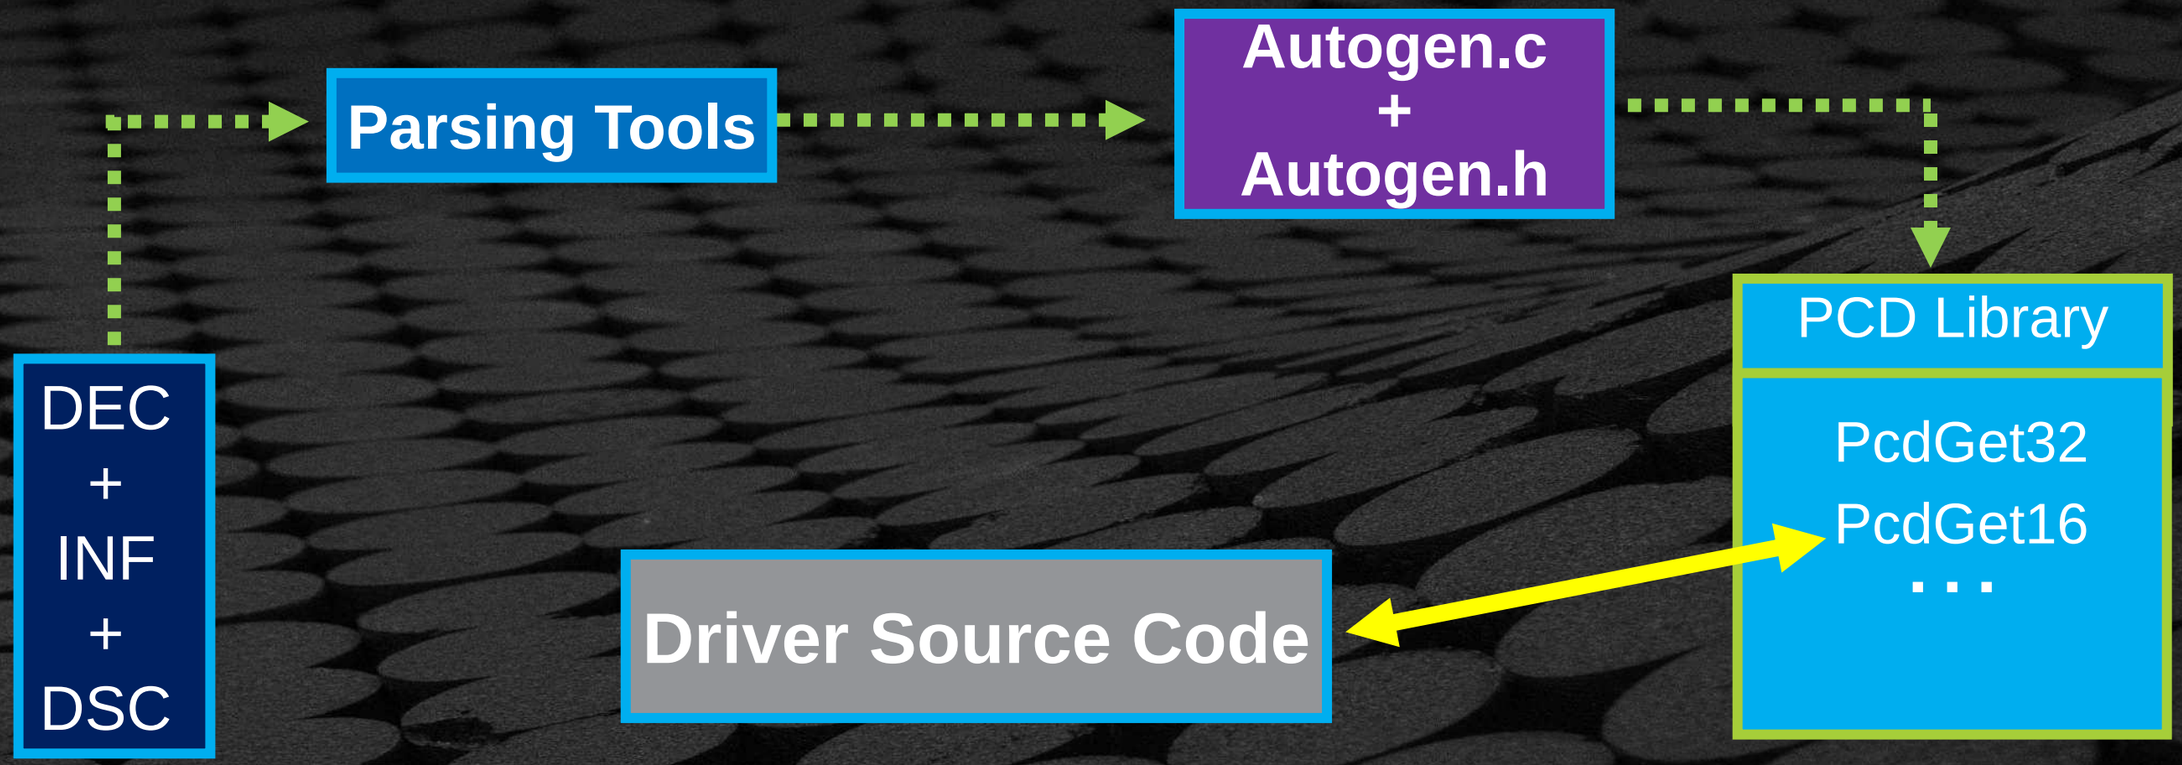

tianocore

PCD DRIVER

DEC
+
INF
+
DSC

PCD DRIVER

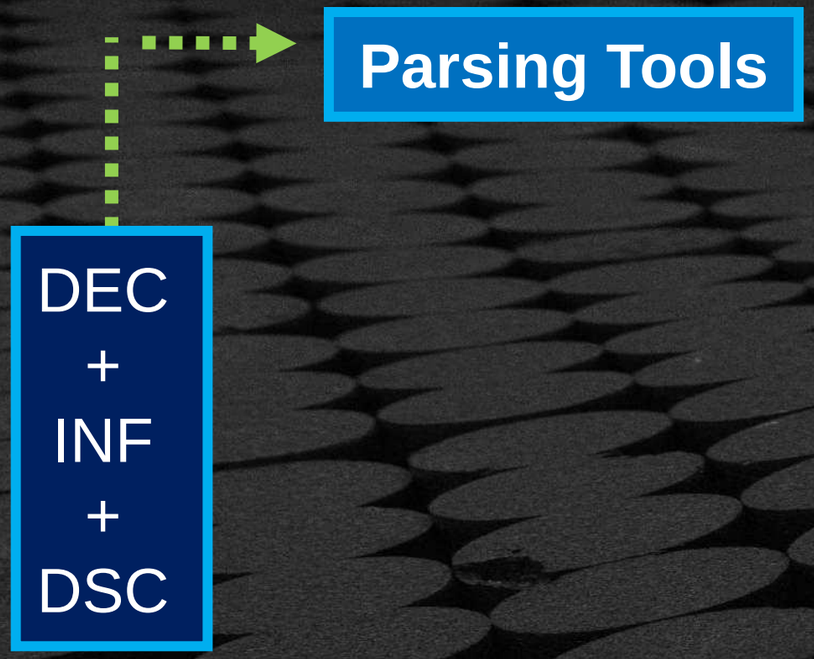

tianocore

PCD DRIVER

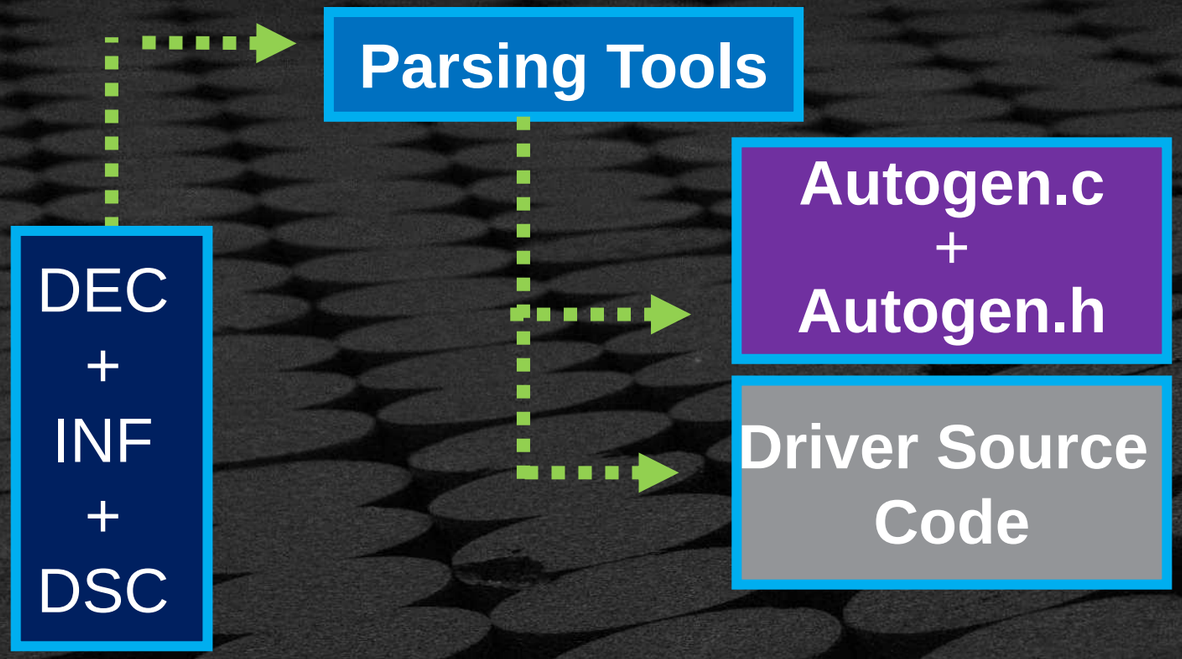

tianocore

PCD DRIVER

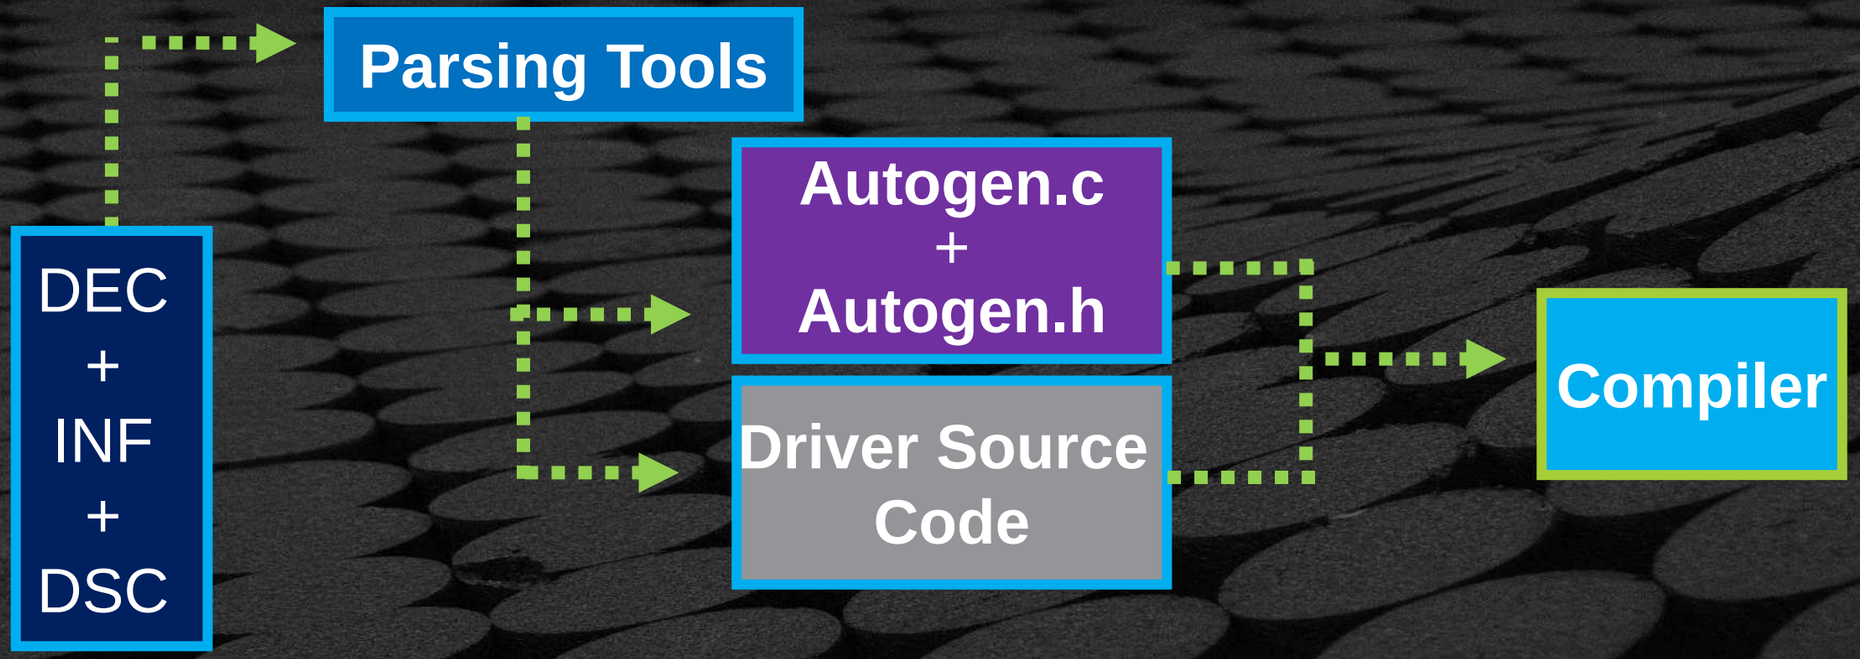

PCD DRIVER

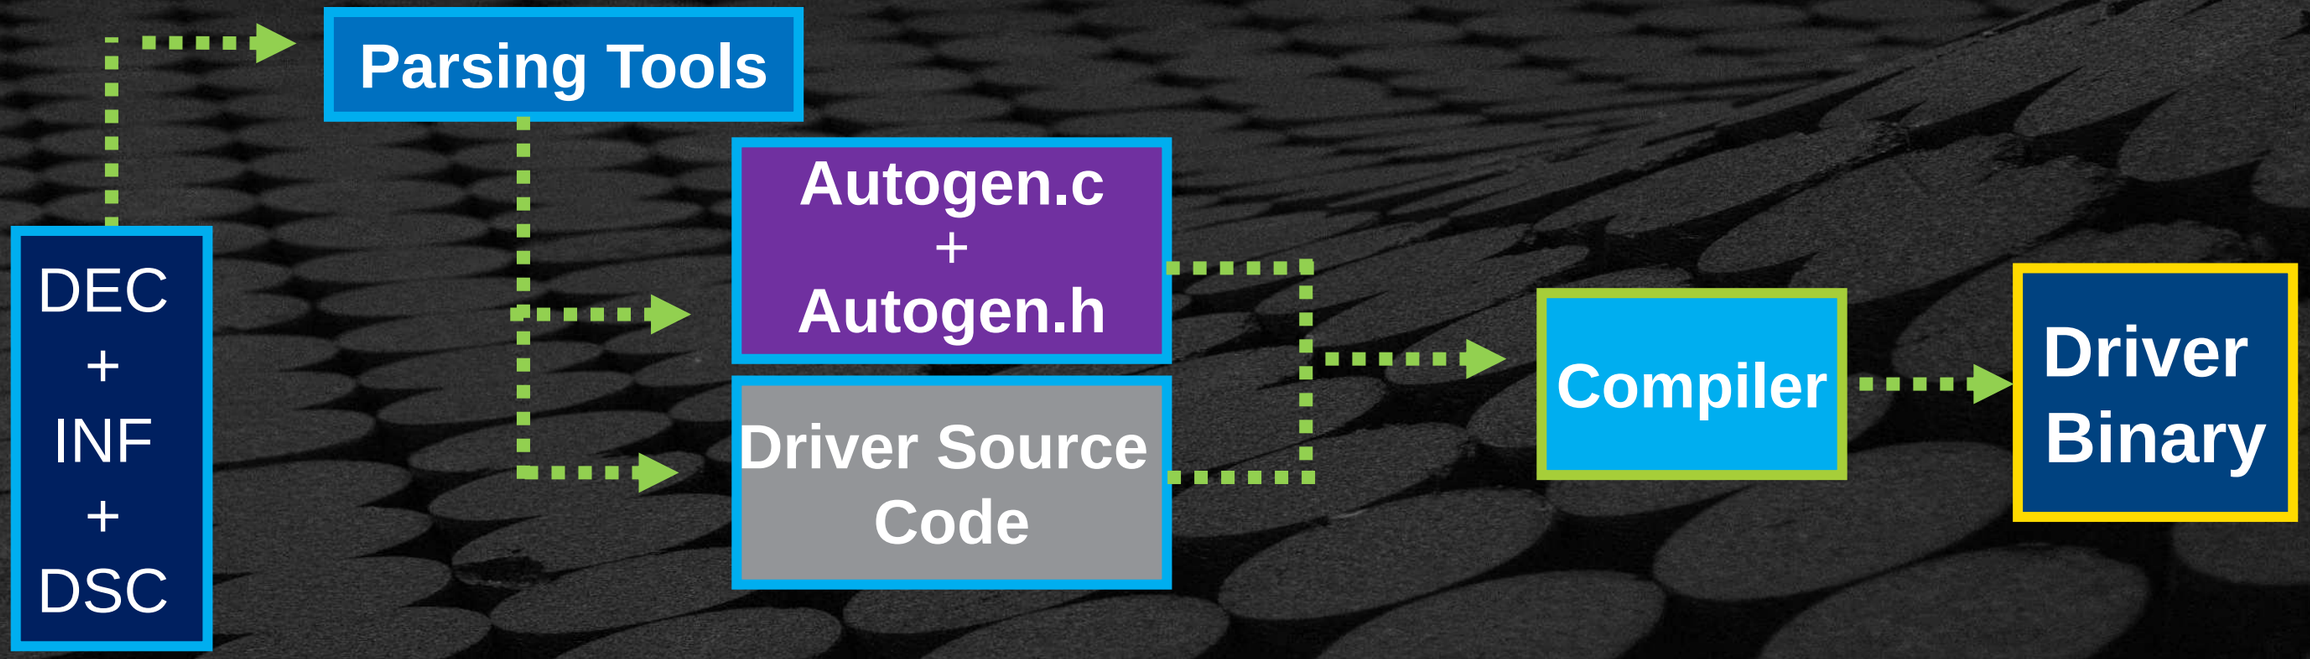
DEC
+
INF
+
DSC
Parsing Tools
Autogen.c
+
Autogen.h
Driver Source
Code
Compiler
Driver
Binary

Fixed PCD AutoGen files

Example : MdeModulePkg\Universal\Variable\RuntimeDxe\VariableRuntimeDxe

Autogen.h

```
#define _PCD_TOKEN_PcdMaxVariableSize  250U
#define _PCD_SIZE_PcdMaxVariableSize 4
#define _PCD_GET_MODE_SIZE_PcdMaxVariableSize  _PCD_SIZE_PcdMaxVariableSize
#define _PCD_VALUE_PcdMaxVariableSize  0x8400U
extern const  UINT32  _gPcd_FixedAtBuild_PcdMaxVariableSize;
#define _PCD_GET_MODE_32_PcdMaxVariableSize  _gPcd_FixedAtBuild_PcdMaxVariableSize
```

Autogen.c

```
// Definition of PCDs used in this module
. . .
GLOBAL_REMOVE_IF_UNREFERENCED const UINT32 _gPcd_FixedAtBuild_PcdMaxVariableSize =
   _PCD_VALUE_PcdMaxVariableSize;
```

tianocore

What about a Dynamic PCDs?

- Only can be Set and changed during Boot time.
- PCD can be set with the library Set: LibPcdSet…
- PCD can be retrieved with the library Get: LibPcdGet…

Example: Use the variable `PcdPlatformBootTimeOut` defined for the platform time in seconds before booting, modified for a value of `03` seconds

tianocore

DYNAMIC PCD

Defined

```
[PcdsDynamic]
gEfiMdePkgTokenSpaceGuid.PcdPlatformBootTimeOut|0xffff|UINT16|0x
```

Modified

```
[PcdsDynamicDefault]
  gEfiMdePkgTokenSpaceGuid.PcdPlatformBootTimeOut|03
```

Setting

OvmfPkg/Library/PlatformBootManagerLib/BdsPlatform.c

```
PcdStatus = PcdSet16S (PcdPlatformBootTimeOut,
                       GetFrontPageTimeoutFromQemu ());
```

Used

OvmfPkg/Library/QemuBootOrderLib/QemuBootOrderLib.c

```
Timeout = PcdGet16 (PcdPlatformBootTimeOut);
```

DYNAMIC PCD AUTOGEN FILES

Example Module: (OvmfPkg\Library\PlatformBootManagerLib)

Autogen.h

```
• • •
#define _PCD_SET_MODE_16_PcdPlatformBootTimeOut(Value) \
 LibPcdSet16(_PCD_TOKEN_PcdPlatformBootTimeOut, ( Value ))
#define _PCD_SET_MODE_16_S_PcdPlatformBootTimeOut(Value) \
 LibPcdSet16S(_PCD_TOKEN_PcdPlatformBootTimeOut, ( Value ))
```

Example Module: (MdeModulePkg/Universal/PCD/Dxe/Pcd)

Autogen.c

```
DXE_PCD_DATABASE_INIT gDXEPcdDbInit = {
• • •
 /* LocalTokenNumberTable */
• • •
 offsetof(DXE_PCD_DATABASE, Init.PcdPlatformBootTimeOut_*1) | PCD_TYPE_DATA | PCD_DATUM_TYPE_UINT16,
• • •
    { 0x3U }          /*  PcdPlatformBootTimeOut_*1 [1] */,
```

*1 GUID of PCD Variable **PcdPlatformBootTimeOut**

tianocore

Special PCDS

Multi-Structure PCD

- C data structure and assign the value to each sub-field directly

Multi-Sku PCD

- Multiple configurations generated at build time & set @ run time, (PI Spec Vol 3 chap. 8)

DefaultStores PCD

- Support the default stores concept in UEFI specification, (UEFI, HII Chap. 32)

Multiple “C” Data Structure as PCDs

Example: edk2-platforms/ Platform/ Intel/ AdvancedFeaturePkg.dec/

SMBIOS type 0 data structure

```
gAdvancedFeaturePkgTokenSpaceGuid.PcdSmbiosType0BiosInformation| \
        {0x0}|SMBIOS_TABLE_TYPE0|0x80010000 {
    <HeaderFiles>
       IndustryStandard/SmBios.h
    <Packages>
       MdePkg/MdePkg.dec
       AdvancedFeaturePkg/AdvancedFeaturePkg.dec
}
gAdvancedFeaturePkgTokenSpaceGuid.PcdSmbiosType0BiosInformation.Vendor|0x1
gAdvancedFeaturePkgTokenSpaceGuid.PcdSmbiosType0BiosInformation.BiosVersion|0x2
gAdvancedFeaturePkgTokenSpaceGuid.PcdSmbiosType0BiosInformation.BiosSegment|0xF000
gAdvancedFeaturePkgTokenSpaceGuid.PcdSmbiosType0BiosInformation.BiosReleaseDate|0x3
gAdvancedFeaturePkgTokenSpaceGuid.PcdSmbiosType0BiosInformation.BiosSize|0xFF
gAdvancedFeaturePkgTokenSpaceGuid.PcdSmbiosType0BiosInformation.BiosCharacteristics.\
     PciIsSupported|1
gAdvancedFeaturePkgTokenSpaceGuid.PcdSmbiosType0BiosInformation.BiosCharacteristics.\
     PlugAndPlayIsSupported|1
```

Multi-SKU PCD

DSC File – SKU Set at BUILD time

```
. . .
SKUID_IDENTIFIER = ?

[SkuIds]
0|DEFAULT
4|BoardX
0x42|BoardY

[PcdsDynamicDefault.common.BoardX]
gBoardModuleTokenSpaceGuid.PcdGpioPin|0x8
gBoardModuleTokenSpaceGuid.PcdGpioInitValue|\
        {0x00, 0x04, 0x02, 0x04, ...}

[PcdsDynamicDefault.common.BoardY]
gBoardModuleTokenSpaceGuid.PcdGpioPin|0x4
gBoardModuleTokenSpaceGuid.PcdGpioInitValue|\
        {0x00, 0x02, 0x01, 0x02, ...}
```

SKU PCD Set Dynamically

```
BoardXBoardDetect( VOID)
{
. . .
  if (LibPcdGetSku () != 0) {
    return EFI_SUCCESS;
  }
  if (IsBoardX ()) {
     LibPcdSetSku (BoardIdIsBoardX);
     ASSERT (LibPcdGetSku() ==
                BoardIdIsBoardX);
  }
  return EFI_SUCCESS;
}
```

Default Stores PCD

DSC File –

```
. . .
VPD_TOOL_GUID  = 8C3D856A-9 . . .

[DefaultStores]
0|STANDARD
1|MANUFACTURING
2|SAFE


[PcdsDynamicExVpd.common.DEFAULT]
  gEfiMdeModulePkgTokenSpaceGuid.PcdNvStoreDefaultValueBuffer|*
[PcdsDynamicEx.common.DEFAULT.STANDARD]
  gOemSkuTokenSpaceGuid.PcdSetupData.CloudProfile|0x0
  gOemSkuTokenSpaceGuid.PcdSetupData.Use1GPageTable|0x1
[PcdsDynamicEx.common.DEFAULT.MANUFACTURING]
  gOemSkuTokenSpaceGuid.PcdSetupData.CloudProfile|0x1
  gOemSkuTokenSpaceGuid.PcdSetupData.Use1GPageTable|0x0
```

- Special PCD to support the default stores concept in UEFI specification
- Can be Dynamically set

tianocore

SUMMARY

- Define Platform Configuration Database (PCD) and explain the syntax
- Differentiate types of PCDs
- Explain how changing a PCD value affects output
- Evaluate the results of a PCD value modification
- Special PCDs


Questions?

Return to Main Training Page

Return to Training Table of contents for next presentation link


tianocore