

GATE 2014

EE25BTECH11060 - Namaswi Vajjala

1) Choose the most appropriate phrase from the options given below to complete the following sentence. The aircraft take off as soon as its flight plan was filed. (GATE ME 2014)

- a) is allowed to c) was allowed to
b) will be allowed to d) has been allowed to

2) Read the statements: All women are entrepreneurs. Some women are doctors. Which of the following conclusions can be logically inferred from the above statements? (GATE ME 2014)

- a) All women are doctors
b) All doctors are entrepreneurs
c) All entrepreneurs are women
d) some entrepreneurs are doctors

3) Choose the most appropriate word from the options given below to complete the following sentence. Many ancient cultures attributed disease to supernatural causes. However, modern science has largely helped _____ (GATE ME 2014)

- a) impel b) dispel c) propel d) repel

4) The statistics of runs scored in a series by four batsmen are provided in the following table. Who is the most consistent batsman of these four? (GATE ME 2014)

Batsman	Average	Standard deviation
K	31.2	5.21
L	46.0	6.35
M	54.4	6.22
N	17.9	5.90

- a) K b) L c) M d) N

5) what is the next number of series 12 35 81 173 357
6) Find the odd one from the following group: W,E,K,O I,Q,W,A F,N,T,X
N,V,B,D

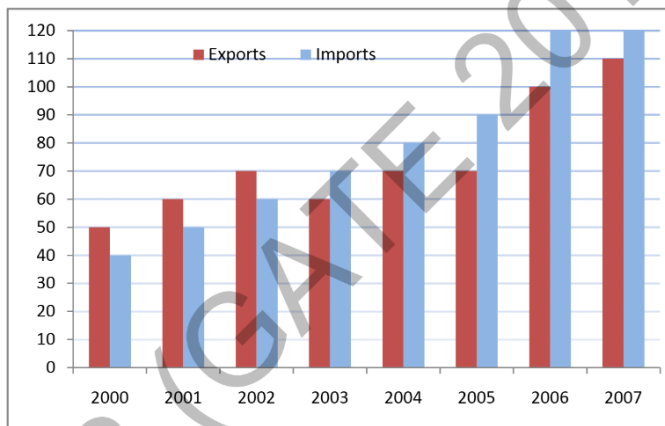


Fig. 9.1: Caption

- a) W,E,K,O b) I,Q,W,A c) F,N,T,X d) N,V,B,D

7) For submitting tax returns, all resident males with annual income below Rs 10 lakh should fill up Form P and all resident females with income below Rs 8 lakh should fill up Form Q. All people with incomes above Rs 10 lakh should fill up Form R, except non residents with income above Rs 15 lakhs, who should fill up Form S. All others should fill Form T. An example of a person who should fill Form T is (GATE ME 2014)

- a) a resident male with annual income Rs 9 lakh
 b) a resident female with annual income Rs 9 lakh
 c) a non-resident male with annual income Rs 16 lakh
 d) a non-resident female with annual income Rs 16 lakh

8) A train that is 280 metres long, travelling at a uniform speed, crosses a platform in 60 seconds and passes a man standing on the platform in 20 seconds. What is the length of the platform in metres?
 (GATE ME 2014)

9) The exports and imports (in crores of Rs.) of a country from 2000 to 2007 are given in the following bar chart. If the trade deficit is defined as excess of imports over exports, in which year is the trade deficit $\frac{1}{5}$ th of the exports? (GATE ME 2014)

- a) 2005 b) 2004 c) 2007 d) 2006

10) You are given three coins: one has heads on both faces, the second has tails on both faces, and the third has a head on one face and a tail on the other. You choose a coin at random and toss it, and it comes up heads. The probability that the other face is tails is
 (GATE ME 2014)

a) $\frac{1}{4}$

b) $\frac{1}{3}$

c) $\frac{1}{2}$

d) $\frac{2}{3}$

Q.1-Q.25 carry one mark each

- 1) Given that the determinant of matrix $A = \begin{bmatrix} 1 & 3 & 0 \\ 2 & 6 & 4 \\ -1 & 0 & 2 \end{bmatrix}$ is -12, the determinant of the

matrix $A = \begin{bmatrix} 2 & 6 & 0 \\ 4 & 12 & 8 \\ -2 & 0 & 4 \end{bmatrix}$ is (GATE ME 2014)

- a) -96 b) -24 c) 24 d) 96

- 2) $\lim_{x \rightarrow 0} \frac{x - \sin x}{1 - \cos x}$ is (GATE ME 2014)

- a) 0 b) 1 c) 3 d) not defined

- 3) The argument of complex numbers $\frac{1+i}{1-i}$, where i is $\sqrt{-1}$, is (GATE ME 2014)

- a) $-\pi$ b) $-\pi/2$ c) $\pi/2$ d) π

- 4) The matrix form of linear system $\frac{dy}{dx} = 3x - 5y$ and $\frac{dy}{dt} = 4x + 8y$ is (GATE ME 2014)

- a) b) c) d)

$$\frac{d}{dt} \begin{Bmatrix} x \\ y \end{Bmatrix} = \begin{bmatrix} 3 & -5 \\ 4 & 8 \end{bmatrix} \begin{Bmatrix} x \\ y \end{Bmatrix} \frac{d}{dt} \begin{Bmatrix} x \\ y \end{Bmatrix} = \begin{bmatrix} 3 & 8 \\ 4 & -5 \end{bmatrix} \begin{Bmatrix} x \\ y \end{Bmatrix} \frac{d}{dt} \begin{Bmatrix} x \\ y \end{Bmatrix} = \begin{bmatrix} 4 & -5 \\ 3 & 8 \end{bmatrix} \begin{Bmatrix} x \\ y \end{Bmatrix} \frac{d}{dt} \begin{Bmatrix} x \\ y \end{Bmatrix} = \begin{bmatrix} 4 & 8 \\ 3 & -5 \end{bmatrix} \begin{Bmatrix} x \\ y \end{Bmatrix}$$

- 5) Which one of the following describes the relationship among the three vectors,

$$\hat{i} + \hat{j} + \hat{k}, \quad \mathbf{v}_1 = 2\hat{i} + 3\hat{j} + \hat{k}, \\ \mathbf{v}_2 = 5\hat{i} + 6\hat{j} + 4\hat{k}$$

(GATE ME 2014)

- a) The vectors are mutually perpendicular
b) The vectors are linearly dependent
c) The vectors are linearly independent
d) The vectors are unit vectors

- 6) A circular rod of length 'L' and area of cross-section 'A' has a modulus of elasticity 'E' and coefficient of thermal expansion 'α'. One end of the rod is fixed and other end is free. If the temperature of the rod is increased by ΔT, then

(GATE ME 2014)

- a) stress developed in the rod is E α ΔT and strain developed in the rod is α ΔT
b) both stress and strain developed in the rod are zero
c) stress developed in the rod is zero and strain developed in the rod is α ΔT
d) stress developed in the rod is E α ΔT and strain developed in the rod is zero

- 7) A metallic rod of 500 mm length and 50 mm diameter, when subjected to a tensile force of 100 kN at the ends, experiences an increase in its length by 0.5 mm and a reduction in its diameter by 0.015 mm. The Poisson's ratio of the rod material is

(GATE ME 2014)

8) Critical damping is the

(GATE ME 2014)

- a) largest amount of damping for which no oscillation occurs in free vibration
- b) largest amount of damping for which the motion is simple harmonic in free vibration
- c) smallest amount of damping for which the motion is simple harmonic in free vibration
- d) smallest amount of damping for which the motion is simple harmonic for free vibration

9) A circular object of radius r rolls without slipping on a horizontal level floor with the center having velocity V . The velocity at the point of contact between the object and the floor is

(GATE ME 2014)


- a) zero
- b) V in the direction of motion
- c) V opposite to the direction of motion
- d) V vertically upward from the floor

10) For the given statements: I. Mating spur gear teeth is an example of higher pair II. A revolute joint is an example of lower pair Indicate the correct answer.

(GATE ME 2014)

- a) Both I and II are false
- b) I is true and II is false
- c) I is false and II is true
- d) Both I and II are true

11) A rigid link PQ is 2 m long and oriented at 20° to the horizontal as shown in the figure. The magnitude and direction of velocity V_Q , and the direction of velocity V_P are given. The magnitude of V_P (in m/s) at this instant is

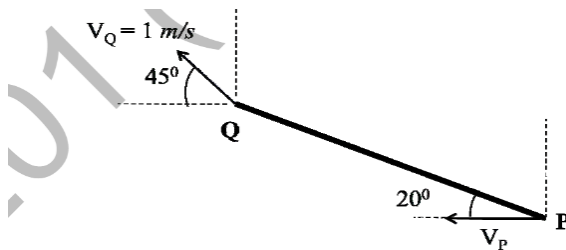

(GATE ME 2014)

- a) 2.14 b) 1.89 c) 1.21 d) 0.96

12) Biot number signifies the ratio of

(GATE ME 2014)


- a) convective resistance in the fluid to conductive resistance in the solid
 b) conductive resistance in the solid to convective resistance in the fluid
 c) inertia force to viscous force in the fluid
 d) buoyancy force to viscous force in the fluid

13) The maximum theoretical work obtainable, when a system interacts to equilibrium with a reference environment, is called

(GATE ME 2014)

- a) entropy b) enthalpy c) energy d) rothalpy

14) Consider a two-dimensional laminar flow over a long cylinder as shown in the figure below.

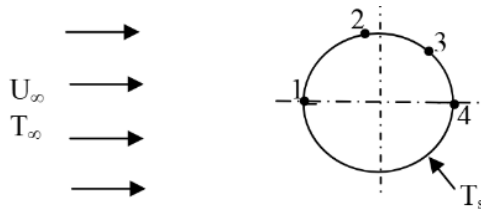

The free stream velocity is U_∞ , and the free stream temperature T_∞ is lower than the cylinder surface temperature T_s . The local heat transfer coefficient is minimum at point

(GATE ME 2014)

- a) 1 b) 2 c) 3 d) 4

15) For a completely submerged body with centre of gravity 'G' and centre of buoyancy 'B', the condition of stability will be

(GATE ME 2014)

- a) G is located below B
 b) G is located above B
 c) G and B are coincident
 d) independent of locations of G and B

16) In a power plant, water ($\text{density} = 1000 \text{ kg/m}^3$) is pumped from 80 kPa to 3 MPa. The pump has an isentropic efficiency of 0.85. Assuming that the temperature of the water remains the same, the specific work (in kJ) supplied to the pump is

(GATE ME 2014)

- a) 0.34
- b) 2.48
- c) 2.92
- d) 3.43

17) Which one of the following is CFG refrigerant

(GATE ME 2014)

- a) R744
- b) R290
- c) R502
- d) R718

18) The jobs arrive at a facility, for service, in a random manner. The probability distribution of number of arrivals of job of fixed time interval is (GATE ME 2014)

- a) Normal
- b) poisson
- c) erlang
- d) beta

19) In exponential smoothening method, which one of the following is true?

(GATE ME 2014)

- a) $0 < a \leq 1$ and high value of a is used for stable demand
- b) $0 \leq a \leq 1$ and high value of a is used for unstable demand
- c) $a \geq 1$ and high value of a is used for stable demand
- d) $a \leq 0$ and high value of a is used for unstable demand

20) For machining a rectangular island represented by coordinates P (0,0) Q (100,0), R (100,50) and S (0,50) on a casting using CNC milling machine, an end mill with a diameter of 16 mm is used. The trajectory of the cutter centre to machine the island PQRS is

(GATE ME 2014)

- a) $(-8, -8), (108, -8), (108, 58), (-8, 58), (-8, -8)$
- b) $(8, 8), (94, 8), (94, 44), (8, 44), (8, 8)$
- c) $(-8, 8), (94, 0), (94, 44), (8, 44), (-8, 8)$
- d) $(0, 0), (100, 0), (100, 50), (50, 0), (0, 0)$

21) Which one of the following instruments is widely used to check and calibrate geometric features of machine tools during their assembly?

(GATE ME 2014)

- a) Ultrasonic probe
- b) Coordinate machine learning
- c) Laser interferometer
- d) Vernier callipers

22) The major difficulty during welding of aluminium is due to its

(GATE ME 2014)

- a) high tendency of oxidation
- b) higher thermal conductivity
- c) low melting point
- d) lower density

- 23) The main cutting force acting on a tool during the turning (orthogonal cutting) operation of a metal is 400 N. The turning was performed using 2 mm depth of cut and 0.1 mm/rev feed rate. The specific cutting pressure (in N/mm^2) is
(GATE ME 2014)

a) 1000 b) 2000 c) 3000 d) 4000

- 24) The process of reheating the martensitic steel to reduce its brittleness without any significant loss in its hardness is
(GATE ME 2014)

a) normalising b) annealing c) quenching d) tempering

- 25) In solid-state welding, the contamination layers between the surfaces to be welded are removed by
(GATE ME 2014)

a) alcohol tion d) sand blasting
b) plastic deforma- c) water jet

Q.26-Q.55 carry two marks each

- 26) The integral

$$\oint_C (y dx - x dy)$$

is evaluated along the circle

$$x^2 + y^2 = \frac{1}{4}$$

traversed in counter-clockwise direction. The integral is equal to:

(GATE ME 2014)

a) 0 c) $-\frac{\pi}{2}$
b) $-\frac{\pi}{4}$ d) $\frac{\pi}{4}$

- 27) If $y = f(x)$ is the solution of

$$\frac{d^2y}{dx^2} = 0$$

with the boundary conditions

$$y = 5 \text{ at } x = 0, \quad \text{and} \quad \frac{dy}{dx} = 2 \text{ at } x = 10,$$

then

$$f(15) = \underline{\hspace{2cm}}$$

- 28) In the following table, x is a discrete random variable and $p(x)$ is the probability density. The standard deviation of x is:

x	1	2	3
$p(x)$	0.3	0.6	0.1

(GATE ME 2014)

- a) 0.18
b) 0.36
- c) 0.54
d) 0.6

29) Using the trapezoidal rule, and dividing the interval of integration into three equal subintervals, the definite integral

$$\int_{-1}^1 |x| dx = \underline{\hspace{2cm}}$$

(GATE ME 2014)

30)

The state of stress at a point is given by:

$$\sigma_x = -6 \text{ MPa},$$


$$\sigma_y = 4 \text{ MPa},$$

$$\tau_{xy} = -8 \text{ MPa}.$$

The tensile stress (in MPa) at the point is:

(GATE ME 2014)


31) A block R of mass 100 kg is placed on a block S of mass 150 kg as shown in the figure. Block R is tied to the wall by a massless and inextensible string PQ. If the coefficient of static friction for all surfaces is 0.4, the minimum force F (in kN) needed to move the block S is

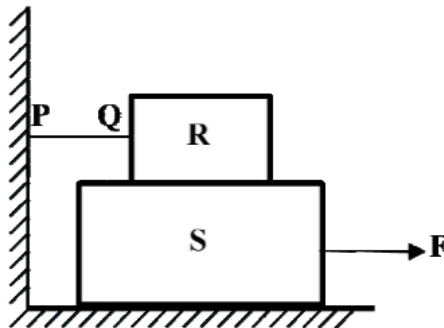


(GATE ME 2014)

- a) 0.69 b) 0.88 c) 0.98 d) 1.37

- 32) A pair of spur gears with module 5 mm and a center distance of 450 mm is used for a speed reduction of 5:1. The number of teeth on pinion is
(GATE ME 2014)
- 33) Consider a cantilever beam, having negligible mass and uniform flexural rigidity, with length 0.01 m. The frequency of vibration of the beam, with a 0.5 kg mass attached at the free tip, is 100 Hz. The flexural rigidity (Nm^2) of the beam is
(GATE ME 2014)
- 34) An ideal water jet with volume flow rate of 0.05 m³/s strikes a flat plate placed normal to its path and exerts a force of 1000 N. Considering the density of water as 1000 kg/m³, the diameter (in mm) of the water jet is
(GATE ME 2014)
- 35) A block weighing 200 N is in contact with a level plane whose coefficients of static and kinetic friction are 0.4 and 0.2, respectively. The block is acted upon by a horizontal force (in newton) $P=10t$, where t denotes the time in seconds. The velocity (in m/s) of the block attained after 10 seconds is
(GATE ME 2014)
- 36) A slider crank mechanism has slider mass of 10 kg, stroke of 0.2 m and rotates with a uniform angular velocity of 10 rad/s. The primary inertia forces of the slider are partially balanced by a revolving mass of 6 kg at the crank, placed at a distance equal to crank radius. Neglect the mass of connecting rod and crank. When the crank angle (with respect to slider axis) is 30° , the unbalanced force (in newton) normal to the slider axis is
(GATE ME 2014)
- 37) An offset slider-crank mechanism is shown in the figure at an instant. Conventionally, the Quick Return Ratio (QRR) is considered to be greater than one. The value of QRR is
(GATE ME 2014)

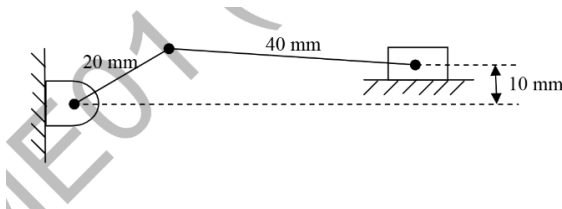

- 38) A rigid uniform rod AB of length L and mass m is hinged at C such that $AC = L/3$, $CB = 2L/3$. Ends A and B are supported by springs of spring constant k. The natural frequency of the system is given by
(GATE ME 2014)

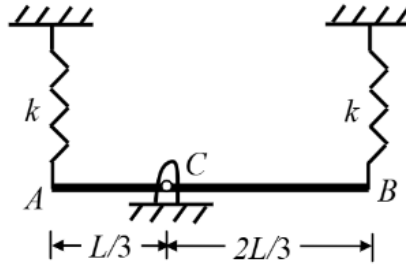

- a) $\sqrt{k/2m}$ b) $\sqrt{k/m}$ c) $\sqrt{2k/m}$ d) $\sqrt{5k/m}$

39) A hydrodynamic journal bearing is subject to 2000 N load at a rotational speed of 2000 rpm. Both bearing bore diameter and length are 40 mm. If radial clearance is 20 μm and bearing is lubricated with an oil having viscosity 0.03 Pa.s, the Sommerfeld number of the bearing is

(GATE ME 2014)

40) A 200 mm long, stress free rod at room temperature is held between two immovable rigid walls. The temperature of the rod is uniformly raised by 250°C. If the Young's modulus and coefficient of thermal expansion are 200 GPa and $1 \times 10^{-5} \text{ } ^\circ\text{C}^{-1}$, respectively, the magnitude of the longitudinal stress (MPa) developed in the rod is

(GATE ME 2014)

41) 1.5 kg of water is in saturated liquid state at 2 bar ($v_f = 0.001061 \text{ m}^3/\text{kg}$, $u_f = 504.0 \text{ kJ/kg}$, $h_f = 505 \text{ kJ/kg}$). Heat is added in a constant pressure process till the temperature of water reaches 400°C. ($v = 1.5493 \text{ m}^3/\text{kg}$, $u = 2967.0 \text{ kJ/kg}$, $h = 3277.0 \text{ kJ/kg}$) The heat added (in kJ) in the process is

(GATE ME 2014)

42) Consider one dimensional steady state heat conduction across a wall (as shown in figure below) of thickness 30 mm and thermal conductivity 15 W/m.K. At $x = 0$, a constant heat flux, $q'' = 1 \times 10^5 \text{ W/m}^2$ is applied. On the other side of the wall, heat is removed from the wall by convection with a fluid at an 25°C and heat transfer coefficient of 250 W/m².K. The temperature (in°C), at $x = 0$ is

(GATE ME 2014)

43) Water flows through a pipe having an inner radius of 10 mm at the rate of 36 kg/hr at 25°C. The viscosity of water at 25°C is 0.001 kg/m.s. The Reynolds number of the flow is

(GATE ME 2014)

44) For a fully developed flow of water in a pipe having diameter 10 cm, velocity 0.1 m/s and kinematic viscosity the value of Darcy friction factor is

(GATE ME 2014)

- 45) In a simple concentric shaft-bearing arrangement, the lubricant flows in the 2 mm gap between the shaft and the bearing. The flow may be assumed to be a plane Couette flow with zero pressure gradient. The diameter of the shaft is 100 mm and its tangential speed is 10 m/s. The dynamic viscosity of the lubricant is 0.1 kg/m.s. The frictional resisting force (*newton*) per 100 mm length of the bearing is (GATE ME 2014)
- 46) The non-dimensional fluid temperature profile near the surface of a convectively cooled flat plate is given by

$$\frac{T_w - T}{T_w - T_\infty} = a + b\frac{y}{L} + c\left(\frac{y}{L}\right)^2 \quad (46.1)$$

where y is measured perpendicular to the plate, L is the plate length, and a , b and c are arbitrary constants. T_w and T_∞ are wall and ambient temperatures, respectively. If the thermal conductivity of the fluid is k and the wall heat flux is q'' , the Nusselt number $Nu =$

$$\frac{q''}{T_w - T_\infty} \cdot \frac{L}{k} \quad (46.2)$$

is equal to

(GATE ME 2014)

- a) a b) b c) $2c$ d) $b + 2c$

- 47) In an air-standard Otto cycle, air is supplied at 0.1 MPa and 308 K. The ratio of the specific heats (γ) and the specific gas constant (R) of air are 1.4 and 288.8 J/kg.K, respectively. If the compression ratio is 8 and the maximum temperature in the cycle is 2660 K, the heat (*in KJ/kg*) supplied to the engine is

(GATE ME 2014)

- 48) A reversible heat engine receives 2 kJ of heat from a reservoir at 1000 K and a certain amount of heat from a reservoir at 800 K. It rejects 1 kJ of heat to a reservoir at 400 K. The net work output (*KJ*) of the cycle is

(GATE ME 2014)

- 49) An ideal reheat Rankine cycle operates between the pressure limits of 10 kPa and 8 MPa, with reheat being done at 4 MPa. The temperature of steam at the inlets of both turbines is 500°C and the enthalpy of steam is 3185 kJ/kg at the exit of the high pressure turbine and 2247 kJ/kg at the exit of low pressure turbine. The enthalpy of water at the exit from the pump is 191 kJ/kg. Use the following table for relevant data. disregarding the pump the current efficiency is

(GATE ME 2014)

Superheated steam temperature (°C)	Pressure (MPa)	v (m ³ /kg)	h (kJ/kg)	s (kJ/kg·K)
500	4	0.08644	3446	7.0922
500	8	0.04177	3399	6.7266

TABLE 49: Properties of superheated steam at 500°C for different pressures.

- 50) Jobs arrive at a facility at an average rate of 5 in an 8 hour shift. The arrival of the jobs follows Poisson distribution. The average service time of a job on the facility is 40 minutes. The service time follows exponential distribution. Idle time (in hours) at the facility per shift will be (GATE ME 2014)
- a) $\frac{5}{7}$ b) $\frac{14}{3}$ c) $\frac{7}{5}$ d) $\frac{10}{3}$
- 51) A metal rod of initial length L_0 is subjected to a drawing process. The length of the rod at any instant is given by the expression, $L(t) = L(1 + t^2)$, where t is the time in minutes. The true strain rate (in min^{-1}) at the end of one minute is (GATE ME 2014)
- 52) During pure orthogonal turning operation of a hollow cylindrical pipe, it is found that the thickness of the chip produced is 0.5 mm. The feed given to the zero degree rake angle tool is 0.2 mm/rev. The shear strain produced during the operation is (GATE ME 2014)
- 53) For the given assembly: 25 H7/g8, match Group A with Group B (GATE ME 2014)
- a) P-I, Q-III, R-IV, S-II
 b) P-I, Q-IV, R-III, S-II
 c) P-II, Q-III, R-IV, S-I
 d) P-II, Q-IV, R-III, S-I
- 54) If the Taylor's tool life exponent n is 0.2, and the tool changing time is 1.5 min, then the tool life (in min) for maximum production rate is (GATE ME 2014)
- 55) An aluminium alloy ($\text{density } 2600 \text{ kg/m}^3$) casting is to be produced. A cylindrical hole of 100 mm diameter and 100 mm length is made in the casting using sand core ($\text{density } 2600 \text{ kg/m}^3$). The net buoyancy force (in newton) acting on the core is (GATE ME 2014)