中熔电气
SINOFUSE

RE2B 250V Series Electronic Fuses

Specification

ZR/YC-0275 A4

Add: 97 Jinye 2nd Road, Xi'an, Shaanxi 710077 China
P.C.: 710077
Tel: +86 29 68590655 68590656
029—68590678 (Sales)
Fax: +86 29 68590676
Email: zrchina@sinofuse.com
http: //www.sinofuse.com

AC250V 1A-16A

RoHS COMPLIANT

Content

Basics.....1
Dimensions.....1
Electrical Characteristics.....2
Fuse base basics.....3

AC250V 1A-16A

RoHS COMPLIANT

Basics

- Conform to UL248-14
- Rated Voltage: AC250V
- Rated Current: 1A～16A
- Breaking Capacity: AC250V@1.5kA; Power factor: 0.7~0.8
- RE2BC/MF-XXAH250V series acquired UL certification,RoHS compliant


RE2BC/MF-XXAH250V Featuring in Compact, HRC, Low loss. The cylindrical cap type can be matched to the clip. Axial leaded structure, pin structure and various leaded forming structures can be used for PCB soldering; Used as short-circuit, overload and backup protection for circuits and electronic components in electronic equipment or electrical equipment.

No.	Part Number		Size	Current A	I² (A²s)	1.5In Loss W	Weight (g)	Remark
	Cylindrical cap type	Axial leaded type			Prearc			
1	RE2BCF-1AH250V	RE2BMF-1AH250V	2B	1	0.13	2.5	RE2BCF series 1.18±0.05 RE2BMF series 1.74±0.08	
2	RE2BCF-1.25AH250V	RE2BMF-1.25AH250V		1.25	0.3	4		
3	RE2BCF-1.6AH250V	RE2BMF-1.6AH250V		1.6	0.5	4		
4	RE2BCF-2AH250V	RE2BMF-2AH250V		2	1.2	4		
5	RE2BCF-2.5AH250V	RE2BMF-2.5AH250V		2.5	2	4		
6	RE2BCF-3.15AH250V	RE2BMF-3.15AH250V		3.15	5	4		
7	RE2BCF-4AH250V	RE2BMF-4AH250V		4	11	4		
8	RE2BCF-5AH250V	RE2BMF-5AH250V		5	20	4		
9	RE2BCF-6.3AH250V	RE2BMF-6.3AH250V		6.3	36	4		
10	RE2BCF-8AH250V	RE2BMF-8AH250VA		8	45	4		
11	RE2BCF-10AH250V	RE2BMF-10AH250V		10	110	4		
12	RE2BCF-12.5AH250V	RE2BMF-12.5AH250V		12.5	234	4		
13	RE2BCF-16AH250V	RE2BMF-16AH250V		16	400	4		

Note: The above is the typical data under condidtions of AC250V, and power factor of 0.7~0.8;

Dimensions(mm)


RE2BCFXXAH250V Cylindrical cap type

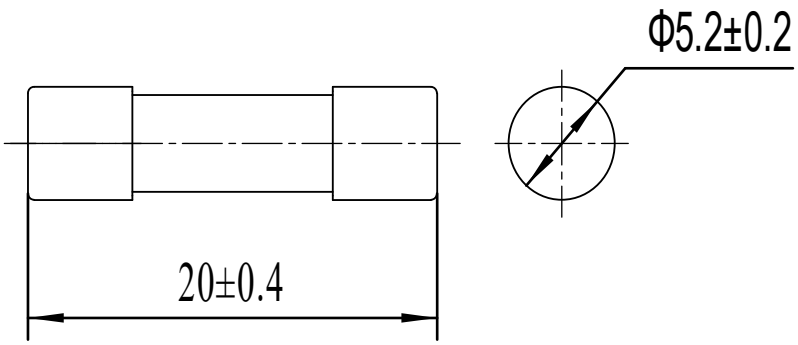

AC250V 1A-16A


RoHS COMPLIANT

RE2BMFXXAH250V（Axial leaded type-φ0.8）

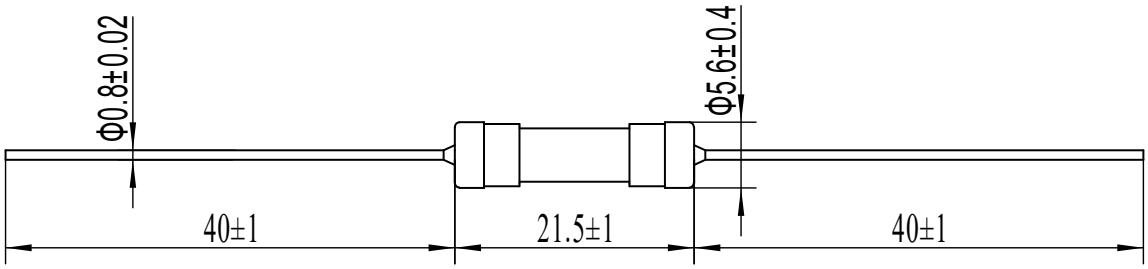

Electrical Characteristics

RE2B*FXXAH250V Time-Current Curve

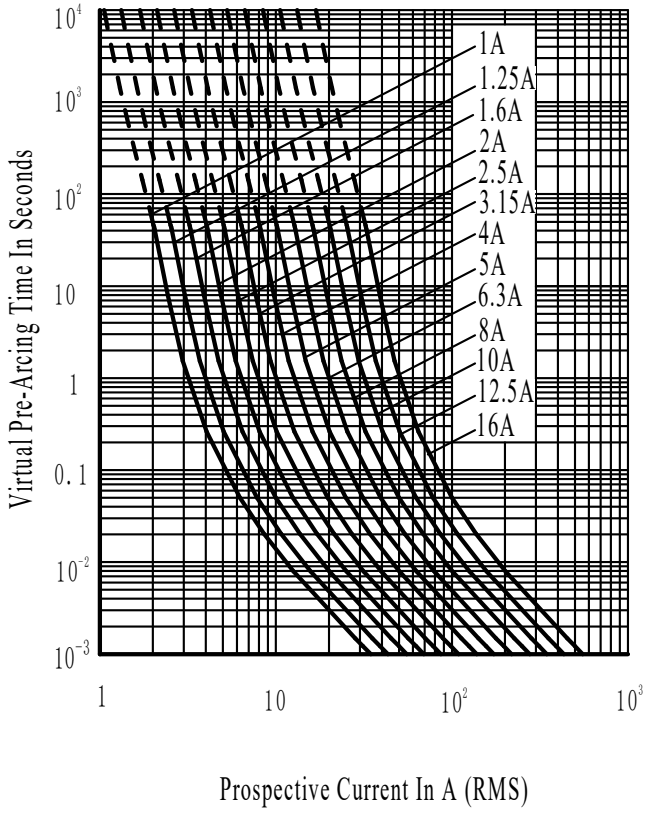

Note 1: The minimum protection multiplier: 2.1In；

2: Curves: current tolerance ±15%；

AC250V 1A-16A

RoHS COMPLIANT

Packaging Quantity

Part Number	Min Package (pcs)	Max Package (pcs)
RE2BCF-XXAH250V	300	4800
RE2BMF-XXAH250V	100	1600


Fuse base basics

SJ5220 base (with φ5.2*20 cylinder cap fuse series)

Fuse base basics

- Rated Voltage: AC/DC250V
- Maximum application current:20A
- RoHS compliant

Dimensions

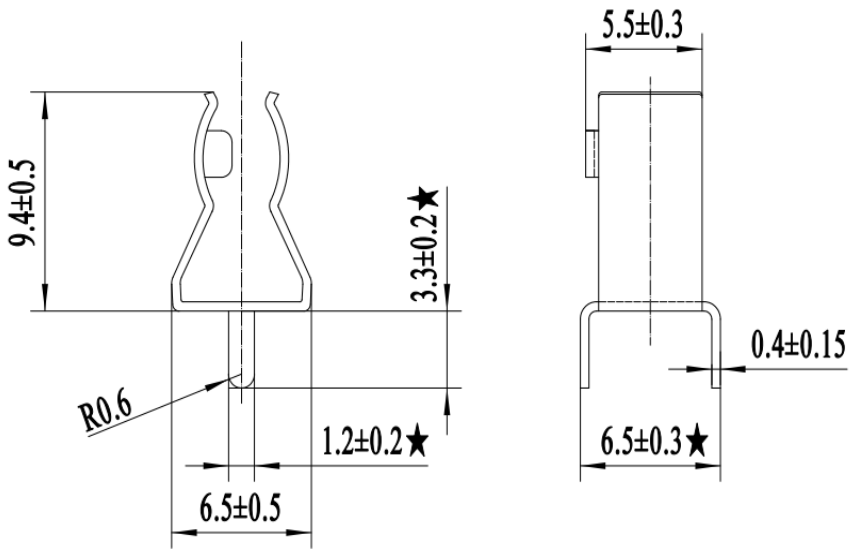

Note: Base products are plated with bright Ni;

Welding parameters recommended

1.Wave soldering

Pre-heating		
Temp(℃)	Recommended	100℃
	Recommended	150℃
Pre-heating(s):		60~180s
Welding		
Tin pot recommended		260℃ Max
Welding duration time (s):		2~5s

2. Manual welding

Soldering iron temp(℃):	350±5℃
Heating time (s):	5s Max

Note: The above two soldering parameters are applicable to lead-free solder, detailed parameters for other soldering methods are to be confirmed separately;