

## ESPRESSObin ULTRA- Quick Start Guide -Rev 03

### Revision History

Date	Revision	Board Rev	Description
Oct 21, 2019	Rev 01	V0-0-0	
Dec 02, 2019	Rev 02	V0-0-0	Add pictures with enclosure on page 4 Add DIN RAIL mounting on page 18 Package contents modified in Section B
Mar 03, 2020	Rev 03	V0-0-0	Reorganize the index table

## Index

A.	Appearance.....	4
	A-1. Front view.....	4
	A-2. Back view.....	4
	A-3. PCBA.....	5
B.	Package contents.....	6
C.	Key Features.....	7
D.	Locations of All I/O Connectors and Major Parts .....	8
	D-1. Top Side .....	8
	D-2. Top Side connectors and significant parts .....	9
	D-3. Bottom Side.....	10
	D-4. Bottom Side connectors and significant parts.....	11
E.	User interfaces.....	12
	E-1. J1- JTAG debugger Pin definition .....	12
	E-1-1. J1- JTAG debugger schematic.....	12
F.	Bootstrap wire jumpers.....	13
	F-1. Boot Mode – J11, J3, J10 .....	13
G.	Block Diagram.....	14
H.	Board Dimensions.....	15
	H-1. Top Side silkscreen .....	15
	H-2. Bottom Side silkscreen .....	16
I.	Cable connection for testing.....	17
J.	DIN rail mounting.....	18
K.	Preparation for power on.....	19
	K-1. Hardware:.....	19
	K-2. Software: .....	19
L.	Find com port and connect with putty .....	20
M.	Start running ESPRESSOBIN ULTRA.....	22
	M-1. Check U-boot version and some system information.....	22
	M-2. Login root with password “admin” .....	23
	M-3. Check the login name and the current path.....	24
	M-4. Check the kernel version .....	24
	M-5. Check the CPU information .....	24
	M-5-1. check with command “cat /proc/cpuinfo” .....	25
	M-5-2. check with lscpu command .....	25
	M-6. Check the Ethernet connection.....	26

---

M-6-1. heck with ifconfig command.....	26
M-6-2. Ping to verify the connection.....	28
M-6-3. Connect to uap0 .....	29
M-7. Check USB connection .....	30
M-7-1. Check USB device without USB disk plugged.....	30
M-7-2. Check USB device with 2 USB disks plugged and found .....	30
M-8. Check storage devices .....	31
M-8-1. cat /proc/partitions command .....	31
M-8-2. fdisk -l command.....	32
M-9. Top command .....	34

## A. Appearance


### A-1. Front view



### A-2. Back view



### A-3. PCBA

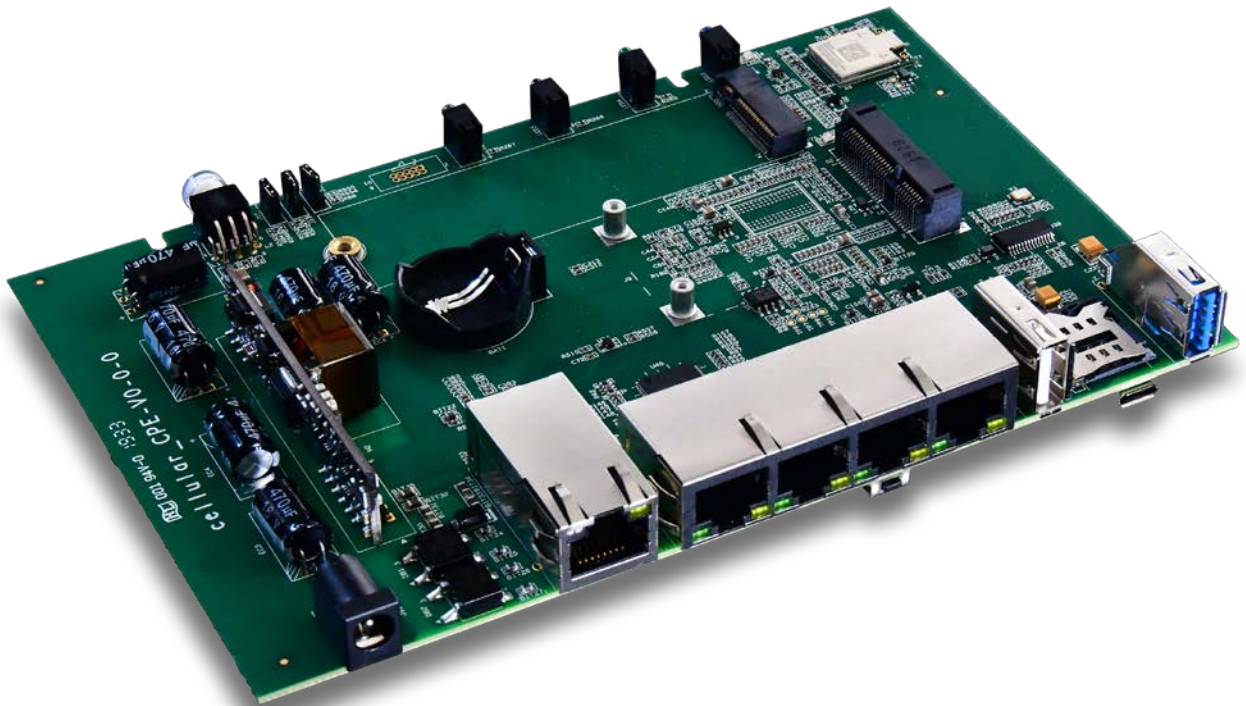

## B. Package contents


	Content List		Remark
1	ESPRESSOBIN ULTRA	1 unit	PCBA with enclosure
2	USB to Micro-USB Cable	1 pc	For debugging console
3	WiFi /BT Antenna	2 pcs	2.4GHz/5GHz dual band
4.	Wall mount DIN rail hook	2 pcs	See section J
5	Warranty card	1 pc	
Optional	AC to DC 12V Power Adapter	1 pc	Input 90-240VAC / output 12V,2A DC
Optional	4G/ LTE Antenna	2 pcs	4G/LTE Antenna

## C. Key Features

<b>SoC</b>	<ul style="list-style-type: none"> <li>• Marvell ARMADA 3720</li> <li>• Dual Core ARMv8 Cortex-A53</li> <li>• CPU frequency @1200MHz</li> </ul>
<b>Memory</b>	<ul style="list-style-type: none"> <li>• 1 GB / 2GB DDR4 -16bit</li> </ul>
<b>Storage</b>	<ul style="list-style-type: none"> <li>• 4MB SPI NOR flash</li> <li>• 8GB eMMC flash</li> <li>• SATA SSD socket -M.2-2280</li> </ul>
<b>Ethernet</b>	<ul style="list-style-type: none"> <li>• 1x Gb RJ45 WAN with POE input</li> <li>• 4x GB RJ45 LAN</li> </ul>
<b>Wireless</b>	<ul style="list-style-type: none"> <li>• 802.11 a/b/g/n + ac/ 2T2R WiFi +BT4.2 -on board with mini-PCle interface</li> </ul>
<b>USB</b>	<ul style="list-style-type: none"> <li>• 1x USB 3.0 type A</li> <li>• 1x USB 2.0 type A</li> <li>• 1x micro USB UART port for debug console</li> </ul>
<b>Expansion</b>	<ul style="list-style-type: none"> <li>• 1x M.2-2280 SSD socket</li> <li>• 1x Mini-PCle 2.0 socket with USB2.0 interface for 3G/4G LTE</li> <li>• 1x SIM card slot</li> </ul>
<b>Debugging</b>	<ul style="list-style-type: none"> <li>• 1x JTAG Cortex port, 10-pin</li> <li>• 1x micro USB UART connector</li> </ul>
<b>Miscellaneous</b>	<ul style="list-style-type: none"> <li>• DC 12V power Jack</li> <li>• Genuine POE power input through WAN port</li> <li>• 4x Software controlled LEDs</li> <li>• Power on/off button with LED indication</li> <li>• Reset button</li> </ul>

## D. Locations of All I/O Connectors and Major Parts

### D-1. Top Side

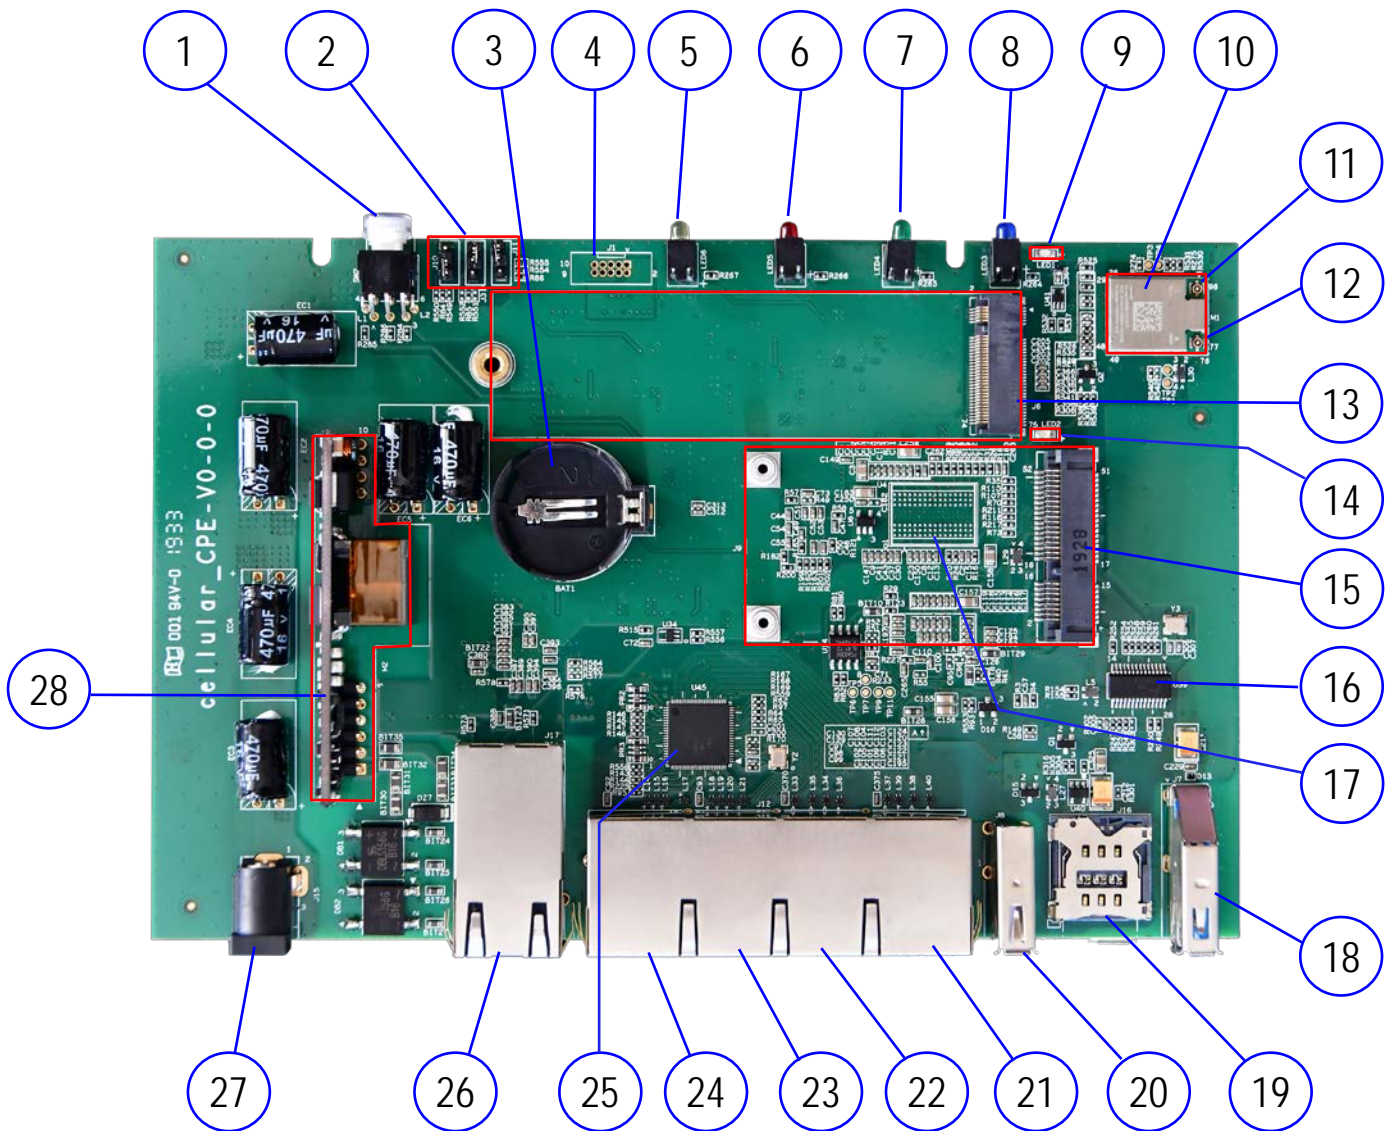




## D-2. Top Side connectors and significant parts

No.	Part location	Description 1	Description 2
1	SW2	Power Switch	With LED indication
2	J11/ J3/ J10	MPP1_7/MPP1_6/MPP1_5	Boot Mode selection <a href="#">*see section F-1</a>
3	BAT1	CR2032 /3V battery	Power for Real Time Clock
4	J1	JTAG Debugger (not populated)	5x2 pins, <a href="#">*see section E-1</a>
5	LED6	Yellow color	MPP1_14 Software-driven (3.3V)
6	LED5	Red color	MPP1_13 Software-driven (3.3V)
7	LED4	Green color	MPP1_12 Software-driven (3.3V)
8	LED3	Blue color	MPP1_11 Software-driven (3.3V)
9	LED1	Green color	M.2 SSD LED (3.3V) connected to J6
10	M1	WiFi module 8.2.11/a/b/g/n/ac 2T2R WIFI +BT4.2 LE	PCIe M.2 type 1216
11	M1 Antenna	WiFi Ant_B/ BT Ant	U.FL Micro coaxial connector 2.0mmx 2.0mm
12	M1 Antenna	WiFi Ant_A	U.FL Micro coaxial connector 2.0mmx 2.0mm
13	J6	SATA SSD connector	M.2-22mmx 80mm
14	LED2	Green color	USIM LED (3.3V) connected to J9
15	J9	3G/4G LTE mini-PCIe connector	1) With s USB 2.0 signals only 2) Connect to SIM card slot J16
16	U39	USB2.0/ 4-port HUB	
17	U4	SDRAM Rank2	16bit DDR4
18	J7	USB3.0 type A	
19	J16	SIM card nano slot	Controlled by J9
20	J8	USB2.0 type A	Downstream from U39 USB HUB
21	J12-D	RJ45	1Gb RJ45-LAN#4
22	J12-C	RJ45	1Gb RJ45-LAN#3
23	J12-B	RJ45	1Gb RJ45-LAN#2
24	J12-A	RJ45	1Gb RJ45-LAN#1
25	U45	Gb ethernet switch	6-port switch to J12-A/B/C/D and J17
26	J17	RJ45 with POE	1Gb RJ45 for WAN / POE power IN
27	J15	DC jack for 12VDC in	Center positive 2.1mm diameter
28	M2	POE module	DC12V/30W output, 802.3at/ 802.3af compliant

### D-3. Bottom Side

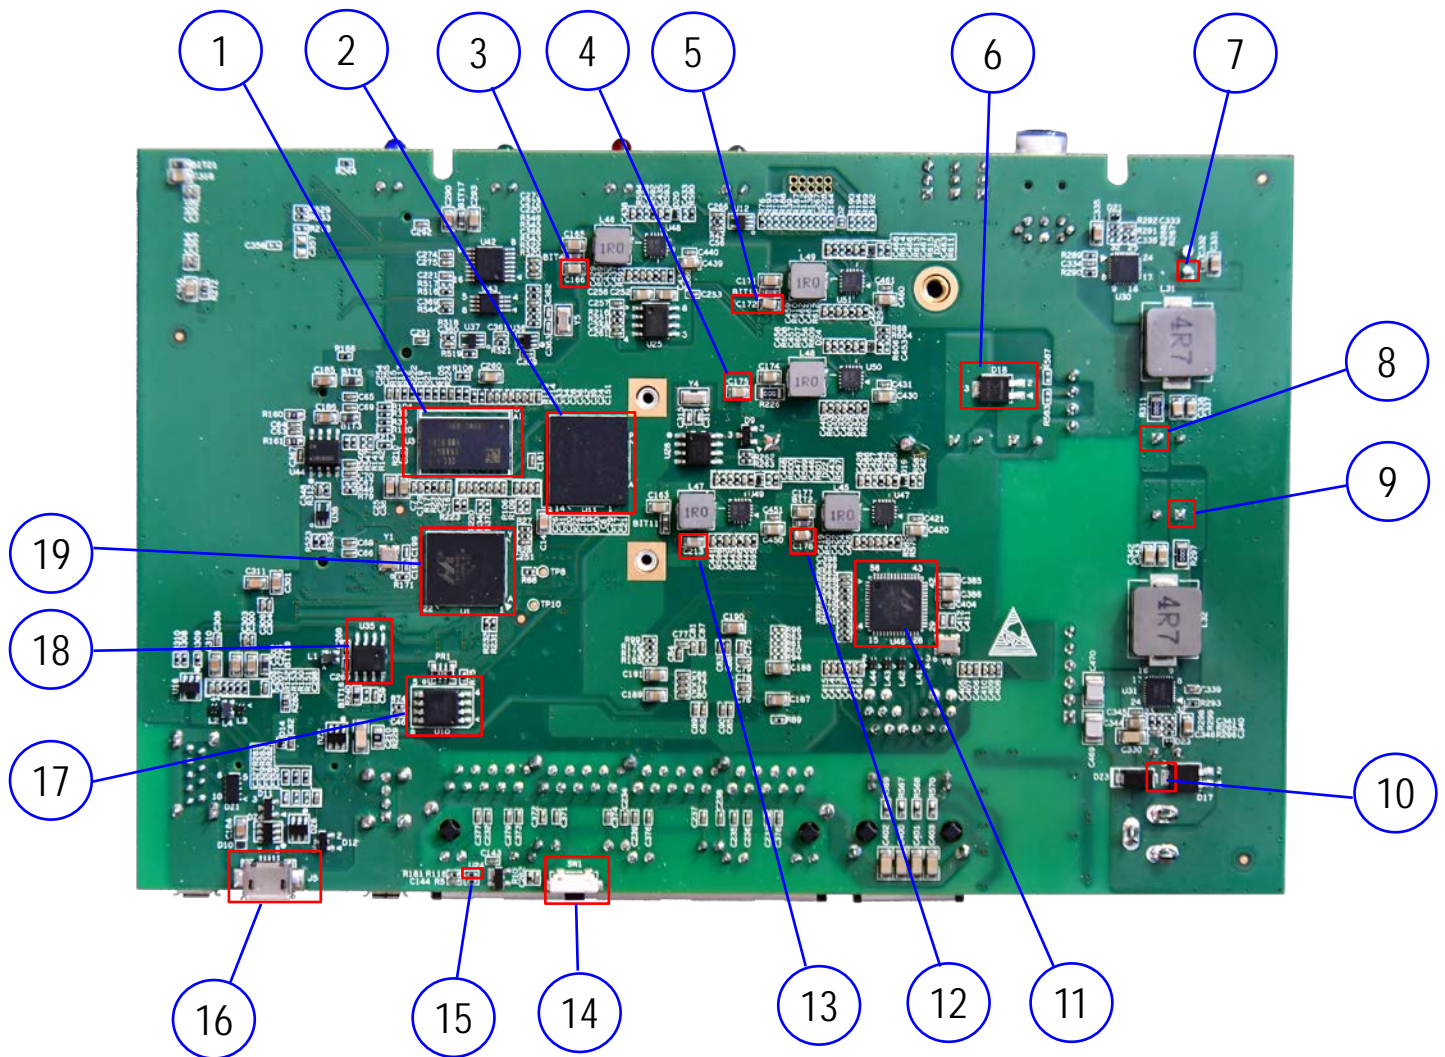


## D-4. Bottom Side connectors and significant parts

Number	Part location	Name	
1	U3	SDRAM Rank1	16bit DDR4 (1GB)
2	U11	eMMC	8GB-8bit
3	C166	+1.2V (+DDR_VCC) power rail	5 <sup>th</sup> power stage
4	C175	+1.1V (CPU_VCore)power rail	7 <sup>th</sup> power stage
5	C172	+1.8V power rail	3 <sup>rd</sup> power stage
6	D18	+12V POE output diode	Pin1/pin2 in, pin3 out to +12V power rail
7	EC1	+12V power rail	1 <sup>st</sup> power stage (input)
8	EC2	+5V power rail	1 <sup>st</sup> power stage (output)
9	EC4	+3.3V power rail	2 <sup>nd</sup> power stage
10	D17	+12V DC power input diode	Pin1/pin2 in, pin3 out to +12V power rail
11	U46	Gb Ethernet PHY	Connected to J17
12	C178	+1.5V power rail	4 <sup>th</sup> power stage
13	C213	+1.15V power rail	6 <sup>th</sup> power stage
14	SW1	Reset switch	Press down to pull low MRn
15	R116	MRn	Low active master reset signal to CPU's SYSRSTn
16	J5	Micro-USB for console	UART1
17	U10	SPI NOR Flash Boot ROM	4MB
18	U35	UART to USB bridge	
19	U1	Marvell A3720 SoC	




## F. Bootstrap wire jumpers

### F-1. Boot Mode – J11, J3, J10

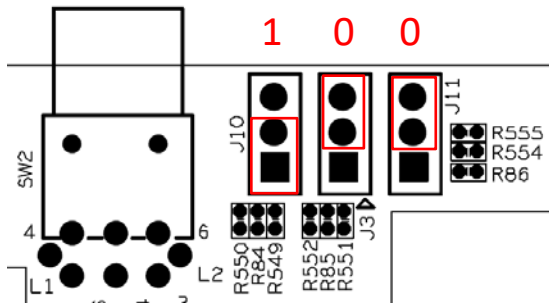


MPP1\_[7:5]

- 1 : Serial NOR Flash Download Mode.
- 2 : eMMC Download Mode.
- 3 : eMMC Alternate Download Mode.
- 4 : SATA Download Mode.
- 5 : Serial NAND Flash Download Mode.
- 6 : UART Mode.
- 7 : SD Card.

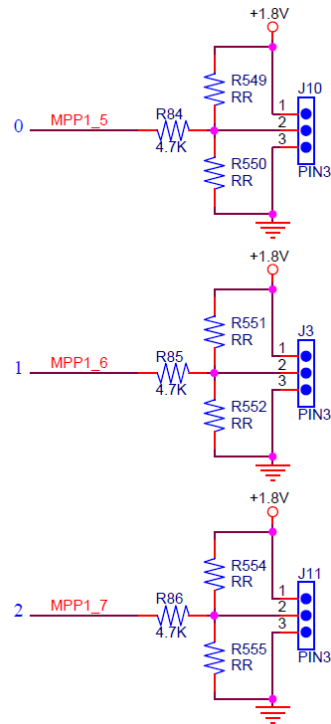


ESPRESSOBIN ULTRA Boot Mode	MPP1_7 (J14)	MPP1_6 (J13)	MPP1_5 (J12)	Hex
Serial NOR Flash Download Mode	0	0	1	0x1
eMMC Download Mode	0	1	0	0x2
eMMC Alternate Download Mode	0	1	1	0x3
SATA Download Mode	1	0	0	0x4
Serial NAND Flash Download Mode	1	0	1	0x5
UART Mode	1	1	0	0x6
Reserved	1	1	1	0x7

## G. Block Diagram

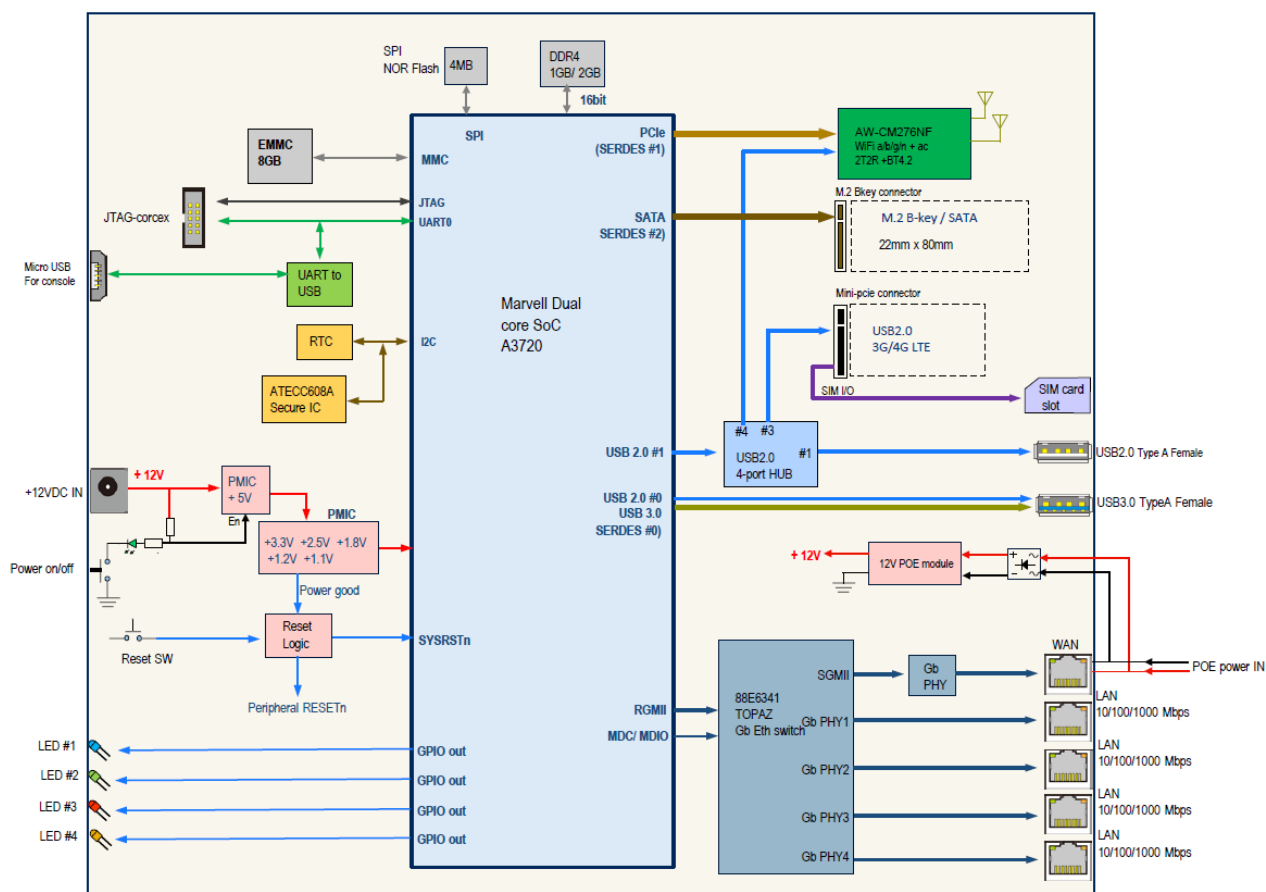


## H. Board Dimensions

### H-1. Top Side silkscreen

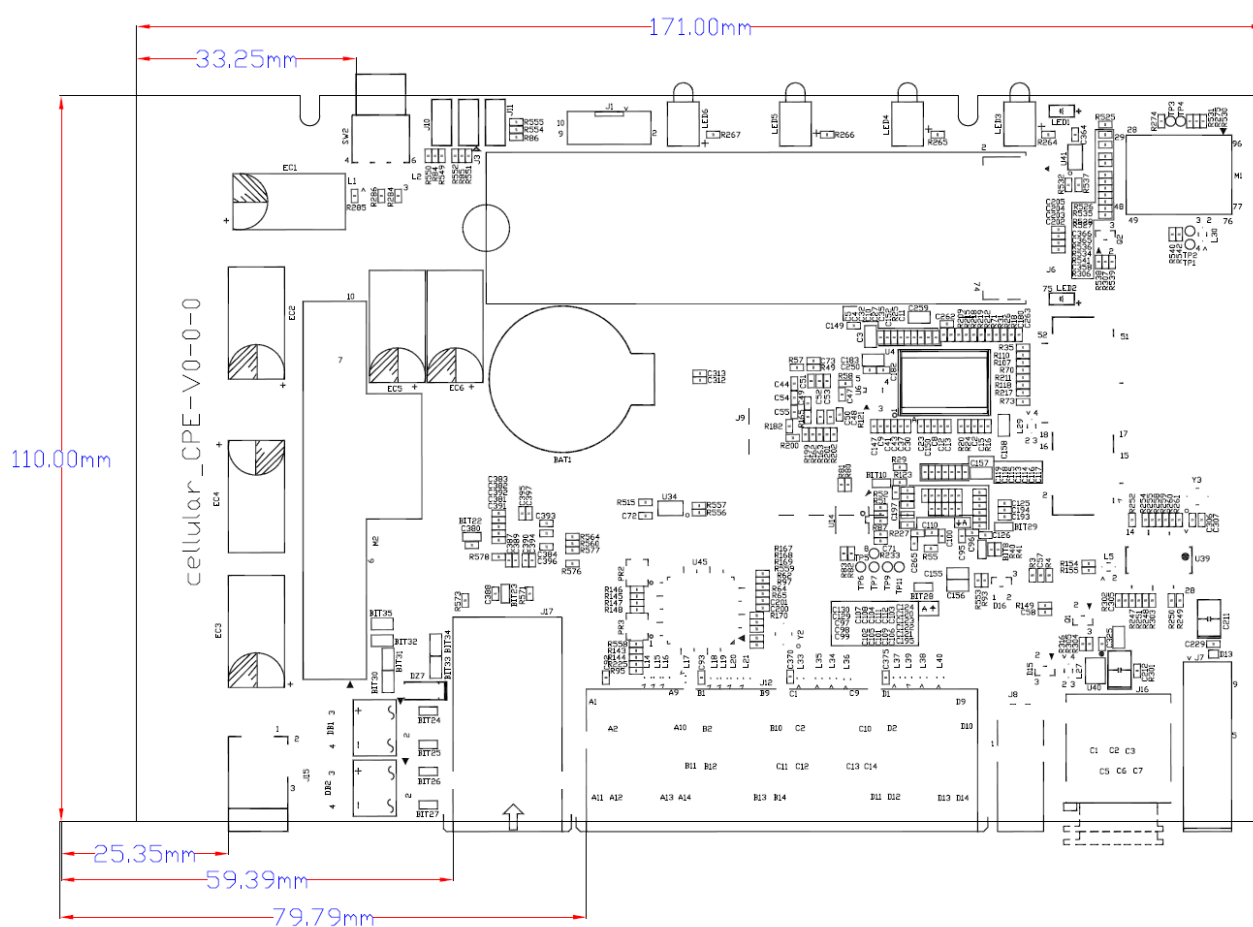


## H-2. Bottom Side silkscreen

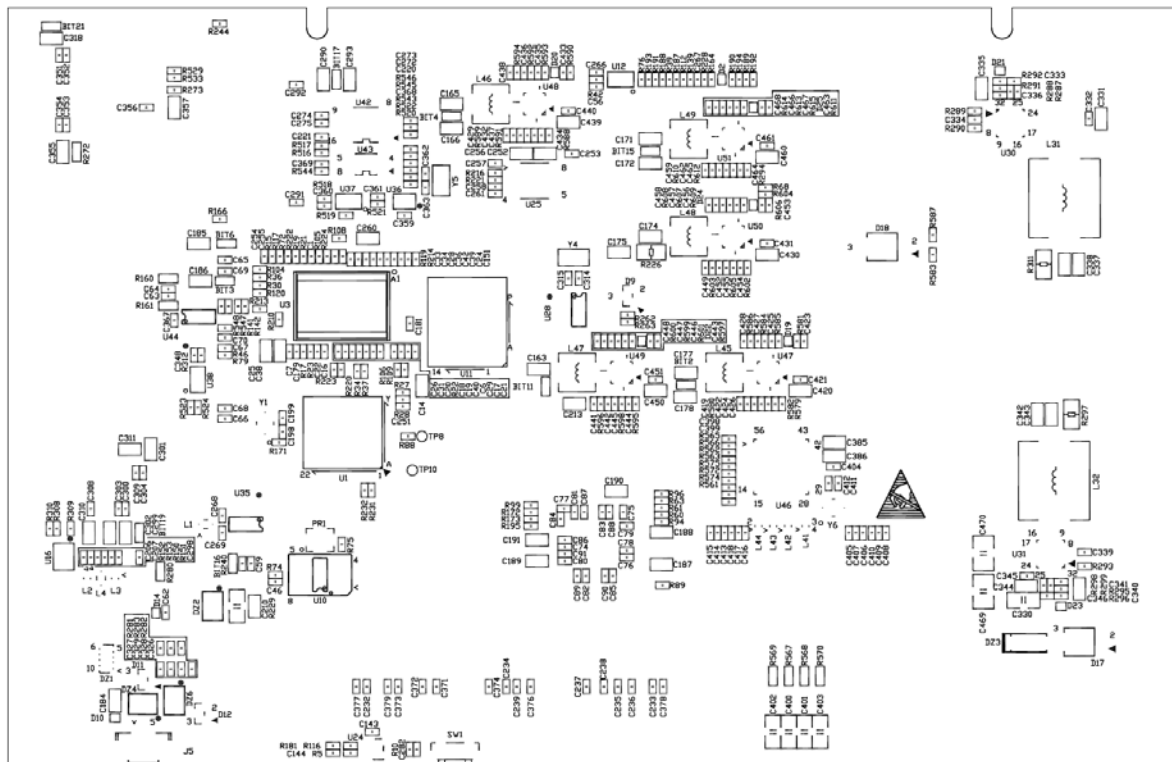



## I. Cable connection for testing

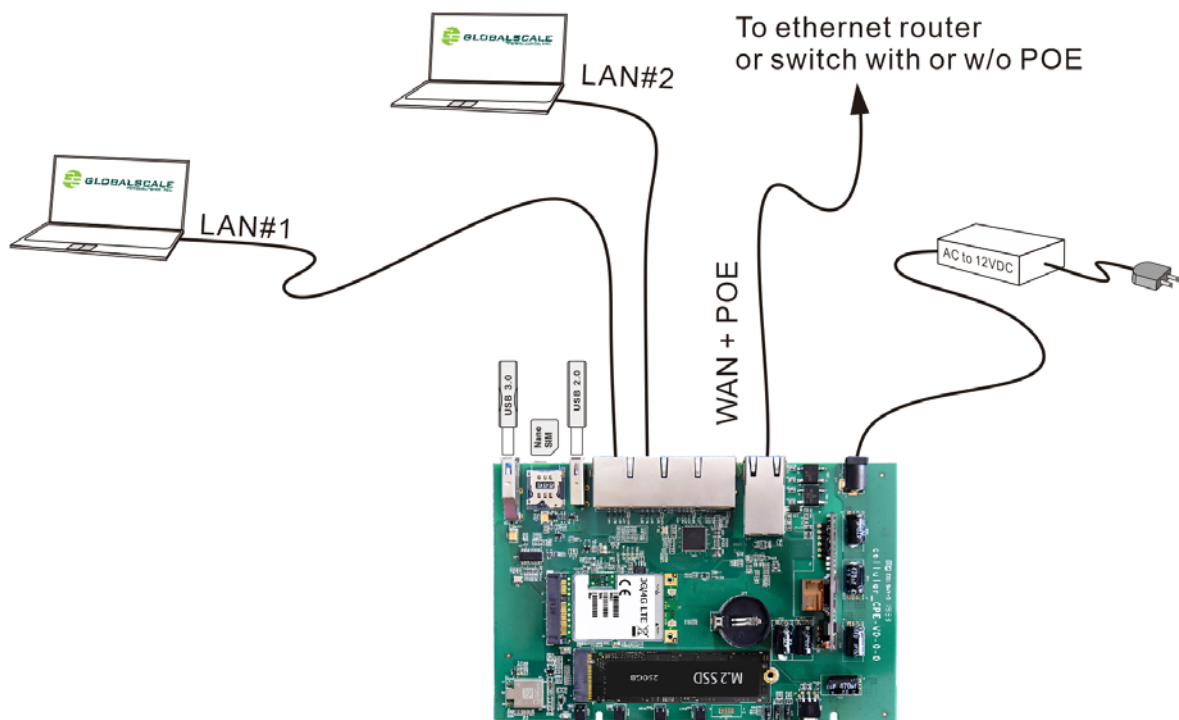


## J. DIN rail mounting

There are two MK-048 (10mmLx43mmWx 19mmH) DIN rail mounting pieces on the back of ESPRESSObin enclosure as shown in the picture below.



Please use the appropriate DIN RAIL like MK-070 or similar for mounting on the wall.

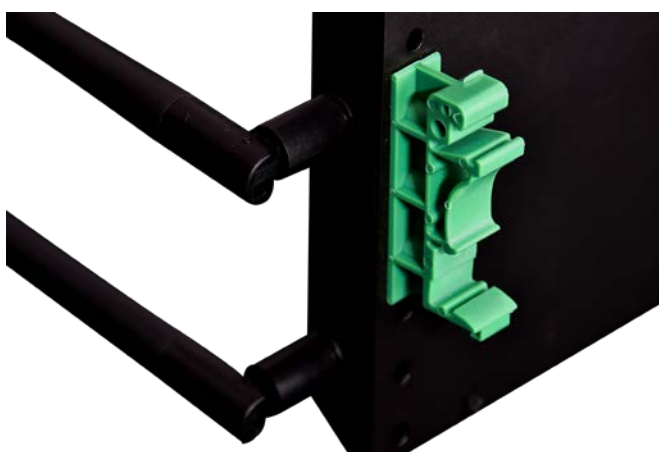

## K. Preparation for power on

### K-1. Hardware:

- a. Linux PC installed with minicom, putty or Windows PC installed with putty
- b. ESPRESSOBIN ULTRA unit
- c. Connect Ethernet cable from IP router or IP switch (optional) to WAN port with or without POE power
- d. USB3.0 Flash disks (optional)
- e. USB2.0 Flash disks (optional)
- f. 3G/ 4G LTE module (optional)
- g. M.2 2280 SSD module (optional)

### K-2. Software:


- a. Putty for Linux or Windows PC  
Please go on web and download putty.exe

Visit the following web site for more information


<http://www.globalscaletechnologies.com/t-downloads.aspx>

## L. Find com port and connect with putty

1. Connect ESPRESSOBIN ULTRA's micro-USB port (J5) to PC's USB port by USB cable
2. Go to [my computer] [device manager] and you will see a new COM port after plugging in the USB cable, here is COM4 for example

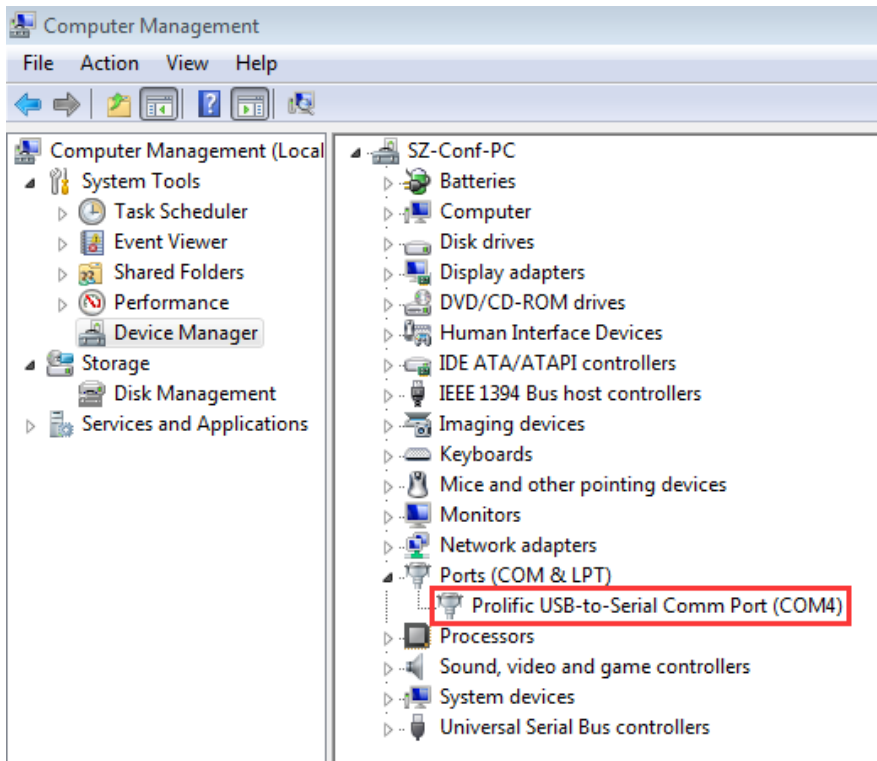

3. Run putty, select serial connection then enter the COM port you've found in the previous step, The baud rate speed is 115200 then press "open"

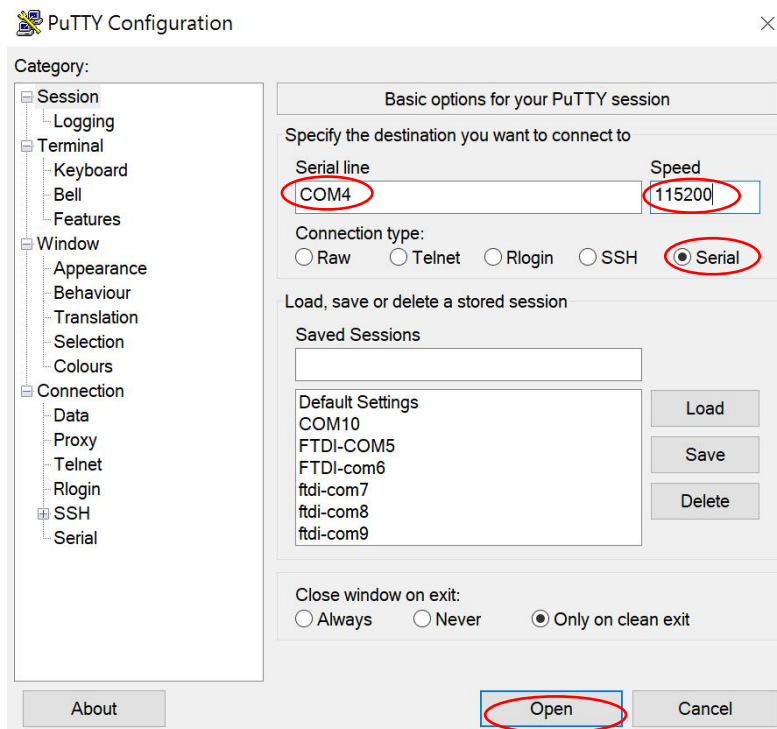

## M. Start running ESPRESSOBIN ULTRA

### M-1. Check U-boot version and some system information

Power on the board then press enter to terminate uboot running, you can see messages on screen like the followings

```

Ubuntu 18.04 LTS ccpe999904 ttyMV0

#####
the default root password is 'admin'.
#####

ccpe999904 login: TIM-1.0
WTMI-devel-18.12.1-67f01b7
WTMI: system early-init
SVC REV: 5, CPU VDD voltage: 1.213V
NOTICE: Booting Trusted Firmware
NOTICE: BL1: v1.5(release):711ecd32 (Marvell-armada-18.09.4)
NOTICE: BL1: Built : 15:20:15, Sep 18 2019
NOTICE: BL1: Booting BL2
NOTICE: BL2: v1.5(release):711ecd32 (Marvell-armada-18.09.4)
NOTICE: BL2: Built : 15:20:18, Sep 18 2019
NOTICE: BL1: Booting BL31
NOTICE: BL31: v1.5(release):711ecd32 (Marvell-armada-18.09.4)
NOTICE: BL31: Built : 15

U-Boot 2017.03-armada-18.09.1-g51aa6c4772 (Sep 18 2019 - 15:19:13 +0800)

Model: gti cellular cpe board
  CPU      1200 [MHz]
  L2       1200 [MHz]
  NB AXI   300 [MHz]
  SB AXI   250 [MHz]
  DDR      750 [MHz]
DRAM:  1 GiB
U-Boot DT blob at : 000000003f716f38
SF: Detected mx25u3235f with page size 256 Bytes, erase size 64 KiB, total 4 MiB
Comphy chip #0:
Comphy-0: USB3_HOST0
Comphy-1: PEX0          2.5 Gbps
Comphy-2: SATA0
SATA link 0 timeout.
AHCI 0001.0300 32 slots 1 ports 6 Gbps 0x1 impl SATA mode
flags: ncq led only pmp fbss pio slum part sxs
PCIE-0: Link up
MMC:  sdhci@d8000: 0
Net:  eth0: neta@30000 [PRIME]
Hit any key to stop autoboot:  0
Marvell>> <INTERRUPT>

```

```
Marvell>>
Marvell>> boot
```

Enter “boot” to continue boot up if interrupted.

## M-2. Login root with password “admin”

```
#####
the default root password is 'admin'.
#####

ccpe999904 login: root
Password:
Last login: Wed Oct  9 01:12:03 UTC 2019 on ttyMV0
Welcome to Ubuntu 18.04 LTS (GNU/Linux 4.19.62-00013-gf37d8da9d13e aarch64)

* Documentation:  https://help.ubuntu.com
* Management:    https://landscape.canonical.com
* Support:       https://ubuntu.com/advantage

  _____
 |  _ \| _ \| _ \| _ \| | |
 | |_) | _ \| _ \| _ \|
 |  _ \| _ \| _ \| _ \|
 | |_) | _ \| _ \| _ \|
 |  _ \| _ \| _ \| _ \|
 | |_) | _ \| _ \| _ \|
 |  _ \| _ \| _ \| _ \|

Welcome to Cellulr CPE development board!

For security reason, we recommended to change the password after first login.

Do you want to change default password? [Y/n]:
```

You may decide here whether to change the password or not?

### M-3. Check the login name and the current path

```
root@ccpe999904:~# whoami
root
root@ccpe999904:~# pwd
/root
root@ccpe999904:~#
```

### M-4. Check the kernel version

Enter command: `uname -a`

```
root@ccpe999904:~# uname -a
Linux ccpe999904 4.19.62-00013-gf37d8da9d13e #33 SMP PREEMPT Wed Sep 18 07:43:37 CST 2019 aarch64
aarch64 aarch64 GNU/Linux
root@ccpe999904:~#
```

### M-5. Check the CPU information



### M-5-1. check with command “cat /proc/cpuinfo”

There are 2 processors as you shall see

```

root@ccpe999904:/# cd ..
root@ccpe999904:/# pwd
/
root@ccpe999904:/# cat /proc/cpuinfo
processor          : 0
BogoMIPS          : 25.00
Features           : fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid
CPU implementer   : 0x41
CPU architecture: 8
CPU variant       : 0x0
CPU part          : 0xd03
CPU revision      : 4

processor          : 1
BogoMIPS          : 25.00
Features           : fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid
CPU implementer   : 0x41
CPU architecture: 8
CPU variant       : 0x0
CPU part          : 0xd03
CPU revision      : 4

root@ccpe999904:/#

```

### M-5-2. check with lscpu command

```

root@ccpe999904:/# lscpu
Architecture:      aarch64
Byte Order:        Little Endian
CPU(s):            2
On-line CPU(s) list: 0,1
Thread(s) per core: 1
Core(s) per socket: 2
Socket(s):         1
NUMA node(s):     1
Vendor ID:         ARM
Model:             4
Model name:        Cortex-A53
Stepping:          r0p4
CPU max MHz:       1200.0000
CPU min MHz:       200.0000
BogoMIPS:          25.00
NUMA node0 CPU(s): 0,1
Flags:             fp asimd evtstrm aes pmull sha1 sha2 crc32 cpuid
root@ccpe999904:/#

```

## M-6. Check the Ethernet connection

### M-6-1. heck with ifconfig command

Connect RJ45 cable from the WAN port to the ethernet router or switch  
type in “ifconfig”

```
root@ccpe999904:/# ifconfig
br0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.84.1 netmask 255.255.255.0 broadcast 192.168.84.255
    inet6 fe80::f2ad:4eff:fe0b:f533 prefixlen 64 scopeid 0x20<link>
    ether f0:ad:4e:0b:f5:33 txqueuelen 1000 (Ethernet)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 15 bytes 1146 (1.1 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

eth0: flags=4419<UP,BROADCAST,RUNNING,PROMISC,MULTICAST> mtu 1500
    inet6 fe80::251:82ff:fe11:2200 prefixlen 64 scopeid 0x20<link>
    ether 00:51:82:11:22:00 txqueuelen 1024 (Ethernet)
    RX packets 79 bytes 7933 (7.9 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 53 bytes 5246 (5.2 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
    device interrupt 12

lan0: flags=4099<UP,BROADCAST,MULTICAST> mtu 1500
    ether f0:ad:4e:99:99:00 txqueuelen 1000 (Ethernet)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 0 bytes 0 (0.0 B)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lan1: flags=4099<UP,BROADCAST,MULTICAST> mtu 1500
    ether f0:ad:4e:99:99:01 txqueuelen 1000 (Ethernet)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 0 bytes 0 (0.0 B)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lan2: flags=4099<UP,BROADCAST,MULTICAST> mtu 1500
    ether f0:ad:4e:99:99:02 txqueuelen 1000 (Ethernet)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 0 bytes 0 (0.0 B)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

## Ifconfig command (continued)

```
lan3: flags=4099<UP,BROADCAST,MULTICAST> mtu 1500
    ether f0:ad:4e:99:99:03 txqueuelen 1000 (Ethernet)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 0 bytes 0 (0.0 B)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 6584 bytes 395690 (395.6 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 6584 bytes 395690 (395.6 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

uap0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet6 fe80::f2ad:4eff:fe0b:f533 prefixlen 64 scopeid 0x20<link>
    ether f0:ad:4e:0b:f5:33 txqueuelen 1000 (Ethernet)
    RX packets 0 bytes 0 (0.0 B)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 0 bytes 0 (0.0 B)
    TX errors 30 dropped 0 overruns 0 carrier 0 collisions 0

wan: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.3.19 netmask 255.255.255.0 broadcast 192.168.3.255
    inet6 fe80::f2ad:4eff:fe99:9904 prefixlen 64 scopeid 0x20<link>
    ether f0:ad:4e:99:99:04 txqueuelen 1000 (Ethernet)
    RX packets 79 bytes 6195 (6.1 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 37 bytes 3714 (3.7 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

root@ccpe999904:/#
```


## M-6-2. Ping to verify the connection

```
root@ccpe999904:~# ping -c 10 www.google.com
PING www.google.com (216.58.200.228) 56(84) bytes of data.
64 bytes from tsa03s01-in-f228.1e100.net (216.58.200.228): icmp_seq=1 ttl=52 time=53.5 ms
64 bytes from tsa03s01-in-f228.1e100.net (216.58.200.228): icmp_seq=2 ttl=52 time=46.2 ms
64 bytes from tsa03s01-in-f228.1e100.net (216.58.200.228): icmp_seq=3 ttl=52 time=139 ms
64 bytes from tsa03s01-in-f228.1e100.net (216.58.200.228): icmp_seq=4 ttl=52 time=158 ms
64 bytes from tsa03s01-in-f228.1e100.net (216.58.200.228): icmp_seq=5 ttl=52 time=58.1 ms
64 bytes from tsa03s01-in-f228.1e100.net (216.58.200.228): icmp_seq=6 ttl=52 time=53.6 ms
64 bytes from tsa03s01-in-f228.1e100.net (216.58.200.228): icmp_seq=7 ttl=52 time=48.0 ms
64 bytes from tsa03s01-in-f228.1e100.net (216.58.200.228): icmp_seq=8 ttl=52 time=49.7 ms
64 bytes from tsa03s01-in-f228.1e100.net (216.58.200.228): icmp_seq=9 ttl=52 time=47.7 ms
64 bytes from tsa03s01-in-f228.1e100.net (216.58.200.228): icmp_seq=10 ttl=52 time=56.5 ms

--- www.google.com ping statistics ---
10 packets transmitted, 10 received, 0% packet loss, time 9006ms
rtt min/avg/max/mdev = 46.237/71.214/158.941/39.425 ms
root@ccpe999904:~#
root@ccpe999904:~#
root@ccpe999904:~# ping -c 10 www.baidu.com
PING www.wshifen.com (103.235.46.39) 56(84) bytes of data.
64 bytes from 103.235.46.39 (103.235.46.39): icmp_seq=1 ttl=52 time=73.5 ms
64 bytes from 103.235.46.39 (103.235.46.39): icmp_seq=2 ttl=52 time=63.2 ms
64 bytes from 103.235.46.39 (103.235.46.39): icmp_seq=3 ttl=52 time=71.8 ms
64 bytes from 103.235.46.39 (103.235.46.39): icmp_seq=4 ttl=52 time=70.3 ms
64 bytes from 103.235.46.39 (103.235.46.39): icmp_seq=5 ttl=52 time=82.1 ms
64 bytes from 103.235.46.39 (103.235.46.39): icmp_seq=6 ttl=52 time=79.0 ms
64 bytes from 103.235.46.39 (103.235.46.39): icmp_seq=7 ttl=52 time=74.2 ms
64 bytes from 103.235.46.39 (103.235.46.39): icmp_seq=8 ttl=52 time=81.5 ms
64 bytes from 103.235.46.39 (103.235.46.39): icmp_seq=9 ttl=52 time=71.9 ms
64 bytes from 103.235.46.39 (103.235.46.39): icmp_seq=10 ttl=52 time=117 ms

--- www.wshifen.com ping statistics ---
10 packets transmitted, 10 received, 0% packet loss, time 17014ms
rtt min/avg/max/mdev = 63.239/78.497/117.013/13.915 ms
root@ccpe999904:~#
root@ccpe999904:~#
```

### M-6-3. Connect to uap0

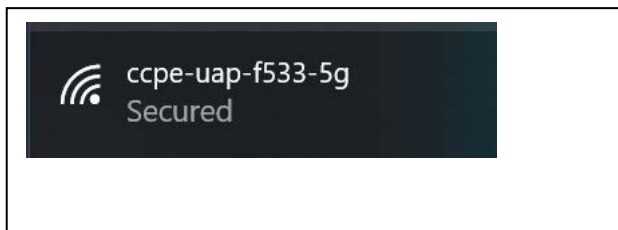

The password is '12345678'

below is uap0 information

```
SSID: ccpe-uap-f533-5g
Protocol: 802.11ac
Security type: WPA2-Personal
Network band: 5 GHz
Network channel: 36
Link-local IPv6 address: fe80::b18f:f5bc:f0d1:639b%9
IPv4 address: 192.168.84.123
IPv4 DNS servers: 192.168.84.1
Driver version: 2024.0.4.105
Physical address (MAC): B0-C0-90-BB-20-09
```

## M-7. Check USB connection

### M-7-1. Check USB device without USB disk plugged

Enter command: lsusb

Here are 1 USB3.0 port and 2 USB2.0 ports (one with USB3.0) found.

```
root@ccpe999904:~# lsusb
Bus 001 Device 003: ID 1286:204e Marvell Semiconductor, Inc.
Bus 001 Device 002: ID 1a40:0101 Terminus Technology Inc. Hub
Bus 001 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
Bus 003 Device 001: ID 1d6b:0003 Linux Foundation 3.0 root hub
Bus 002 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
root@ccpe999904:~#
```

### M-7-2. Check USB device with 2 USB disks plugged and found

After inserting 1 USB2.0 flash disk and another USB3.0 flash disk

```
root@ccpe999904:~# lsusb
Bus 001 Device 003: ID 1286:204e Marvell Semiconductor, Inc.
Bus 001 Device 004: ID 0930:6545 Toshiba Corp. Kingston DataTraveler 102/2.0 / HEMA Flash Drive 2 GB / PNY Attache 4GB Stick
Bus 001 Device 002: ID 1a40:0101 Terminus Technology Inc. Hub
Bus 001 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
Bus 003 Device 002: ID 05dc:a838 Lexar Media, Inc.
Bus 003 Device 001: ID 1d6b:0003 Linux Foundation 3.0 root hub
Bus 002 Device 001: ID 1d6b:0002 Linux Foundation 2.0 root hub
root@ccpe999904:~#
```

USB2.0 Flash disk

USB3.0 Flash disk

## M-8. Check storage devices

### M-8-1. cat /proc/partitions command

```
root@ccpe999904:/# cat /proc/partitions
major minor #blocks name

 1         0    48000 ram0
31         0     3968 mtdblock0
31         1        64 mtdblock1
31         2        64 mtdblock2
179        0   7636800 mmcblk0
179        1   7635776 mmcblk0p1
 8         0   7843840 sda
 8         1   7839808 sda1
 8        16  15642624 sdb
 8        17  15642568 sdb1
root@ccpe999904:/#
```

USB2.0 Flash disk

USB3.0 Flash disk

## M-8-2. fdisk -l command

```

root@ccpe999904:/# fdisk -l
Disk /dev/ram0: 46.9 MiB, 49152000 bytes, 96000 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 4096 bytes
I/O size (minimum/optimal): 4096 bytes / 4096 bytes

Disk /dev/mtdblock0: 3.9 MiB, 4063232 bytes, 7936 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes

Disk /dev/mtdblock1: 64 KiB, 65536 bytes, 128 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes

Disk /dev/mtdblock2: 64 KiB, 65536 bytes, 128 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes

Disk /dev/mmcblk0: 7.3 GiB, 7820083200 bytes, 15273600 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
Disklabel type: dos
Disk identifier: 0x89708921

Device          Boot Start      End  Sectors  Size Id Type
/dev/mmcblk0p1  *      2048 15273599 15271552   7.3G 83 Linux

```



Disk /dev/sda: 7.5 GiB, 8032092160 bytes, 15687680 sectors

Units: sectors of 1 \* 512 = 512 bytes

Sector size (logical/physical): 512 bytes / 512 bytes

I/O size (minimum/optimal): 512 bytes / 512 bytes

Disklabel type: dos

Disk identifier: 0x49cd83fb

Device	Boot Start	End	Sectors	Size	Id	Type
/dev/sda1	8064	15687679	15679616	7.5G	b	W95 FAT32

Disk /dev/sdb: 14.9 GiB, 16018046976 bytes, 31285248 sectors

Units: sectors of 1 \* 512 = 512 bytes

Sector size (logical/physical): 512 bytes / 512 bytes

I/O size (minimum/optimal): 512 bytes / 512 bytes

Disklabel type: dos

Disk identifier: 0xc3072e18

Device	Boot Start	End	Sectors	Size	Id	Type
/dev/sdb1	112	31285247	31285136	14.9G	c	W95 FAT32 (LBA)

root@ccpe999904:/# ^C

root@ccpe999904:/# ^C

root@ccpe999904:/# ^C

## M-9. Top command

```
top - 07:49:19 up 3:26, 1 user, load average: 0.12, 0.03, 0.01
Tasks: 101 total, 1 running, 53 sleeping, 0 stopped, 0 zombie
%Cpu(s): 0.2 us, 0.7 sy, 0.0 ni, 98.5 id, 0.0 wa, 0.5 hi, 0.2 si, 0.0 st
KiB Mem : 1016520 total, 802112 free, 61464 used, 152944 buff/cache
KiB Swap: 0 total, 0 free, 0 used. 882556 avail Mem

  PID USER      PR  NI   VIRT    RES    SHR S  %CPU  %MEM     TIME+ COMMAND
 3975 root        20   0   7672   3364   2780 R   1.3   0.3   0:00.42 top
 1060 root        20   0     0      0      0 S   0.7   0.0   0:44.86 d0032004.m+
   19 root         0 -20     0      0      0 I   0.3   0.0   0:02.33 kworker/1:
    1 root       20   0 160700   7808   5796 S   0.0   0.8   0:03.14 systemd
    2 root       20   0     0      0      0 S   0.0   0.0   0:00.04 kthreadd
    3 root         0 -20     0      0      0 I   0.0   0.0   0:00.00 rcu_gp
    4 root         0 -20     0      0      0 I   0.0   0.0   0:00.00 rcu_par_gp
    8 root         0 -20     0      0      0 I   0.0   0.0   0:00.00 mm_percpu_+
    9 root       20   0     0      0      0 S   0.0   0.0   0:00.14 ksoftirqd/0
   10 root       20   0     0      0      0 I   0.0   0.0   0:00.32 rcu_preempt
   11 root       20   0     0      0      0 I   0.0   0.0   0:00.02 rcu_sched
   12 root       20   0     0      0      0 I   0.0   0.0   0:00.00 rcu_bh
   13 root        rt    0     0      0      0 S   0.0   0.0   0:00.01 migration/0
   14 root       20   0     0      0      0 S   0.0   0.0   0:00.00 cpuhp/0
   15 root       20   0     0      0      0 S   0.0   0.0   0:00.00 cpuhp/1
   16 root        rt    0     0      0      0 S   0.0   0.0   0:00.01 migration/1
   17 root       20   0     0      0      0 S   0.0   0.0   0:00.02 ksoftirqd/1
```

=== End of File ===