


B

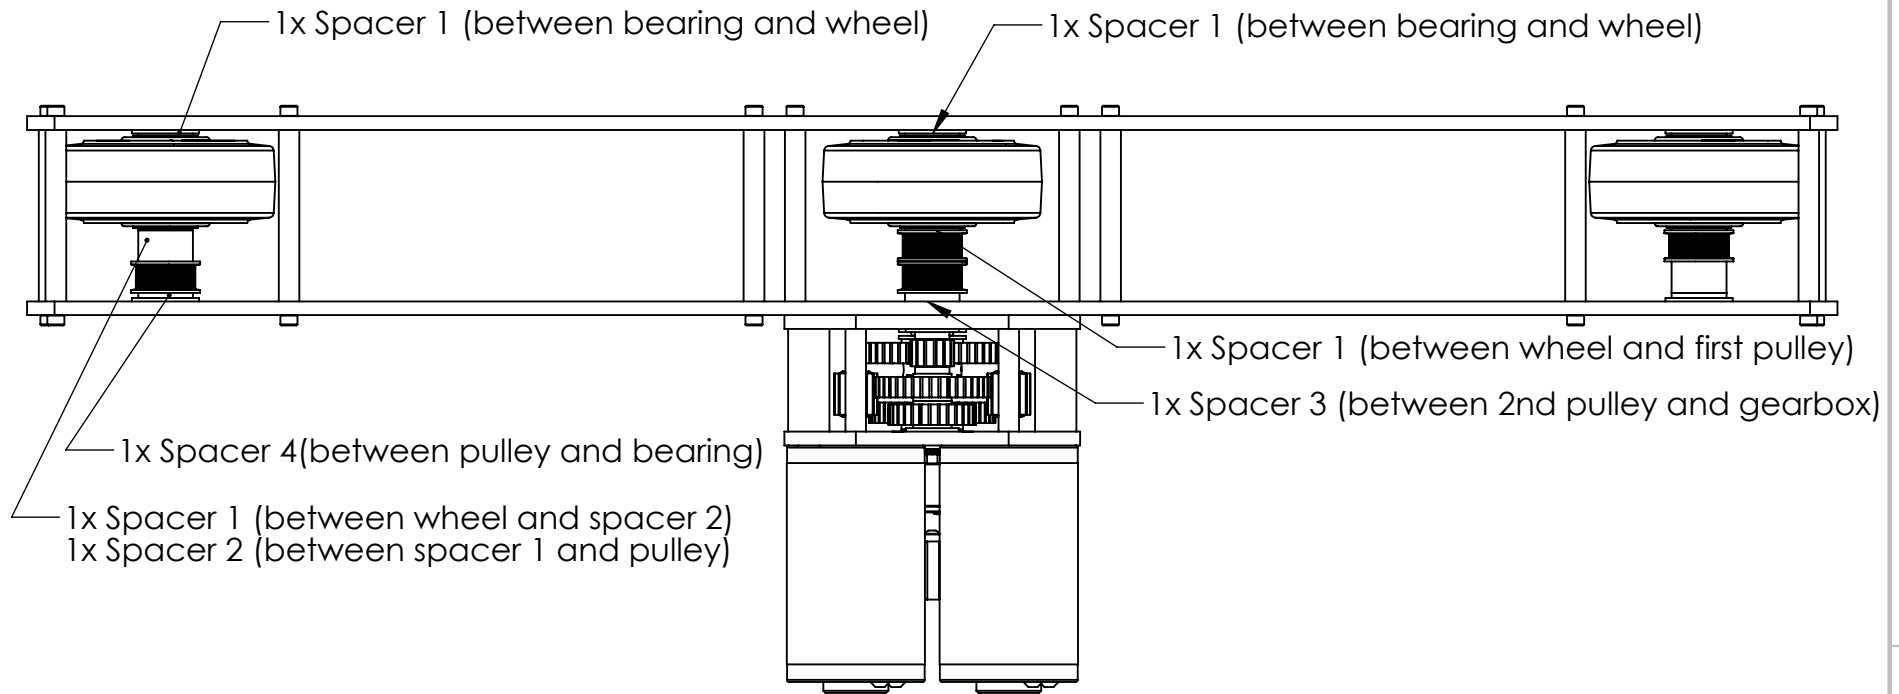

B

## NOTES:

- Both outer wheels have the same spacer stack,
- pulley and spacer 2 are flipped depending on the side
- All bearing flanges face towards the inside of the cartridge
- Bearings may interfere with frame while using 1/8" side plates,
- cartridges were designed for <1/4" carbon side plates
- All screws on the mounting side of the cartridge are to be changed
- to countersunk head 10-24 screws so that the cartridges sit flush on the frame

A

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS  
 DRAWING IS THE SOLE PROPERTY OF  
 SOLIDWORKS. IT IS TO BE USED ONLY  
 FOR ACADEMIC USE ONLY.  
 WITHOUT THE WRITTEN PERMISSION OF  
 SOLIDWORKS, NO PART OF THIS DOCUMENT IS  
 TO BE REPRODUCED OR TRANSMITTED IN ANY  
 FORM OR BY ANY MEANS, ELECTRONIC OR  
 MECHANICAL, INCLUDING PHOTOCOPYING,  
 RECORDING, OR BY ANY INFORMATION  
 STORAGE AND RETRIEVAL SYSTEM.

		UNLESS OTHERWISE SPECIFIED:	NAME	DATE	TITLE: 2017 Drive Cartridge Spacer Assembly			
		DIMENSIONS ARE IN INCHES	DRAWN	BrK				1/25/2017
		TOLERANCES:	CHECKED					
		FRACTIONAL ±	ENG APPR.					
		ANGULAR: MACH ±    BEND ±	MFG APPR.					
		TWO PLACE DECIMAL ±						
		THREE PLACE DECIMAL ±	Q.A.					
		INTERPRET GEOMETRIC TOLERANCING PER:	COMMENTS:			SIZE	DWG. NO.	REV
		MATERIAL				A	3542	
		FINISH				SCALE: 1:8	WEIGHT:	SHEET 1 OF 1
		DO NOT SCALE DRAWING						
		APPLICATION						

A

2

1