


Date : 30.01.2026

- Height of CWT frame (HGR) : **3200 mm** , instead of the standard height in the COS.

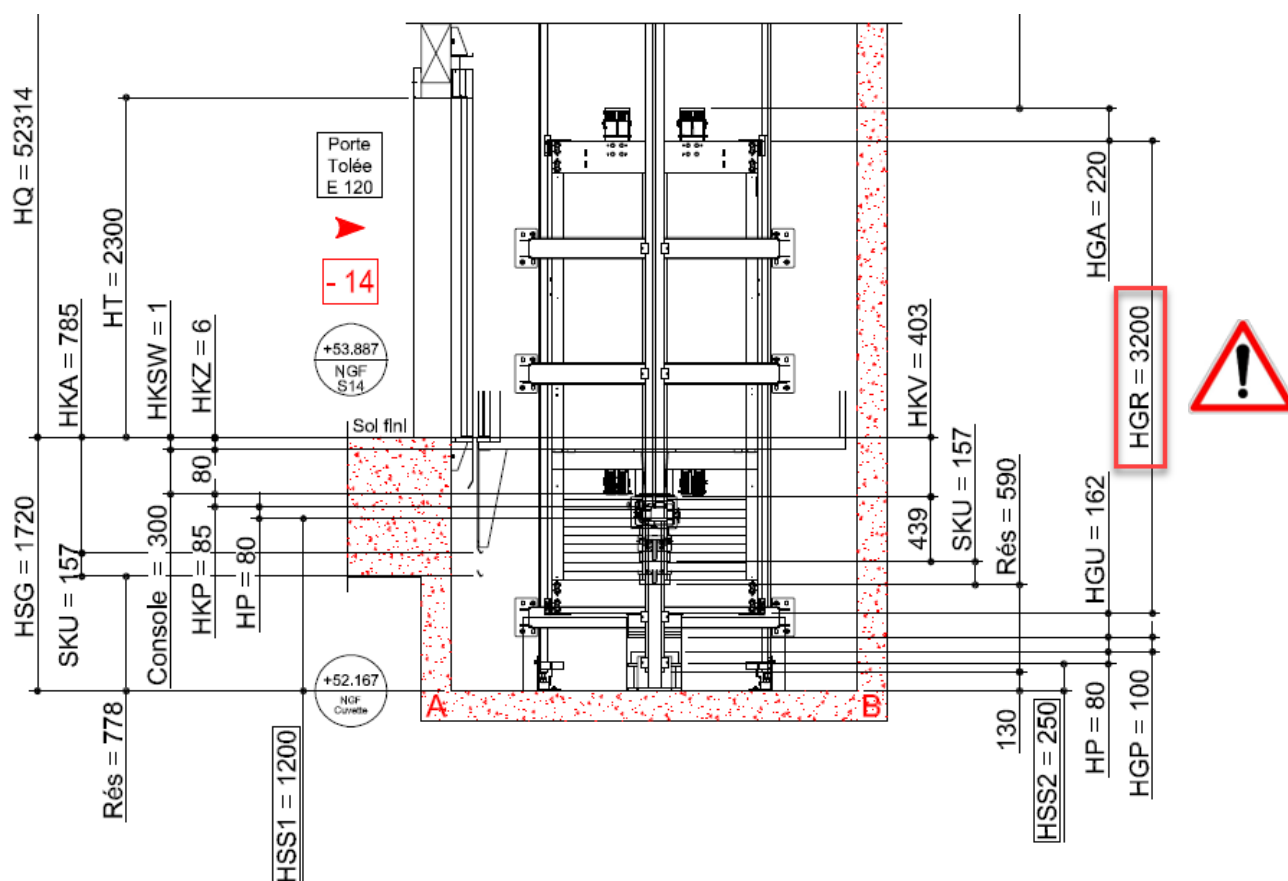

Modification	Ae 0	Ae 1	Ae 2	Ae 3	Ae 4	Ae 5	Ae 6		Préparé	2026-01-30	NOURI .M		
Document	SGP								Création	2026-01-30	NOURI.M		
Date	2026-01-30								Modifié	2026-01-30	NOURI.M		
									Libéré	2026-01-30	MNI		
SPECIFIC COUNTERWEIGHT FRAME SOCIETE DU GRAND PARIS (SGP) - (Type OA)								Remarque					
								Remplace / Mod. xxxxx xxxxx		 Schindler		No Pg.	Format A4
SCHINDLER PAR (FRANCE) - DTN / MDC NW					Classification	Responsable MDC/NW	CJ 59001033			Page 1	Lang. FR		

System / Elevator: SGP – OA
Available for/ Lift OA : **OA 0602 P**
Commission : PAR **11876296**

Project : SOCIETE DU GRAND PARIS

Page : 2

Please find the preparatory documents to assist you :

Article 59001033 COS Counterweight Frame
Date 05.02.2026

Guide Rail System Type	Guide rail system MM GRS 513
Counterweight Types	GGM43_51
Option: CWT safety gear	No
Type of STM	STM-PV40
Travel height HQ	52,785 m
No. of suspens. ropes/belts ZZ	4
Number of STM	4 /pce
Rated load GQ	1275 kg
Rated speed (VKN)	1,00 m/s
Width of counterweight (BG)	1.400 mm
Distance Guides CW BGS	1.444 mm
Category of compensating means	No
Type of CWT guide rail	T89/B
CWT guide shoe type	Guide Shoe I10
CWT buffer category	Polyurethane
Height of remov. CWT attachm.	150 mm
Height of CWT attachments HGU	162 mm
Hub width of pulley	62 mm
Pitch diameter of CWT pulley	150 mm
Reeving factor KZU	2
Buffer distance underneath cwt	200
Height of CWT frame (HGR)	3.300 mm
Depth of counterweight (TG)	190 mm
Traction sheave pitch diameter	112 mm
Dist.CWT to buffer/plinth HGP	100 mm
Counterweight buffer type	SA PS D2
No. of Buffers for CW ZPG	2
Width of guide rail head CWT	16,0 mm
Counterweight position	left wall;center
Counterweight zone	CWT SIDE
Counterweight location	On the left side
Seismic application	No
Height of CWT lower yoke	220 mm
Height of CWT upper yoke	220 mm
Type of machine	PML145
Opt: craneable packing	No
Component application	Counterweight
Category of CWT guide shoes	Sliding guide shoe
Safety gear imported from EU	No
Weight of counterweight GG	2.161 kg
Distance between the 4 STMs	80 mm
Opt: CWT frame cover	No
Coating of cwt pulleys	No
Tolerance range for HGP	-20mm/0mm
Dist. CWT center to wall SG	421 mm

HGR = 3200 mm

Confidential
Le présent document contient des informations confidentielles, dont la propriété appartient au groupe Schindler. Ni ce document, ni les informations contenues dans ce dernier ne doivent être divulguées à des tiers sans l'autorisation écrite de Schindler.
Confidential
This document contains confidential information that is proprietary to the Schindler Group. Neither this document nor the information contained therein shall be disclosed to third parties without written consent of Schindler France DTN/MD.

Confidential
This document contains confidential information that is proprietary to the Schindler Group. Neither this document nor the information contained therein shall be disclosed to third parties nor used for manufacturing without written consent of Schindler France DTN/MD.