
## CONNECTIONS CARTE AVANT

CANI / CANH

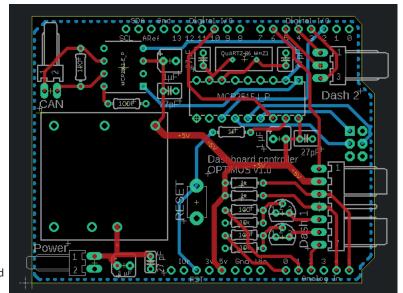


SDA - SPI SCL - SPI State switch Temp / Voltage

Neutral button state + 5V SCL - I2C SDA - I2C Launch LED Error shifting LED Homming button state

+ 12V Ground

## CONNECTIONS CARTE ARRIÈRE

Palettes gauche +5V Palette droite Gear Pot Shift Cut Ground +12 V

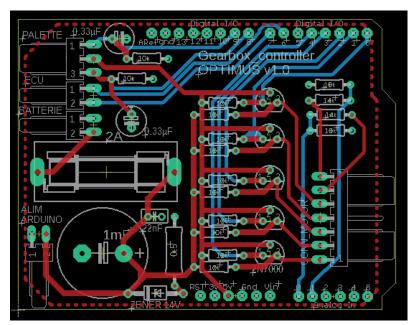

OUT 0 OUT 1 IN 0 IN 1 IN 2 IN 3 IN 4

iround

## **CONNECTIONS BSPD**

+12V Shutdown in Shutdown out Sens 1/pression frein Sens 2 / guillotine Ground

