

Event : AutoX & Endurance

Track :

Date :


## Font Axle

Dampers  
Compression

HS: 0 LS: 3

Rebound


HS: 0 LS: 3

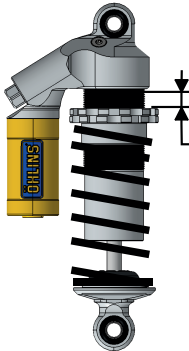

Preload  
15 mm

Spring stiffness  
175 kN/m

Anti-roll bar




Tyre pressure  
0.7 bar

Ground clearance  
98 mm

Camber

1.5 °

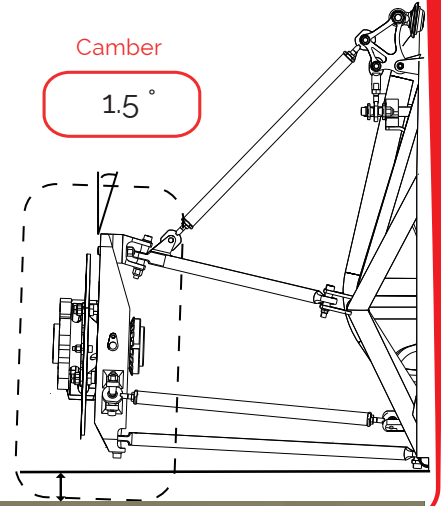


## Rear Axle

Dampers  
Compression

HS: 0 LS: 3

Rebound


HS: 0 LS: 3

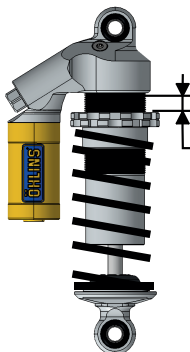

Preload  
15 mm

Spring stiffness  
250 kN/m

Anti-roll bar




Tyre pressure  
0.7 bar

Ground clearance  
112 mm

Camber

1.5 °

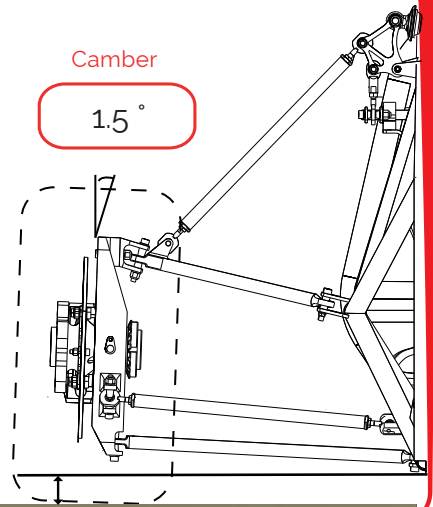


## Front /rear axle

Front toe

0 °

Rear Toe

-1.5 °

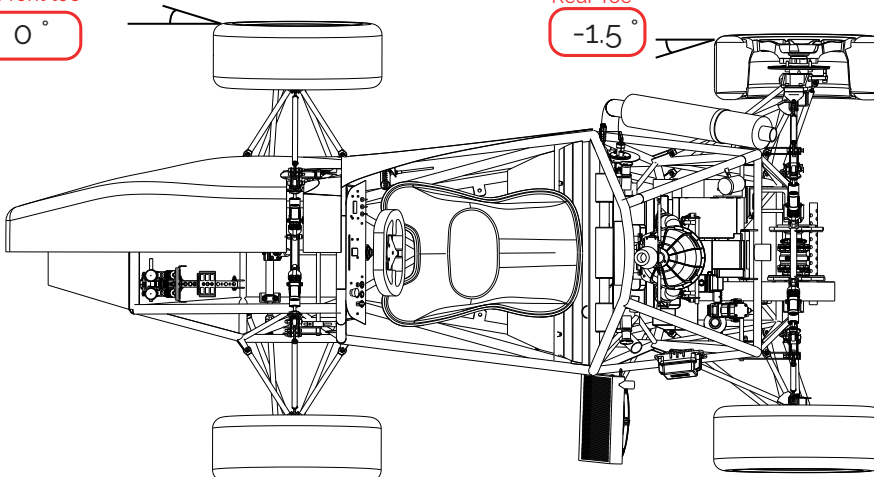

Differntiel Preload