Event : Acceleration

Track :

Date :

Font Axle

Anti-roll bar

Camber
1.5 °

Dampers Compression
HS : 0   LS : 0

Rebound
HS : 0   LS : 10
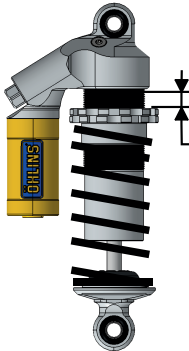
Preload
19 mm

Spring stifness
175 kN/m

Tyre pressure
2 bar

Ground clearance
109 mm

Rear Axle
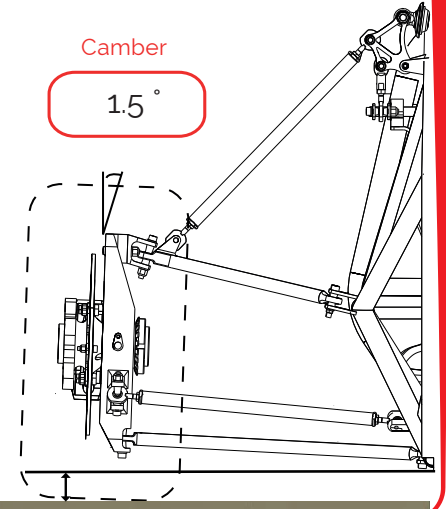
Anti-roll bar
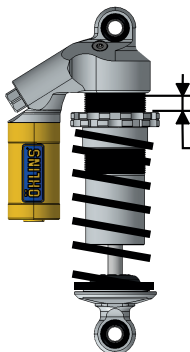
Camber
0 °

Dampers Compression
HS : 0   LS : 10

Rebound
HS : 0   LS : 0

Preload
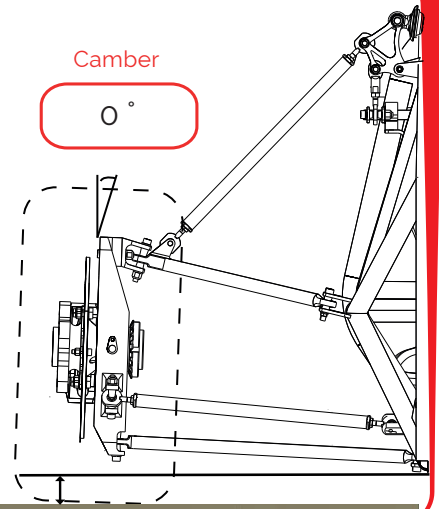15 mm

Spring stifness
250 kN/m
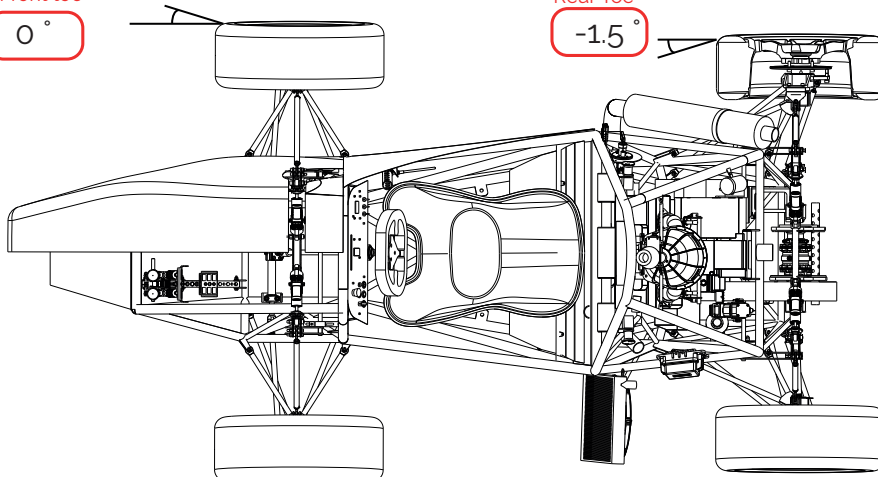
Tyre pressure
0.5 bar

Ground clearance
112 mm

Front /rear axle

Front toe
0 °

Rear Toe
-1.5 °

Differentiel Preload