

Event : Skidpad

Track :

Date :


Font Axle

Dampers
Compression

HS: 0 LS: 0

Rebound


HS: 0 LS: 0

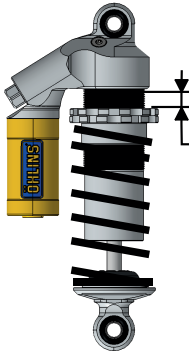

Preload
15 mm

Spring stiffness
175 kN/m

Anti-roll bar




Tyre pressure
0.6 bar

Ground clearance
98 mm

Camber

1.5 °

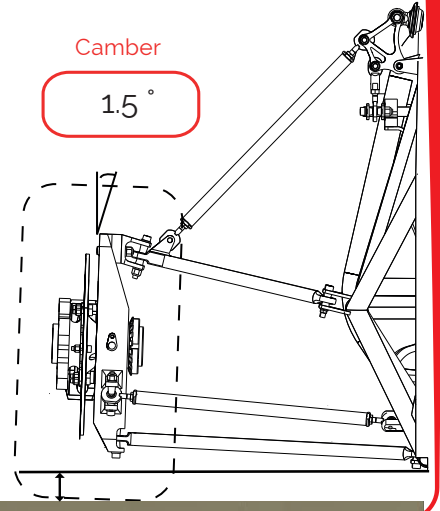


Rear Axle

Dampers
Compression

HS: 0 LS: 0

Rebound


HS: 0 LS: 0

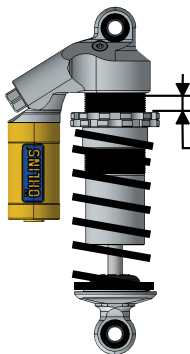

Preload
15 mm

Spring stiffness
250 kN/m

Anti-roll bar




Tyre pressure
0.7 bar

Ground clearance
112 mm

Camber

1.5 °

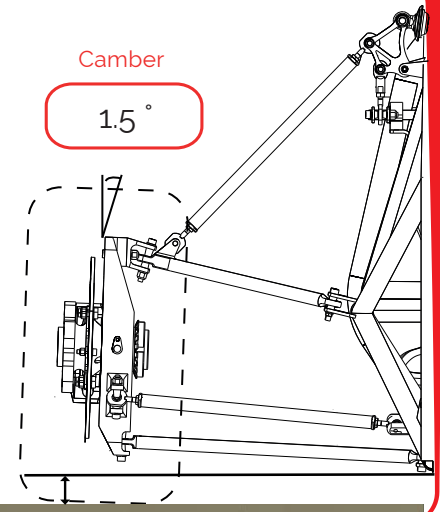


Front /rear axle

Front toe

0 °

Rear Toe

-1.5 °

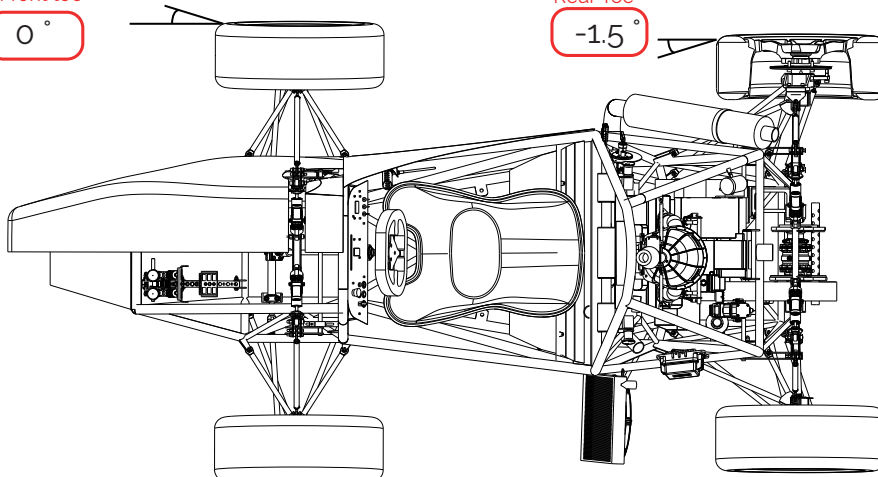

Differentiel Preload