



1. Description

1.1. Project

Project Name	test-usb
Board Name	NUCLEO-H753ZI
Generated with:	STM32CubeMX 6.15.0
Date	03/12/2026


1.2. MCU

MCU Series	STM32H7
MCU Line	STM32H743/753
MCU name	STM32H753ZITx
MCU Package	LQFP144
MCU Pin number	144

1.3. Core(s) information

Core(s)	ARM Cortex-M7
---------	---------------

2. Pinout Configuration

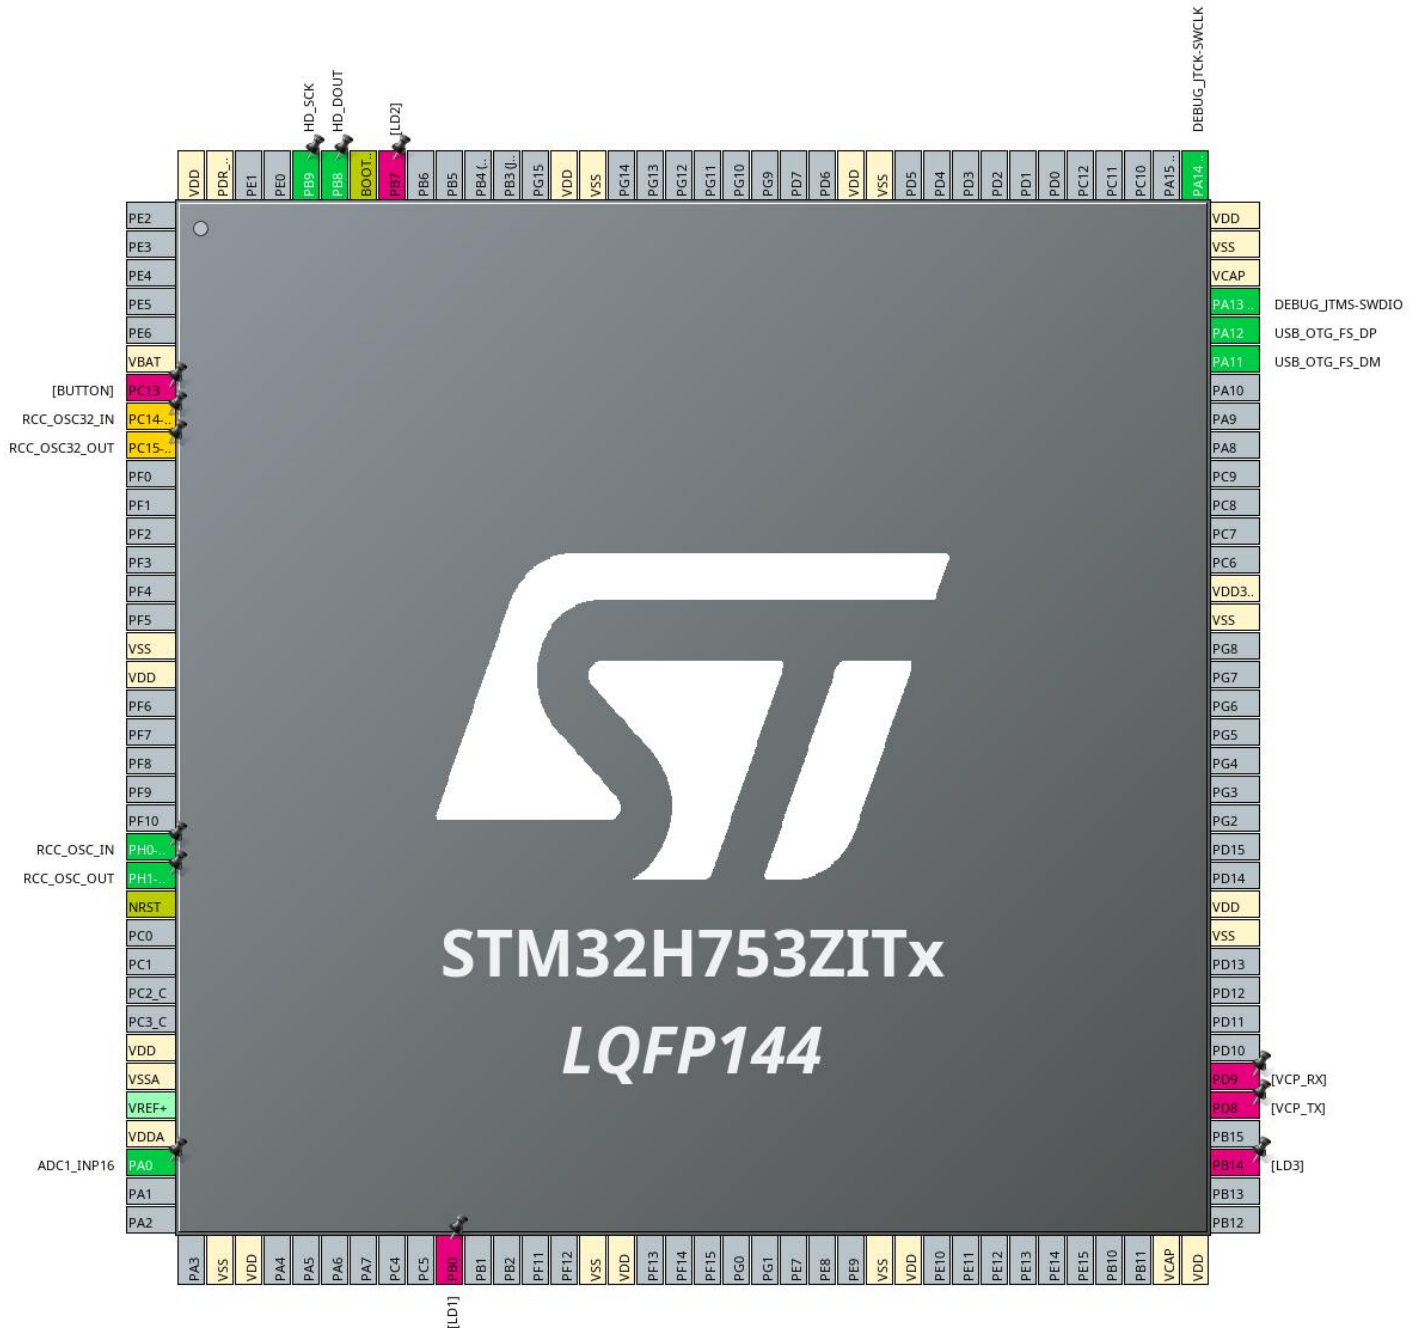

3. Pins Configuration


Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
7	PC13	I/O		
8	PC14-OSC32_IN (OSC32_IN) *	I/O	RCC_OSC32_IN	
9	PC15-OSC32_OUT (OSC32_OUT) *	I/O	RCC_OSC32_OUT	
16	VSS	Power		
17	VDD	Power		
23	PH0-OSC_IN (PH0)	I/O	RCC_OSC_IN	
24	PH1-OSC_OUT (PH1)	I/O	RCC_OSC_OUT	
25	NRST	Reset		
30	VDD	Power		
31	VSSA	Power		
33	VDDA	Power		
34	PA0	I/O	ADC1_INP16	
38	VSS	Power		
39	VDD	Power		
46	PB0	I/O		
51	VSS	Power		
52	VDD	Power		
61	VSS	Power		
62	VDD	Power		
71	VCAP	Power		
72	VDD	Power		
75	PB14	I/O		
77	PD8	I/O		
78	PD9	I/O		
83	VSS	Power		
84	VDD	Power		
94	VSS	Power		
95	VDD33_USB	Power		
103	PA11	I/O	USB_OTG_FS_DM	
104	PA12	I/O	USB_OTG_FS_DP	
105	PA13 (JTMS/SWDIO)	I/O	DEBUG_JTMS-SWDIO	
106	VCAP	Power		
107	VSS	Power		

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
108	VDD	Power		
109	PA14 (JTCK/SWCLK)	I/O	DEBUG_JTCK-SWCLK	
120	VSS	Power		
121	VDD	Power		
130	VSS	Power		
131	VDD	Power		
137	PB7	I/O		
138	BOOT0	Boot		
139	PB8 **	I/O	GPIO_Input	HD_DOUT
140	PB9 **	I/O	GPIO_Output	HD_SCK
143	PDR_ON	Power		
144	VDD	Power		

** The pin is affected with an I/O function

* The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

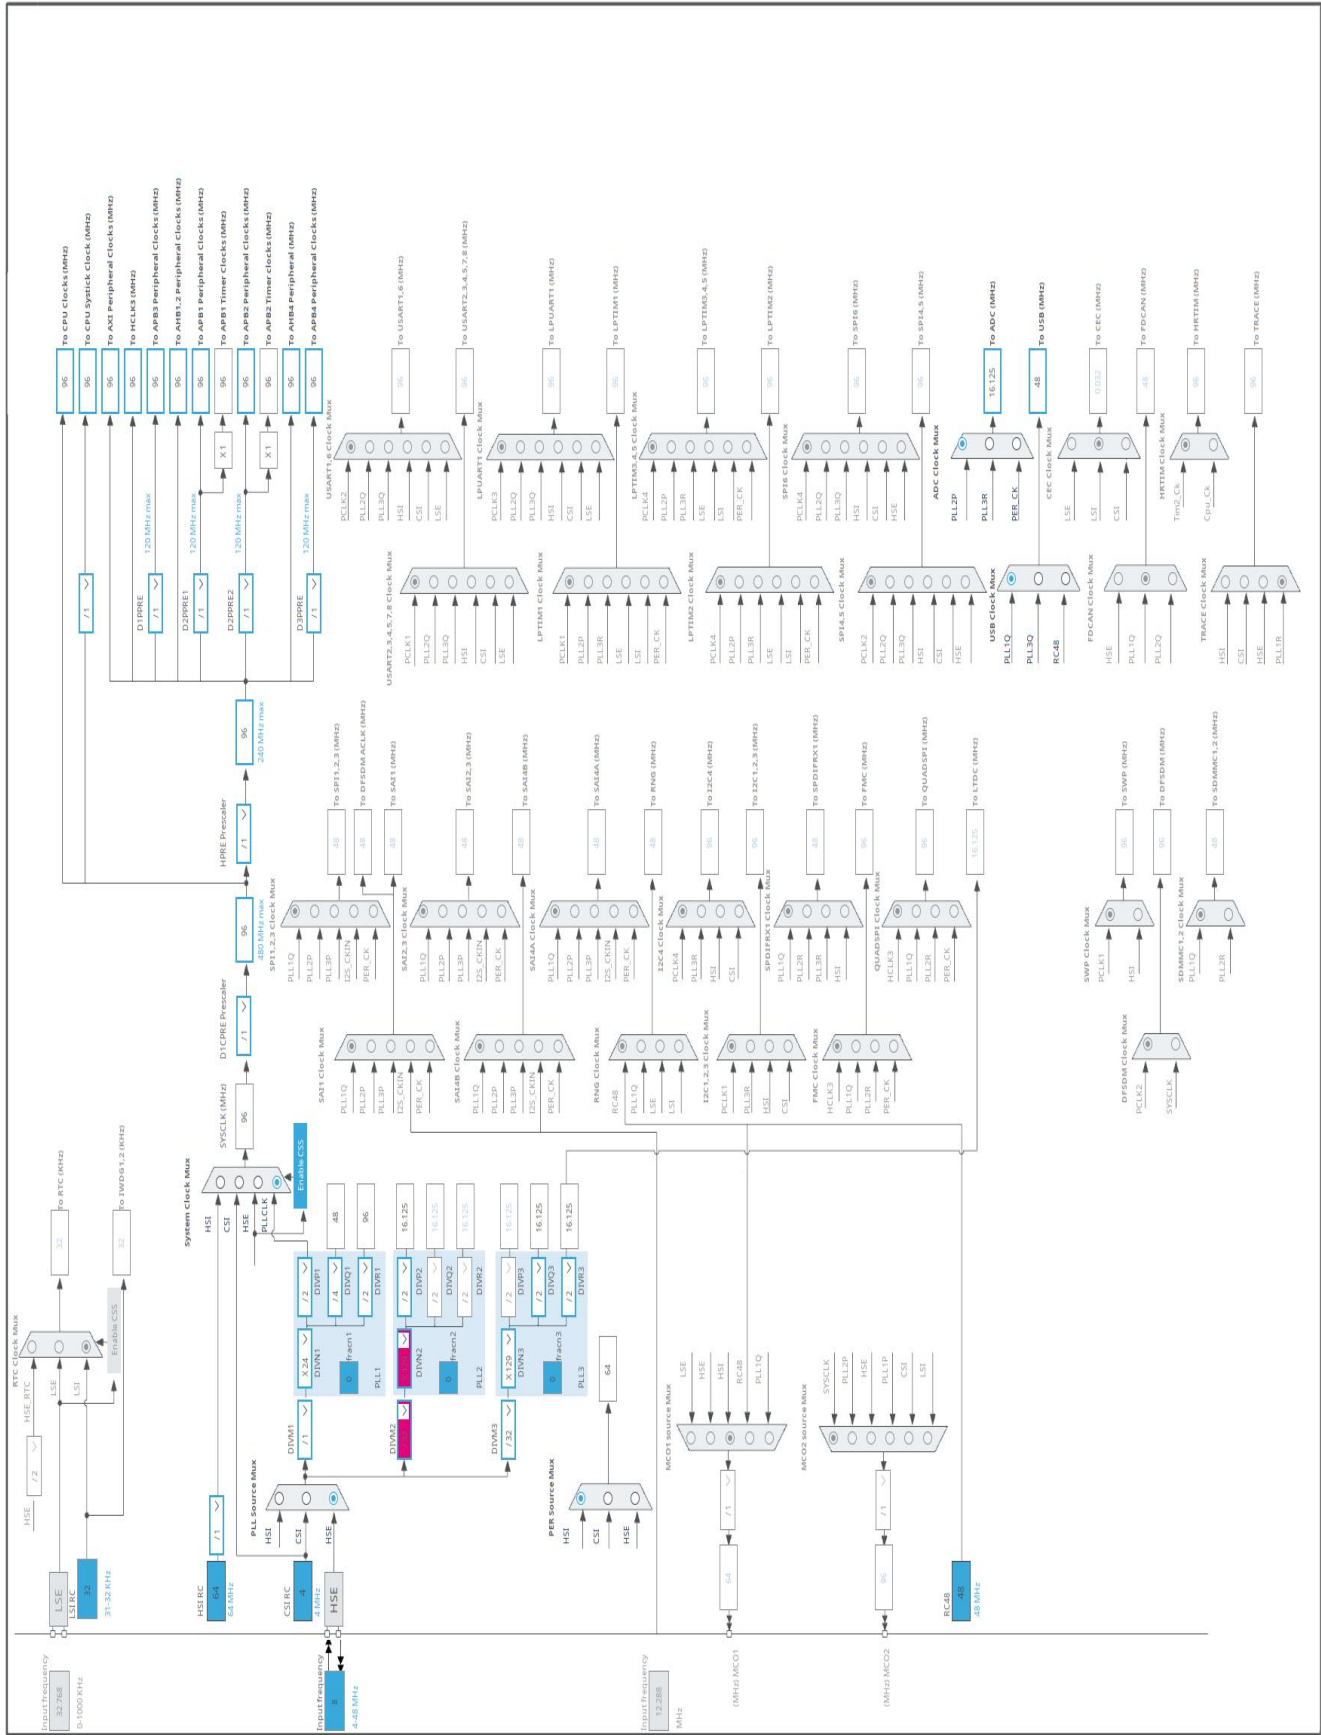

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32H7
Line	STM32H743/753
MCU	STM32H753ZITx
Datasheet	DS12117 Rev7

1.2. Parameter Selection

Temperature	25
Vdd	3.0

1.3. Battery Selection

Battery	Alkaline(9V)
Capacity	625.0 mAh
Self Discharge	0.3 %/month
Nominal Voltage	9.0 V
Max Cont Current	200.0 mA
Max Pulse Current	0.0 mA
Cells in series	1
Cells in parallel	1


1.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	3.0	3.0
Voltage Source	Battery	Battery
Range	VOS0: Scale0-High	SVOS5: System-Scale5
D1 Mode	DRUN/CRUN	DSTANDBY
D2 Mode	DRUN	DSTANDBY
D3 Mode	DRUN	DSTOP
Fetch Type	ITCM	NA
CPU Frequency	480 MHz	0 Hz
Clock Configuration	HSE BYP PLL	Flash-OFF
Clock Source Frequency	24 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	148 mA	150 μ A
Duration	0.1 ms	0.9 ms
DMIPS	1027.0	0.0
Ta Max	105.46	124.98
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	14.94 mA
Battery Life	1 day, 17 hours	Average DMIPS	1027.2001 DMIPS

1.6. Chart

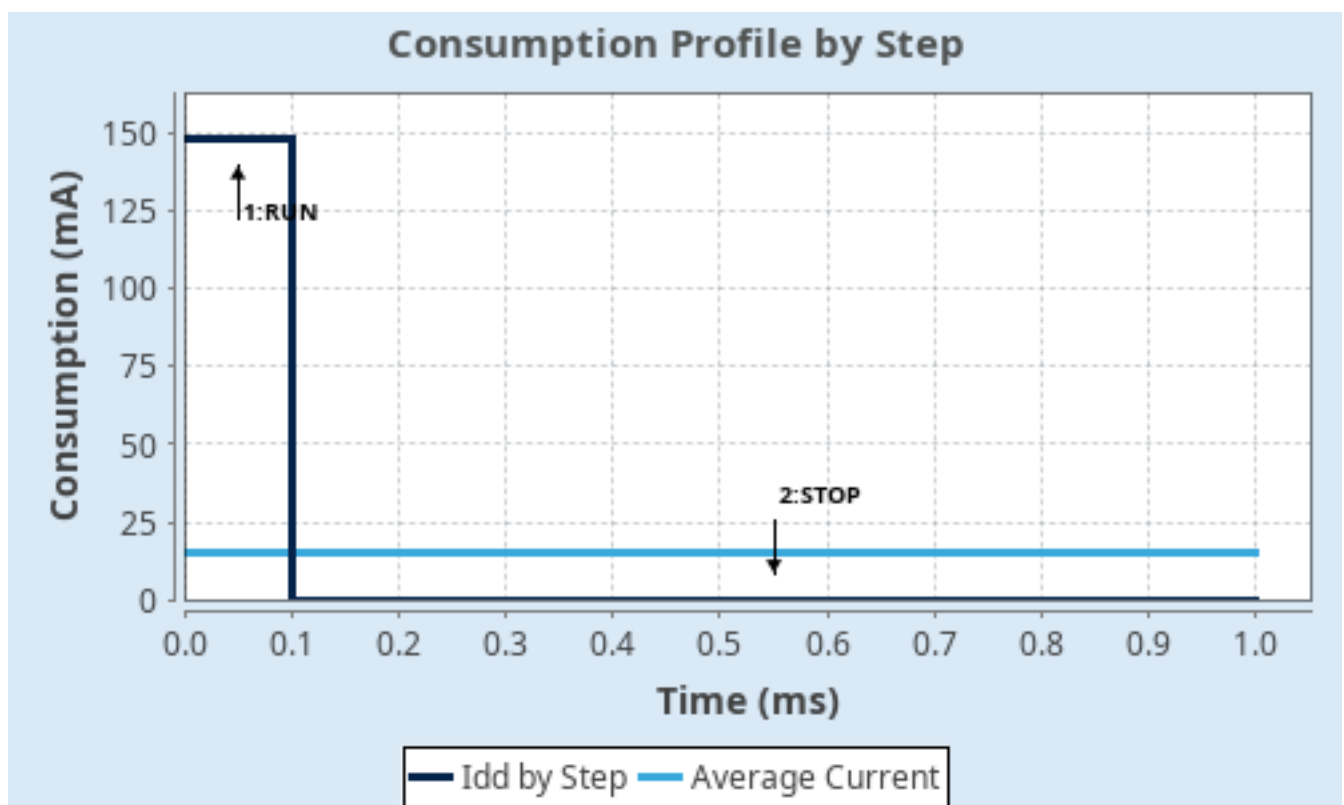

2. Software Project

2.1. Project Settings

Name	Value
Project Name	test-usb
Project Folder	/home/loic-finette/Documents/Avionics_SW/2026/USB/test-usb
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_H7 V1.12.1
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

2.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

2.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_USB_DEVICE_Init	USB_DEVICE
4	MX_ADC1_Init	ADC1

3. Peripherals and Middlewares Configuration

3.1. ADC1

IN16: IN16 Single-ended

3.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode Independent mode

ADC_Settings:

Clock Prescaler Asynchronous clock mode divided by 1

Resolution

ADC 12-bit resolution *

Scan Conversion Mode Disabled

Continuous Conversion Mode Disabled

Discontinuous Conversion Mode Disabled

End Of Conversion Selection End of single conversion

Overrun behaviour Overrun data preserved

Left Bit Shift No bit shift

Conversion Data Management Mode Regular Conversion data stored in DR register only

Low Power Auto Wait Disabled

ADC_Regular_ConversionMode:

Enable Regular Conversions Enable

Enable Regular Oversampling Disable

Oversampling Ratio 1

Number Of Conversion 1

External Trigger Conversion Source Regular Conversion launched by software

External Trigger Conversion Edge None

Rank 1

Channel Channel 16

Sampling Time 1.5 Cycles

Offset Number No offset

ADC_Injected_ConversionMode:

Enable Injected Conversions Disable

Analog Watchdog 1:

Enable Analog WatchDog1 Mode false

Analog Watchdog 2:

Enable Analog WatchDog2 Mode false

Analog Watchdog 3:

Enable Analog WatchDog3 Mode false

3.2. DEBUG

Debug: Serial Wire

3.3. MEMORYMAP

mode: Activated

3.4. NUCLEO-H753ZI

mode: Human Machine Interface

3.4.1. Human Machine Interface:

Led:

USER LED GREEN (LD1)	true *
USER LED BLUE (LD2)	true *
USER LED RED (LD3)	true *

Button:

USER BUTTON	Mode EXTI *
-------------	-------------

VCOM:

Virtual Com Port	true *
------------------	--------

Demonstration code:

Generate demonstration code	Disabled
-----------------------------	----------

3.5. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

3.5.1. Parameter Settings:

Power Parameters:

SupplySource	PWR_LDO_SUPPLY
Power Regulator Voltage Scale	Power Regulator Voltage Scale 3

RCC Parameters:

TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000
CSI Calibration Value	32
HSI Calibration Value	64

System Parameters:

VDD voltage (V)	3.3
Flash Latency(WS)	2 WS (3 CPU cycle)
Product revision	rev.V

PLL range Parameters:

PLL1 clock Input range	Between 8 and 16 MHz
PLL2 input frequency range	Between 8 and 16 MHz
PLL1 clock Output range	Wide VCO range
PLL2 clock Output range	Wide VCO range

3.6. SYS

Timebase Source: TIM1

3.7. USB_OTG_FS

Mode: Device_Only

3.7.1. Parameter Settings:

Speed	Full Speed 12MBit/s
Enable internal IP DMA	Disabled
Low power	Disabled
Battery charging	Disabled
Link Power Management	Disabled
Use dedicated end point 1 interrupt	Disabled
VBUS sensing	Disabled
Signal start of frame	Disabled

3.8. FREERTOS

Interface: CMSIS_V2

3.8.1. Config parameters:

API:

FreeRTOS API	CMSIS v2
--------------	----------

Versions:

FreeRTOS version	10.3.1
CMSIS-RTOS version	2.00

MPU/FPU:

ENABLE_MPU	Disabled
ENABLE_FPU	Disabled

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	56
MINIMAL_STACK_SIZE	128
MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Enabled
USE_COUNTING_SEMAPHORES	Enabled
QUEUE_REGISTRY_SIZE	8
USE_APPLICATION_TASK_TAG	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Disabled
USE_TICKLESS_IDLE	Disabled
USE_TASK_NOTIFICATIONS	Enabled
RECORD_STACK_HIGH_ADDRESS	Disabled

Memory management settings:

Memory Allocation	Dynamic / Static
TOTAL_HEAP_SIZE	15360
Memory Management scheme	heap_4

Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Disabled
USE_DAEMON_TASK_STARTUP_HOOK	Disabled
CHECK_FOR_STACK_OVERFLOW	Disabled

Run time and task stats gathering related definitions:

GENERATE_RUN_TIME_STATS	Disabled
USE_TRACE_FACILITY	Enabled
USE_STATS_FORMATTING_FUNCTIONS	Disabled

Co-routine related definitions:

USE_CO_ROUTINES	Disabled
MAX_CO_ROUTINE_PRIORITIES	2

Software timer definitions:

USE_TIMERS	Enabled
TIMER_TASK_PRIORITY	2
TIMER_QUEUE_LENGTH	10
TIMER_TASK_STACK_DEPTH	256

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY 15
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY 5

Added with 10.2.1 support:

MESSAGE_BUFFER_LENGTH_TYPE size_t
USE_POSIX_ERRNO Disabled

CMSIS-RTOS V2 flags:

USE_OS2_THREAD_SUSPEND_RESUME Enabled
USE_OS2_THREAD_ENUMERATE Enabled
USE_OS2_EVENTFLAGS_FROM_ISR Enabled
USE_OS2_THREAD_FLAGS Enabled
USE_OS2_TIMER Enabled
USE_OS2_MUTEX Enabled

3.8.2. Include parameters:

Include definitions:

vTaskPrioritySet Enabled
uxTaskPriorityGet Enabled
vTaskDelete Enabled
vTaskCleanUpResources Disabled
vTaskSuspend Enabled
vTaskDelayUntil Enabled
vTaskDelay Enabled
xTaskGetSchedulerState Enabled
xTaskResumeFromISR Enabled
xQueueGetMutexHolder Enabled
xSemaphoreGetMutexHolder Disabled
pcTaskGetTaskName Disabled
uxTaskGetStackHighWaterMark Enabled
xTaskGetCurrentTaskHandle Enabled
eTaskGetState Enabled
xEventGroupSetBitFromISR Disabled
xTimerPendFunctionCall Enabled
xTaskAbortDelay Disabled
xTaskGetHandle Disabled
uxTaskGetStackHighWaterMark2 Disabled

3.8.3. Advanced settings:

Newlib settings (see parameter description first):

USE_NEWLIB_REENTRANT Enabled *

Project settings (see parameter description first):

Use FW pack heap file

Enabled

3.9. USB_DEVICE

Class For FS IP: Communication Device Class (Virtual Port Com)

3.9.1. Parameter Settings:

Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)

1

USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)

1

USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)

512

USBD_SELF_POWERED (Enabled self power)

Enabled

USBD_DEBUG_LEVEL (USBD Debug Level)

0: No debug message

USBD_LPM_ENABLED (Link Power Management)

1: Link Power Management supported

Class Parameters:

USB CDC Rx Buffer Size

2048

USB CDC Tx Buffer Size

2048

3.9.2. Device Descriptor:

Device Descriptor:

VID (Vendor IDentifier)

1155

LANGID_STRING (Language Identifier)

English(United States)

MANUFACTURER_STRING (Manufacturer Identifier)

STMicroelectronics

Device Descriptor FS:

PID (Product IDentifier)

22336

PRODUCT_STRING (Product Identifier)

STM32 Virtual Port *

CONFIGURATION STRING (Configuration Identifier)

CDC Config

INTERFACE STRING (Interface Identifier)

CDC Interface

*** User modified value**

4. System Configuration

4.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA0	ADC1_INP16	Analog mode	No pull-up and no pull-down	n/a	
DEBUG	PA13 (JTMS/SWDIO)	DEBUG_JTMS-SWDIO	n/a	n/a	n/a	
	PA14 (JTCK/SWCLK)	DEBUG_JTCK-SWCLK	n/a	n/a	n/a	
RCC	PH0-OSC_IN (PH0)	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT (PH1)	RCC_OSC_OUT	n/a	n/a	n/a	
USB_OTG_FS	PA11	USB_OTG_FS_DM	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PA12	USB_OTG_FS_DP	Alternate Function Push Pull	No pull-up and no pull-down	Low	
Single Mapped Signals	PC14-OSC32_IN (OSC32_IN)	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
GPIO	PB8	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	HD_DOUT
	PB9	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	HD_SCK

4.2. DMA configuration

nothing configured in DMA service

4.3. BDMA configuration

nothing configured in DMA service

4.4. MDMA configuration

nothing configured in DMA service

4.5. NVIC configuration

4.5.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	15	0
System tick timer	true	15	0
TIM1 update interrupt	true	15	0
EXTI line[15:10] interrupts	true	5	0
USB On The Go FS global interrupt	true	5	0
PVD and AVD interrupts through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1 and ADC2 global interrupts	unused		
FPU global interrupt	unused		
USB On The Go FS End Point 1 Out global interrupt	unused		
USB On The Go FS End Point 1 In global interrupt	unused		
HSEM1 global interrupt	unused		

4.5.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	false	false
Debug monitor	false	true	false
Pendable request for system service	false	false	false
System tick timer	false	false	true
TIM1 update interrupt	false	true	true
EXTI line[15:10] interrupts	false	true	true

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
USB On The Go FS global interrupt	false	true	true

*** User modified value**

5. System Views

5.1. Category view

5.1.1. Current

Category view

Power Domain view

Choose filters ...

... by Power Domain

☐ D1

☐ D2

☐ D3

☒ None

Middleware

FREERTOS

USB_DEVICE

System Core	Analog	Timers	Connectivity	Multimedia	Security	Computing	Trace and Debug	Power and Thermal	Bsp	Other
BDMA	ADC1		USB_FS				DEBUG		NUCLEO-H753ZI	
CORTEX_M7										
DMA										
GPIO										
MDMA										
NVIC										
RCC										
SYS										

5.1.2. Without filters

Category view

Power Domain view

Choose filters ...

... by Power Domain

D1

D2

D3

None


Middleware

FREERTOS

USB_DEVICE

System Core	Analog	Timers	Connectivity	Multimedia	Security	Computing	Trace and Debug	Power and Thermal	Bsp	Other
BDMA	ADC1		USB_FS				DEBUG		NUCLEO-H753ZI	
CORTEX_M7										
DMA										
GPIO										
MDMA										
NVIC										
RCC										
SYS										

5.2. Power Domain view

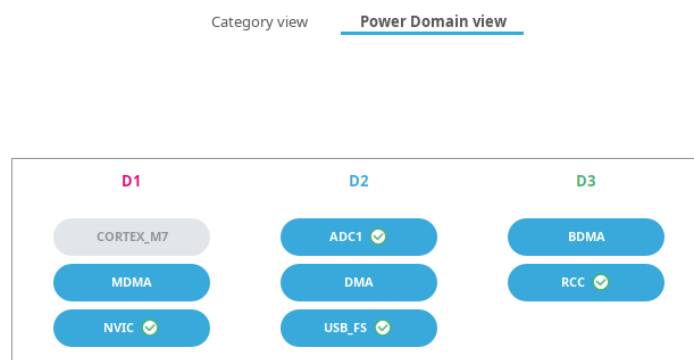

6. Docs & Resources

Type	Link
BSDL files	https://www.st.com/resource/en/bsdl_model/stm32h7_bsd1.zip
IBIS models	https://www.st.com/resource/en/ibis_model/stm32h7_ibis.zip
System View Description	https://www.st.com/resource/en/svd/stm32h7-svd.zip
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers_stm32h7_series_product_overview.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_embedded_software_solutions.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_eval-tools_portfolio.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_stm8_functional-safety-packages.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_software_development_tools.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32-family-overview.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32h7rs-lines-overview.pdf
Brochures	https://www.st.com/resource/en/brochure/brstm32h7.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32nucleo.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32trust.pdf
Flyers	https://www.st.com/resource/en/flyer/flpowerstbd.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32h7rs.pdf
Security Bulletin	https://www.st.com/resource/en/technical_note/tn1489-security-bulletin-tn1489stpsirt-physical-attacks-on-stm32-and-stm32cube-firmware-stmicroelectronics.pdf
Security Bulletin	https://www.st.com/resource/en/security_bulletin/sb0023-eucleak-protection-statement-for-stmicroelectronics-certified-products-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an1709-emc-design-guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2606-stm32-microcontroller-system-memory-boot-mode-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3126-audio-and-waveform-generation-using-the-dac-in-stm32-products-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3155-uart-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3156-usb-dfu-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4221-i2c-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4286-spi-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4539-hrtim-cookbook-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4776-generalpurpose-timer-cookbook-for-stm32-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4839-level-1-cache-on-stm32f7-series-and-stm32h7-series-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4891-stm32h72x-stm32h73x-and-singlecore-stm32h74x75x-system-architecture-and-performance-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4936-migration-of-

microcontroller-applications-from-stm32f7-series-to-stm32h743753-line-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4989-stm32-microcontroller-debug-toolbox-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4990-getting-started-with-sigmadelta-digital-interface-on-applicable-stm32-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5033-stm32cube-mcu-package-examples-for-stm32h7-series-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5073-receiving-spdif-audio-stream-with-the-stm32f4f7h7-series-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5312-migration-from-revy-to-revv-for-stm32h743753-and-stm32h750-value-line-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5354-getting-started-with-the-stm32h7-series-mcu-16bit-adc-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4760-quadspi-interface-on-stm32-microcontrollers-and-microprocessors-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4899-stm32-microcontroller-gpio-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5293-migration-guide-from-stm32f7-series-to-stmh74x75x-stm32h72x73x-and-stmh7a37bx-devices-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4991-how-to-wake-up-an-stm32-microcontroller-from-lowpower-mode-with-the-usart-or-the-lpuart-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4838-introduction-to

memory-protection-unit-management-on-stm32-mcus-
stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5927-i3c-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4879-introduction-to-usb-hardware-and-pcb-guidelines-using-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5225-introduction-to-usb-typec-power-delivery-for-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5342-how-to-use-error-correction-code-ecc-management-for-internal-memories-protection-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4938-getting-started-with-stm32h74xig-and-stm32h75xig-mcu-hardware-development-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5537-how-to-use-adc-oversampling-techniques-to-improve-signal-to-noise-ratio-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5036-guidelines-for-thermal-management-on-stm32-applications-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4992-introduction-to-secure-firmware-install-sfi-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5405-how-to-use-fdcan-bootloader-protocol-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5690-how-to-use-vrefbuf-peripheral-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4230-introduction-to-random-number-generation-validation-using-the-nist-statistical-test-suite-for-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2867-guidelines-for-oscillator-design-on-stm8afals-and-stm32-mcus-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4013-introduction-to-timers-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4277-how-to-use-pwm-shutdown-for-motor-control-and-digital-power-conversion-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4635-how-to-optimize-lpuart-power-consumption-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4759-introduction-to-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-with-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4861-introduction-to-lcdtft-display-controller-ltcd-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4908-getting-started-with-usart-automatic-baud-rater-detection-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4943-how-to-use-chromart-accelerator-to-refresh-an-lcdtft-display-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5156-introduction-to-security-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5200-getting-started-with-stm32h7-mcus-sdmmc-host-controller-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5224-introduction-to-dmamax-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5507-how-to-use-crc-to-check-the-integrity-of-the-internal-flash-memory-on-stm32h7-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5543-guidelines-for-enhanced-spi-communication-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5337-guidelines-for-estimating-stm32h7-mcus-lifetime-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4996-how-to-use-the-jpeg-codec-peripheral-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5348-introduction-to-fdcan-peripherals-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/cd00211314-how-to-optimize-the-adc-accuracy-in-the-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2639-soldering-recommendations-and-package-information-for-leadfree-ecopack2-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5020-introduction-to-digital-camera-interface-dcml-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4566-how-to-extend-the-dac-performance-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4323-getting-started-for-related-Tools-with-stemwin-library-stmicroelectronics.pdf
& Software

Application Notes https://www.st.com/resource/en/application_note/an4435-guidelines-for-obtaining-ulcsaiec-607301603351-class-b-certification-in-any-stm32-application-stmicroelectronics.pdf
for related Tools & Software

Application Notes https://www.st.com/resource/en/application_note/an4657-stm32-inapplication-programming-iap-using-the-usart-stmicroelectronics.pdf
for related Tools & Software

Application Notes https://www.st.com/resource/en/application_note/an4841-digital-signal-processing-for-stm32-microcontrollers-using-cmsis-stmicroelectronics.pdf
for related Tools & Software

Application Notes https://www.st.com/resource/en/application_note/an4891-stm32h72x-stm32h73x-and-singlecore-stm32h74x75x-system-architecture-and-performance-stmicroelectronics.pdf
for related Tools & Software

Application Notes https://www.st.com/resource/en/application_note/an5001-stm32cube-expansion-package-for-stm32h7-series-mdma-stmicroelectronics.pdf
for related Tools & Software

Application Notes https://www.st.com/resource/en/application_note/an5014-stm32h7x3-smart-power-management-expansion-package-for-stm32cube-stmicroelectronics.pdf
for related Tools & Software

Application Notes for related Tools & Software https://www.st.com/resource/en/application_note/an5033-stm32cube-mcu-package-examples-for-stm32h7-series-stmicroelectronics.pdf

Application Notes for related Tools & Software https://www.st.com/resource/en/application_note/an5056-integration-guide-for-the-xcubesbsfu-stm32cube-expansion-package-stmicroelectronics.pdf

Application Notes for related Tools & Software https://www.st.com/resource/en/application_note/an5360-getting-started-with-projects-based-on-the-stm32mp1-series-in-stm32cubeide-stmicroelectronics.pdf

Application Notes for related Tools & Software https://www.st.com/resource/en/application_note/an5361-getting-started-with-projects-based-on-dualcore-stm32h7-microcontrollers-in-stm32cubeide-stmicroelectronics.pdf

Application Notes for related Tools & Software https://www.st.com/resource/en/application_note/an5394-getting-started-with-projects-based-on-the-stm32l5-series-in-stm32cubeide-stmicroelectronics.pdf

Application Notes for related Tools & Software https://www.st.com/resource/en/application_note/an5418-how-to-build-a-simple-usbp-d-sink-application-with-stm32cubemx-stmicroelectronics.pdf

Application Notes for related Tools & Software https://www.st.com/resource/en/application_note/an5426-migrating-graphics-middleware-projects-from-stm32cubemx-540-to-stm32cubemx-550-stmicroelectronics.pdf

Application Notes for related Tools & Software https://www.st.com/resource/en/application_note/an5564-getting-started-with-projects-based-on-dualcore-stm32wl-microcontrollers-in-stm32cubeide-stmicroelectronics.pdf

Application Notes for related Tools & Software https://www.st.com/resource/en/application_note/an4865-lowpower-timer-lptim-applicative-use-cases-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes for related Tools & Software https://www.st.com/resource/en/application_note/an5698-adapting-the-xcubestl-functional-safety-package-for-stm32-iec-61508-compliant-to-other-safety-standards-stmicroelectronics.pdf

Application Notes for related Tools & Software https://www.st.com/resource/en/application_note/an5731-stm32cubemx-and-stm32cubeide-threadsafe-solution-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5450-stm32h7a37b3-

for related Tools & Software	lines-and-stm32h7b0-value-line-smart-power-management-expansion-package-for-stm32cube-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4502-stm32-smbuspm-bus-expansion-package-for-stm32cube-stmicroelectronics.pdf
for related Tools & Software	https://www.st.com/resource/en/application_note/an5952-how-to-use-cmake-in-stm32cubeide-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4635-how-to-optimize-lpuart-power-consumption-on-stm32-mcus-stmicroelectronics.pdf
for related Tools & Software	https://www.st.com/resource/en/application_note/an5054-how-to-perform-secure-programming-using-stm32cube-programmer-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an6088-how-to-use-mce-for-encryption-decryption-on-stm32-mcus-stmicroelectronics.pdf
for related Tools & Software	https://www.st.com/resource/en/application_note/an6179-how-to-integrate-the-stl-firmware-into-a-time-critical-user-application-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an6127-getting-started-with-stm32h7rx7sx-mcus-in-stm32cubeide-stmicroelectronics.pdf
for related Tools & Software	
Design Notes & Tips	https://www.st.com/resource/en/design_tip/dt0117-microphone-array-beamforming-in-the-pcm-and-pdm-domain-stmicroelectronics.pdf
Errata Sheets	https://www.st.com/resource/en/errata_sheet/es0392-stm32h742xig-stm32h743xig-stm32h750xb-stm32h753xi-device-errata-stmicroelectronics.pdf
Datasheet	https://www.st.com/resource/en/datasheet/dm00388325.pdf
Programming Manuals	https://www.st.com/resource/en/programming_manual/pm0253-stm32f7-series-and-stm32h7-series-cortexm7-processor-programming-manual-stmicroelectronics.pdf
Reference Manuals	https://www.st.com/resource/en/reference_manual/rm0433-stm32h742-stm32h743753-and-stm32h750-value-line-advanced-arm-based-32bit

	mcus-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1163-description-of-wlcsp-for-microcontrollers-and-recommendations-for-its-use-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-shipping-media-for-stm32-microcontrollers-in-bga-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1433-reference-device-marking-schematics-for-stm32-microcontrollers-and-microprocessors-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um2840-stm32h7-dualcore-series-safety-manual-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um2331-stm32h7-singlecore-series-safety-manual-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um3252-stm32h7-series-ulcsaiec-607301603351-selftest-library-user-guide-stmicroelectronics.pdf