

Equ to Tensility
30-00218
flexible 2mm O.D.
Four conductor
+ shield.
#32 AWG

BNC
Equ Amphenol 31-315

pins 1, 2
P2

pins 3, 4 w/ identifying
mark on
Cable or connector
P3

30 cm
± 10%

1 m
length
± 10%

Wire loop for
optional
shield connection


4 det housing
w/ ramp + rib
equ to
Molex
22-01-2045
to fit 0.1" header

molded
strain relief

Gold plated
pins required

PIN 1

Drawing not to scale

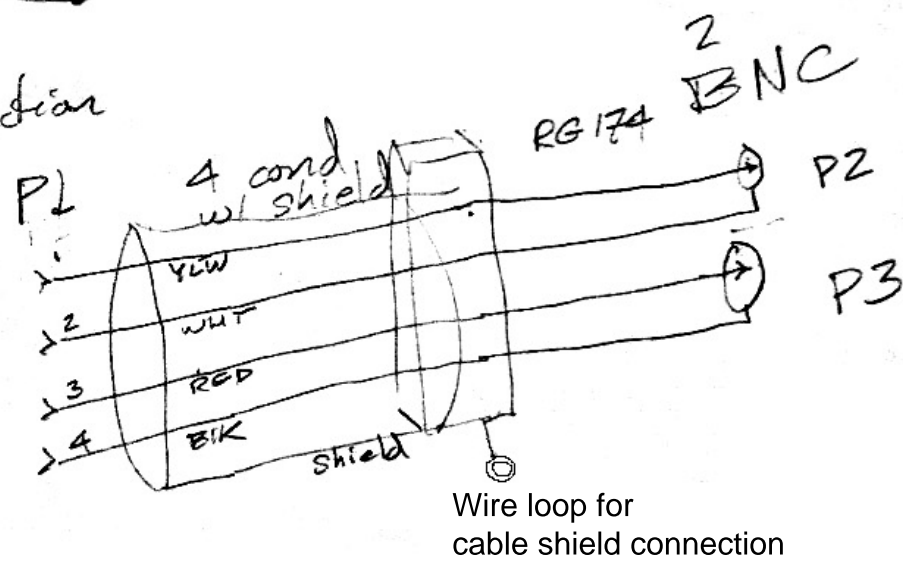

DPOAE Source Cable
ijs EPL 2016.08.18