
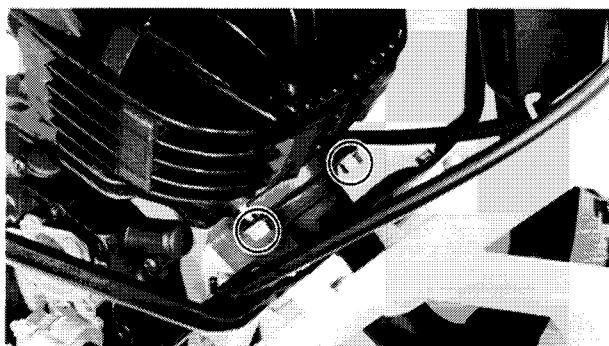
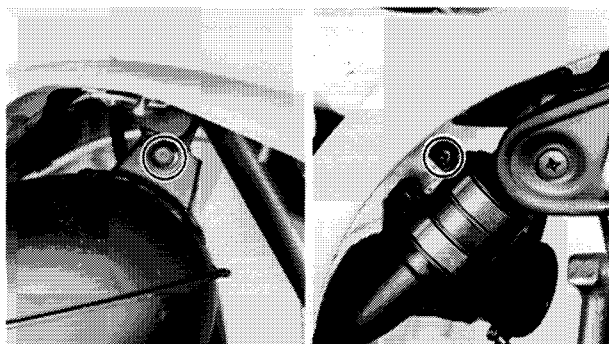


**EXHAUST PIPE**


1. Remove:
 - Exhaust pipe

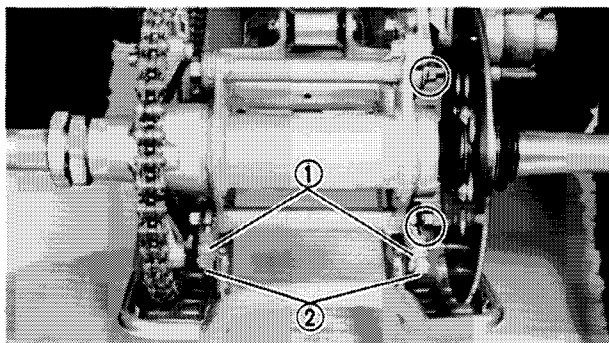


4

**DRIVE CHAIN**

1. Loosen:
 - Bolts (Rear axle hub)
 - Look nuts ①
 - Adjusters ②

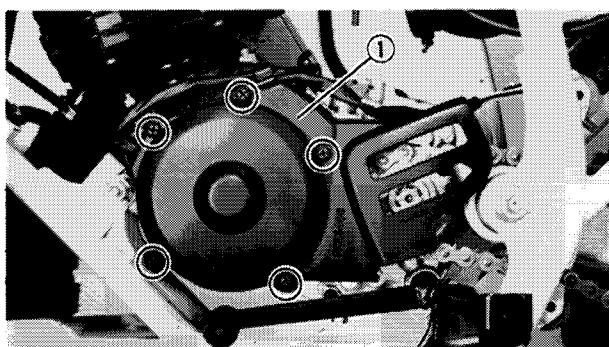

2. Remove:
 - Crankcase cover ① (Left)

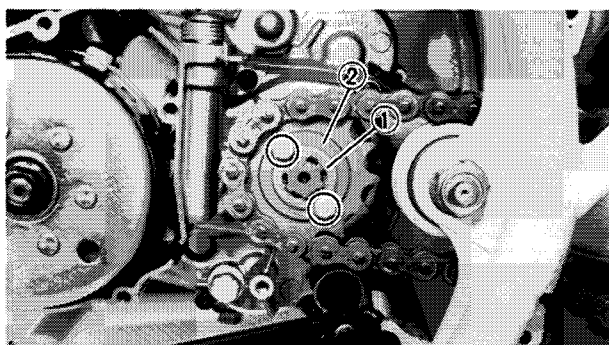

3. Remove:
 - Sprocket holder ①
 - Drive sprocket ②

NOTE:

Before removing the drive sprocket, increase the drive chain slack.