




- ① Front brake cable
- ② Clutch cable
- ③ Main switch lead
- ④ Fuel breather hose
- ⑤ Band
- ⑥ Fuel hose
- ⑦ Wire holder
- ⑧ Clamp
- ⑨ Oil hose

- ⑩ Carburetor overflow hose
- ⑪ Flywheel magneto lead
- A Route the clutch cable in front of the fender stay.
- B For installing the wireharness, align the positioning tape with the wire holder.
- C The leads should be clamped on the inward half of the frame pipe.

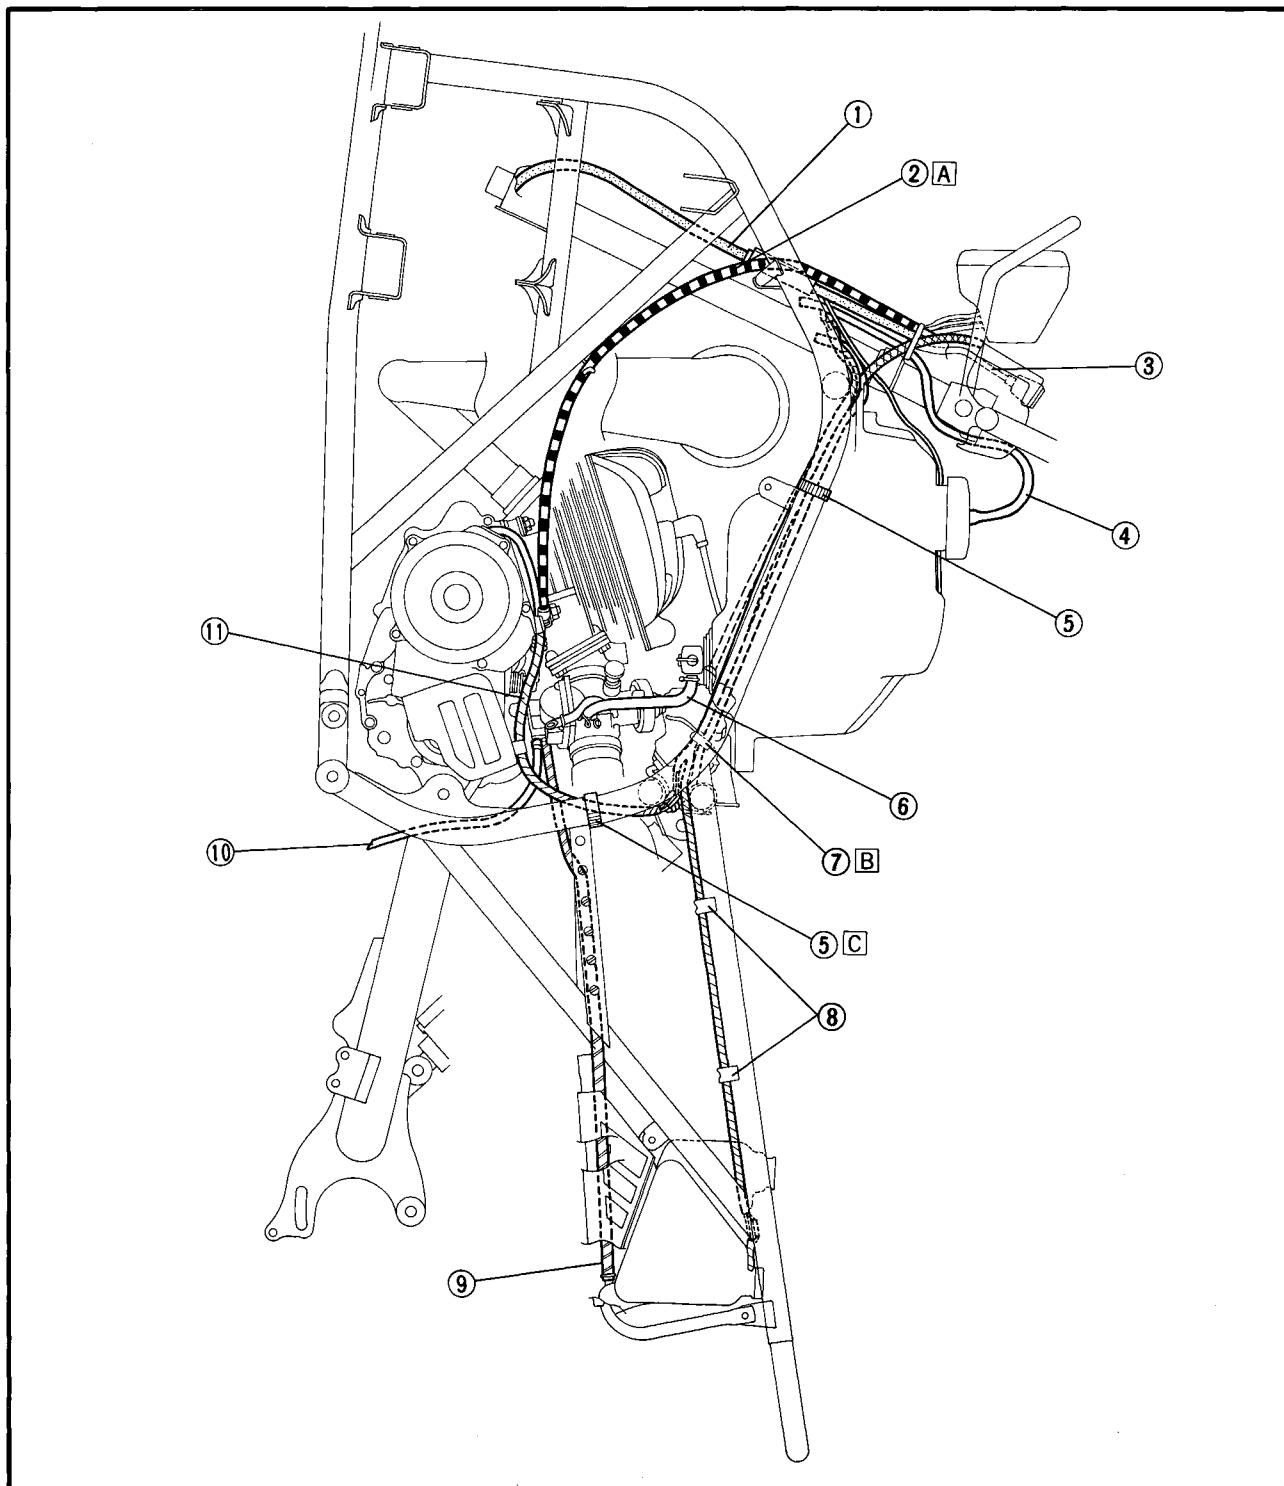

2