




a) Spring length

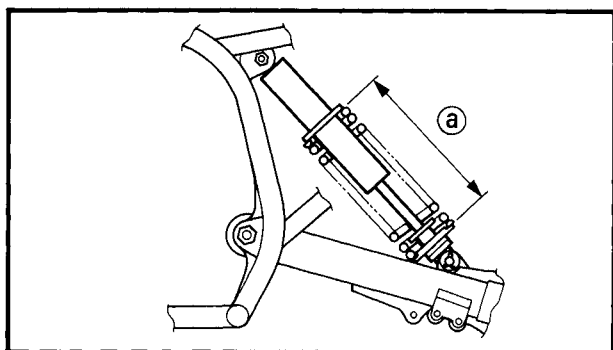

Standard Spring Length (Installed):
230 mm (9.1 in)

Minimum Length (Installed):
222 mm (8.7 in)

Maximum Length (Installed):
234 mm (9.2 in)

⚠ CAUTION:

Never attempt to turn the adjuster beyond the maximum or minimum setting.

- Tighten the locknuts.



Locknut:
55 Nm (5.5 m·kg, 40 ft·lb)

TIRE INSPECTION

⚠ WARNING:

This model is equipped with low pressure tires. It is important that they be inflated correctly and maintained at the proper pressures.

• TIRE CHARACTERISTICS

- 1) Tire characteristics influence the handling of ATV's. The tires listed below have been approved by Yamaha Motor Co., Ltd. for this model. If other tire combinations are used, they can adversely affect your machine's handling characteristics and are therefore not recommended.

	Manufacturer	Size	Type
Front	Dunlop	AT21 x 7-10	KT894
	Cheng shin	AT21 x 7-10	C873
Rear	Dunlop	AT21 x 10-8	KT895
	Cheng shin	AT21 x 10-8	C874

• TIRE PRESSURE

- 1) Recommended tire pressure

Front 30 kPa (0.30 kg/cm², 4.3 psi)

Rear 25 kPa (0.25 kg/cm², 3.6 psi)