



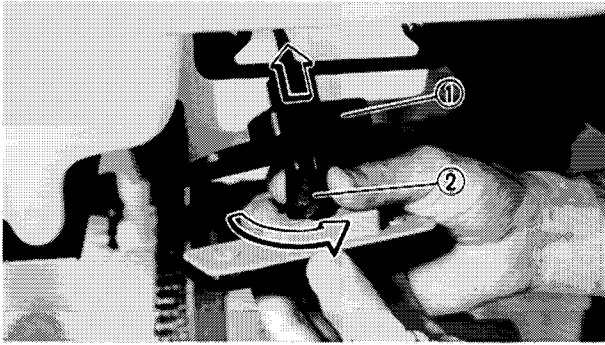

2. Pull back the rubber holder ① .
3. Remove:
 - Bulb holder ②Turn the bulb holder counterclockwise.

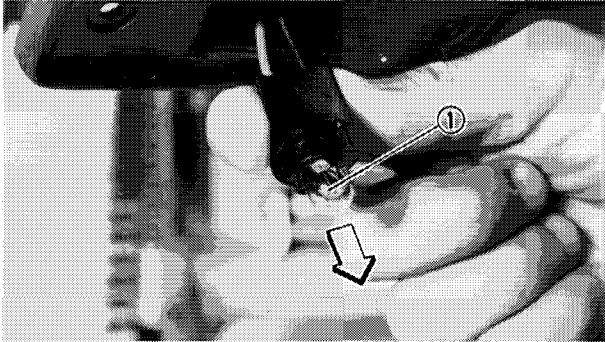

4. Pull out the defective bulb ① .

5. Install:
 - Taillight bulb (New)
 - Components above list (Steps "3, 2 and 1")

3