


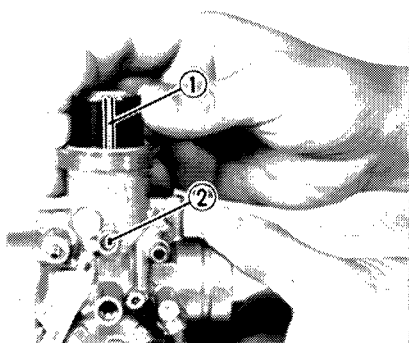


## 1. Install:

- Throttle valve

**NOTE:**

Align the groove ① of the throttle valve with the projection ② of the carburetor body.

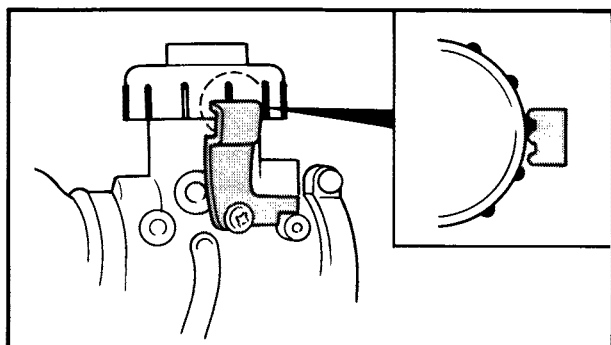

## 2. Install:

- Stopper plate

**NOTE:**

Match one of the projections on the top cover with one of the two dents on the stopper plate.

**CAUTION:**

Tighten the top cover further to match as required, and never loosen.



**Screw (Stopper Plate):**  
3 Nm (0.3 m·kg, 2.2 ft·lb)

## 3. Adjust:

- Idle speed

Refer to the "IDLE SPEED ADJUSTMENT" section in the CHAPTER 3.



**Idle Speed:**  
1,450 ~ 1,550 r/min

## 4. Adjust:

- Throttle cable free play

Refer to the "THROTTLE CABLE FREE PLAY ADJUSTMENT" section in the CHAPTER 3.



**Free Play:**  
4.0 ~ 6.0 mm (0.16 ~ 0.24 in)