




REMOVAL

1. Remove:

- Carburetor

Refer to "CARBURETOR – REMOVAL" section.

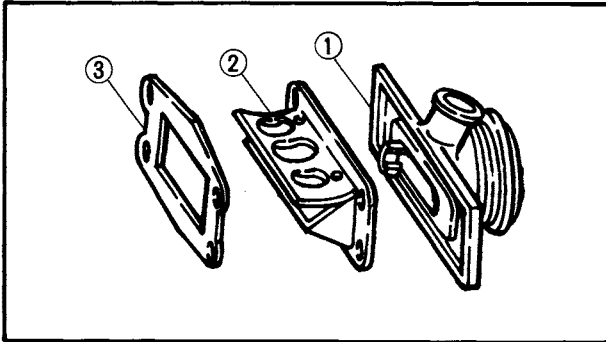


2. Remove:

- Carburetor joint ①
- Reed valve assembly ②
- Gasket ③

DISASSEMBLY

1. Remove:

- Stopper plate ①
- Reed valve ②

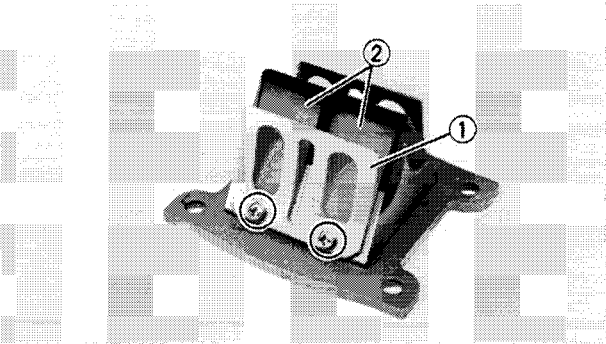

INSPECTION

1. Inspect:

- Rubber joint

Weathering/Other deterioration → Replace.

- Reed petals

Fatigue/Cracks → Replace.

Inspection steps:

- Visually inspect the reed petals.

NOTE:

Correct reed petals should fit flush or nearly flush against neoprene seats.

- If in doubt as to sealing ability, apply suction to carburetor side of assembly.
- Leakage should be slight to moderate.