


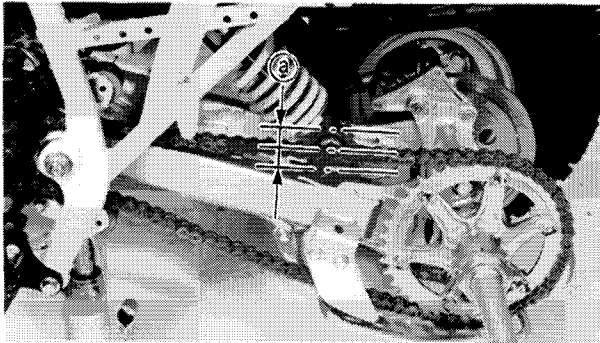

15. Release the parking brake.

16. Adjust:


- Drive chain slack ^a

Refer to the "DRIVE CHAIN SLACK ADJUSTMENT" section in the CHAPTER 3.



Drive Chain Slack:

30 ~ 40 mm (1.18 ~ 1.57 in)

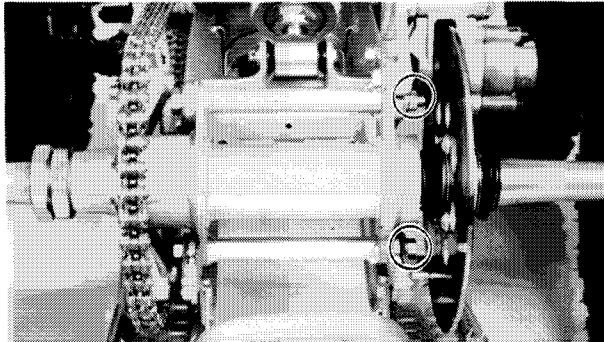

17. Tighten:

- Nut (Rear axle hub – Upper)
- Nut (Rear axle hub – Lower)



**Nut (Rear Axle Hub –
Upper and Lower):**

50 Nm (5.0 m·kg, 36 ft·lb)