

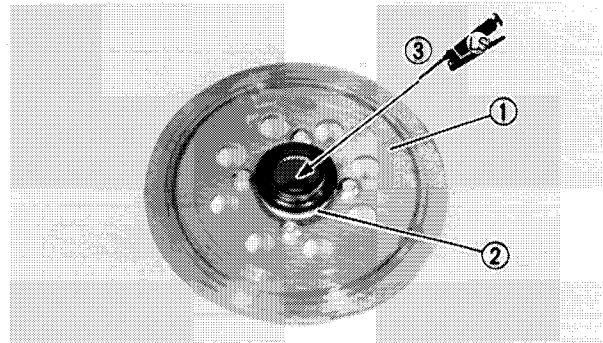


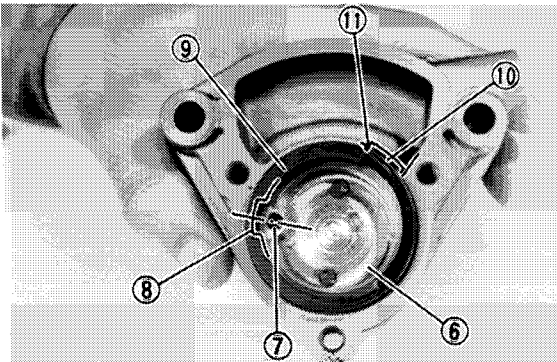

- Install the pad (Inner) ③ while making sure that the guide pin ④ is inserted in the grommet ⑤ on the caliper body.
- Install the pad (Outer) ⑥ in the caliper body in such a way that the guide hole ⑦ of the pad (Outer) aligns (In center) with the slot ⑧ of the guide ring ⑨ .
For proper seating of the guide ring ⑨ be sure that the guide projection ⑩ is seated in the cut-out ⑪ of the caliper body.
- Remove the guide ring ⑨ .

3. Install:

- Brake disc ①
(to brake disc hub ②)

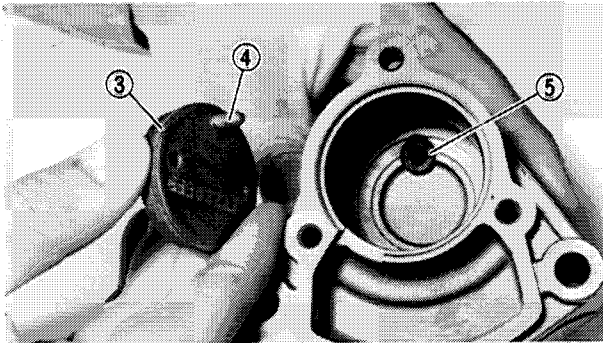

Bolt (Brake Disc):
28 Nm (2.8 m·kg, 20 ft·lb)


4. Lubricate:

- Splines ③ (Brake disk hub)



**Lightweight Lithium-soap
Base Grease**

6

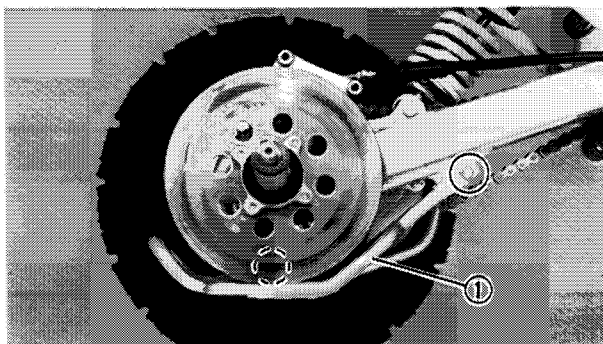

5. Install:

- Under guard ①



Bolt (Under Guard):
23 Nm (2.3 m·kg, 17 ft·lb)