




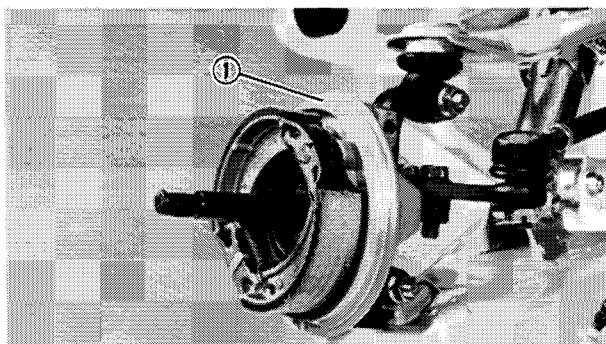

8. Remove:
- Brake shoe plate ①

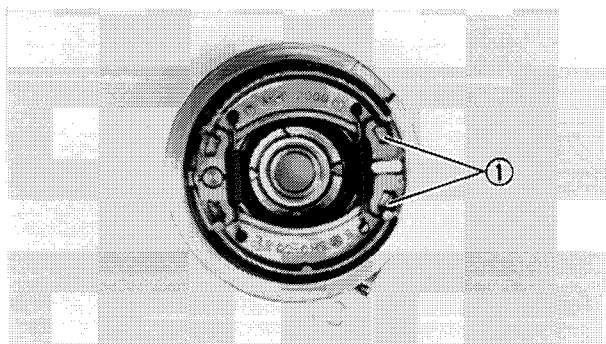

9. Remove:
- Brake shoes ①

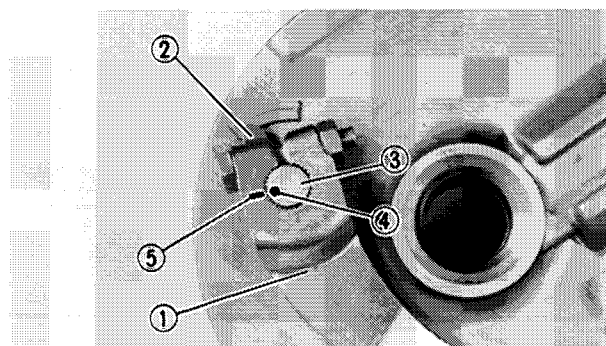

10. Remove:
- Brake cam lever ①
  - Wear indicator plate ②
  - Camshaft ③

## NOTE:

Place an aligning mark ④ next to the punched mark ⑤ on the camshaft lever before removal so that it can be reinstalled in the original position, which means that the punched mark will be on the line perpendicular to the cut-out of the cam lever.

# 6

## INSPECTION

1. Inspect:
- Wheel
- Cracks/Bends/Warpage → Replace.