


DRIVE CHAIN AND SPROCKET

NOTE:


Before removing the drive chain and sprockets, drive chain slack and 10-link length of drive chain should be measured.

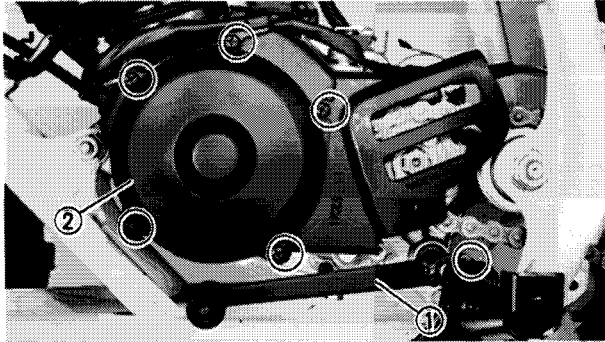

REMOVAL


1. Remove:

- Change pedal ①
- Crankcase cover ② (Left)

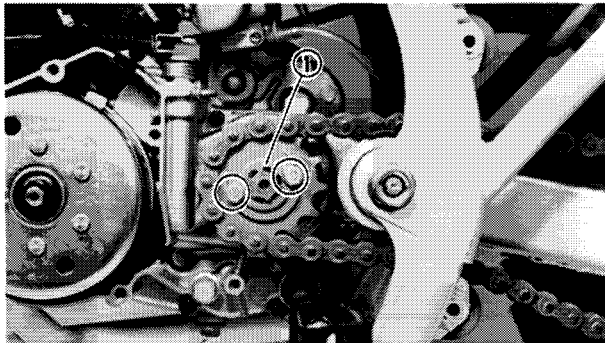

2. Remove:

- Holder ① (Drive sprocket)

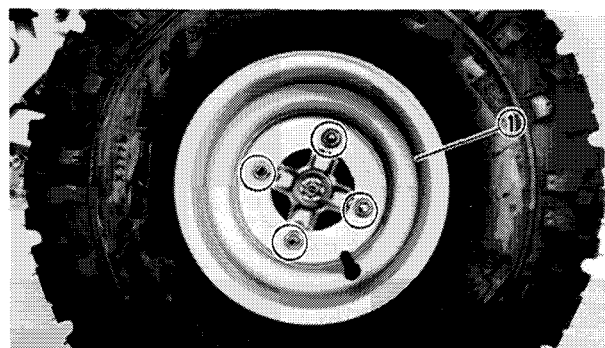


3. Loosen:

- Nuts (Rear wheel ① – Left)

4. Elevate the rear wheels by placing the suitable stand under the rear frame.

5. Remove:

- Rear wheel ① (Left)

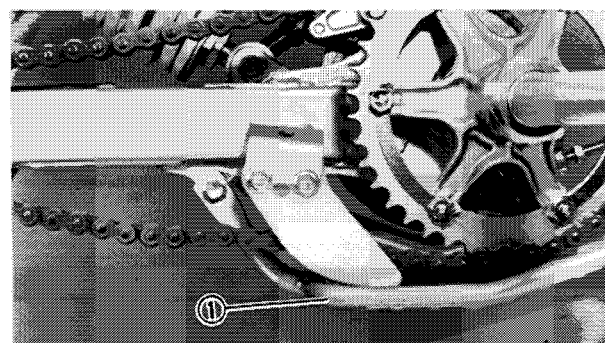

6. Remove:

- Under guard ①