




Bolt (Under Guard):
23 Nm (2.3 m · kg, 17 ft · lb)

Nut (Rear Wheel):
45 Nm (4.5 m · kg, 33 ft · lb)

Bolt (Drive Sprocket Holder):
10 Nm (1.0 m · kg, 7.2 ft · lb)

Screw (Crankcase Cover – Left):
10 Nm (1.0 m · kg, 7.2 ft · lb)

Bolt (Change Pedal):
14 Nm (1.4 m · kg, 10 ft · lb)

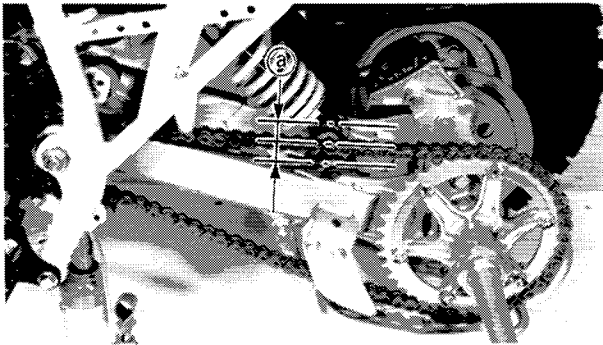

5. Adjust:


- Drive chain slack (a)

Refer to the "DRIVE CHAIN – SLACK ADJUSTMENT" section in the CHAPTER 3.



Drive Chain Slack:
30 ~ 40 mm (1.18 ~ 1.57 in)

6

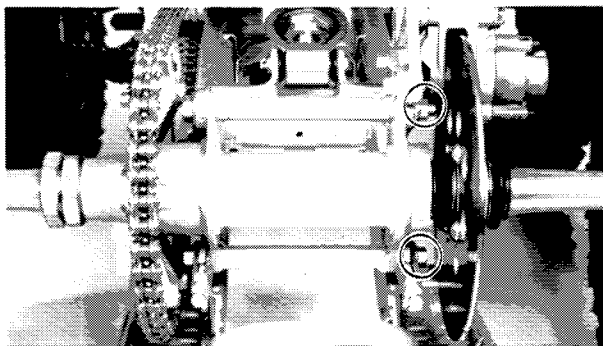

6. Tighten:

- Nut (Rear axle hub – Upper)
- Nut (Rear axle hub – Lower)



Nut (Rear Axle Hub – Upper and Lower):
50 Nm (5.0 m · kg, 36 ft · lb)