


# BLOCK DIAGRAM

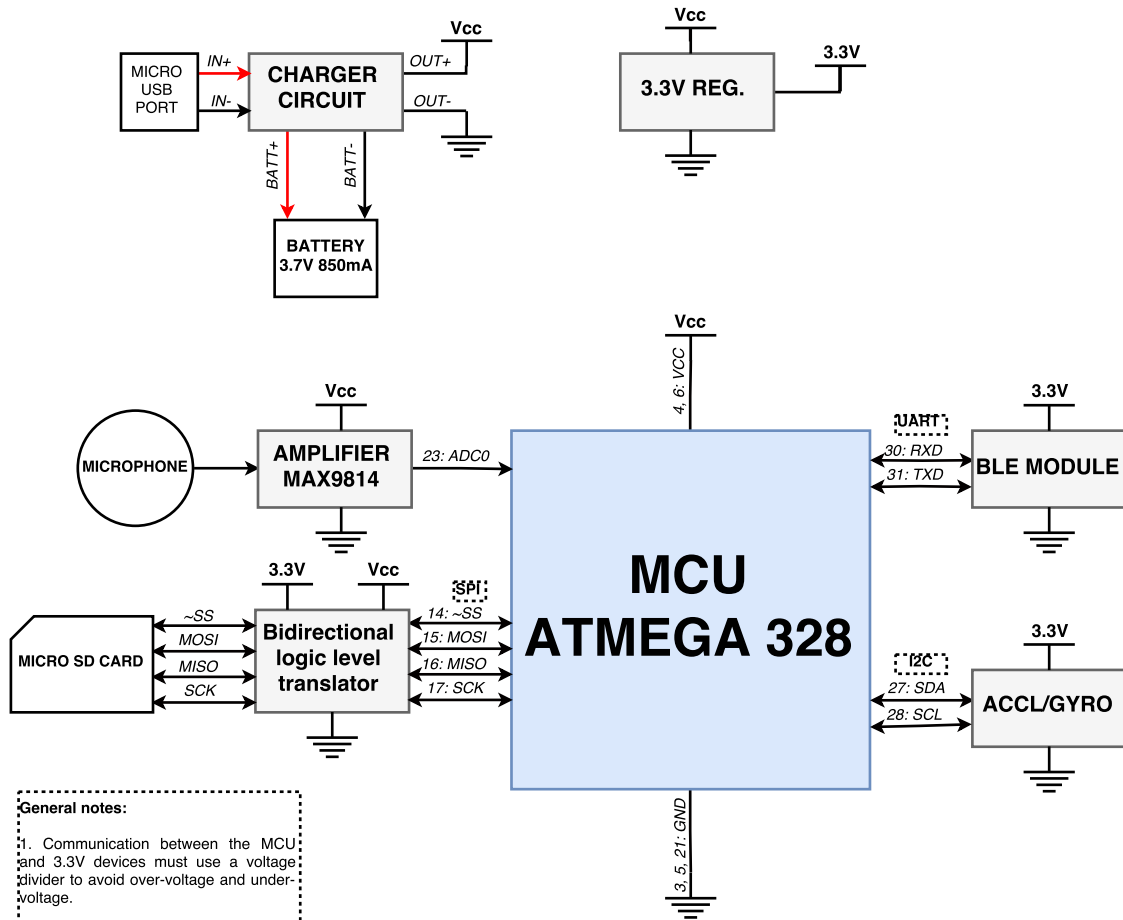

## General notes:

1. Communication between the MCU and 3.3V devices must use a voltage divider to avoid over-voltage and under-voltage.
2. For the SD card, a proper logic translator is encouraged but not 100% necessary.
3. This device must operate in a low power configuration.