


Manufacturing documentation:


View from Top side (Scale 1:4)

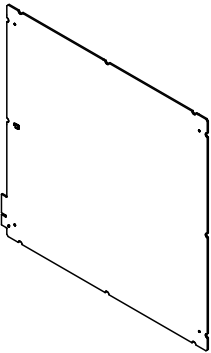

Drill Table

Symbol	Count	Hole Size	Plated	Hole Tolerance
□	161	0.30mm	Plated	
▽	4	1.00mm	Plated	
165 Total				

Drill Drawing View (Scale 1:2)

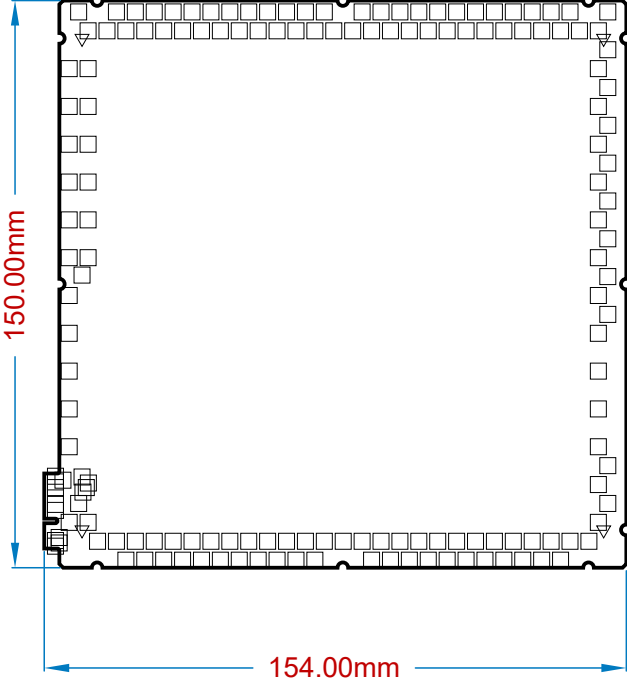

Layer Stack Legend

Material	Layer	Thickness	Dielectric Material	Type	Gerber	Comments
	Top Overlay			Legend	GTO	
Surface Material	Top Solder	0.010mm	SM-001	Solder Mask	GTS	white
Nickel, Gold	Top Surface Finish	0.004mm		Surface Finish		
CF-004	Top Layer	0.035mm		Signal	GTL	
Core		0.711mm	Core-039	Dielectric		-
CF-004	Bottom Layer	0.035mm		Signal	GBL	
Nickel, Gold	Bottom Surface Finish	0.004mm		Surface Finish		
Surface Material	Bottom Solder	0.010mm	SM-001	Solder Mask	GBS	white
	Bottom Overlay			Legend	GBO	
Total thickness: 0.809mm						

Notes:

1. Or comperable stack-up
2. Minimal width/clearance 0.125mm

ETH zürich			Project: STB DUT Carrier	
Drawing number:	Rev: A	Format: A3	Laboratory: PBL	Sheet: STB_DUTcarrier_manufacturing.PCBDwf
Date: 06.11.2022			Drawn by: flmoll	Page: 1 of 1
File: C:\Users\phili\polybox\05_AltiumProjects\SolarTestBed\STB_DUTCarrier\STB_DUTcarrier_manufacturing.PCBDwf				