



Manufacturing documentation:

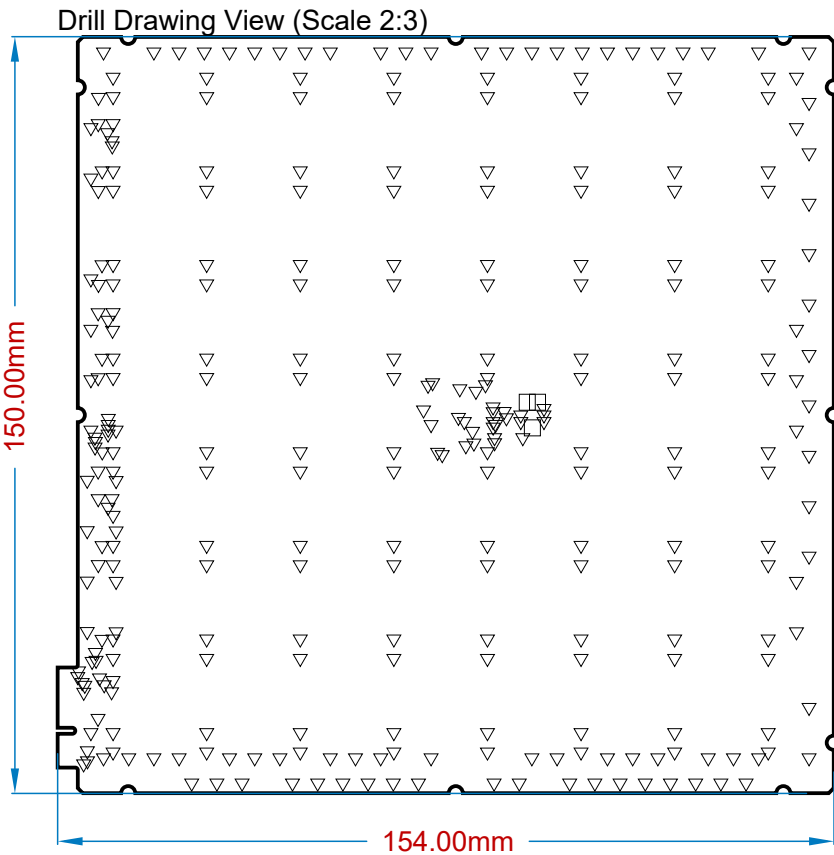

Drill Table

Symbol	Count	Hole Size	Plated	Hole Tolerance
▽	302	0.30mm	Plated	
□	3	1.00mm	Non-Plated	
	305 Total			

View from Top side (Scale 1:4)

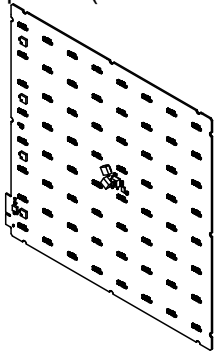

Layer Stack Legend

Material	Layer	Thickness	Dielectric Material	Type	Gerber	Comments
	Top Overlay			Legend	GTO	
Surface Material	Top Solder	0.010mm	SM-001	Solder Mask	GTS	white
Nickel, Gold	Top Surface Finish	0.004mm		Surface Finish		
CF-004	Top Layer	0.035mm		Signal	GTL	
Prepreg		0.079mm	PP-008	Dielectric		-
Prepreg		0.079mm	PP-008	Dielectric		-
CF-004	Int1 (Signal)	0.035mm		Signal	G1	
Core		0.305mm	Core-031	Dielectric		-
CF-004	Int2 (GND)	0.035mm		Signal	G2	
Prepreg		0.079mm	PP-008	Dielectric		-
Prepreg		0.079mm	PP-008	Dielectric		-
CF-004	Bottom Layer	0.035mm		Signal	GBL	
Nickel, Gold	Bottom Surface Finish	0.004mm		Surface Finish		
Surface Material	Bottom Solder	0.010mm	SM-001	Solder Mask	GBS	white
	Bottom Overlay			Legend	GBO	

Total thickness: 0.788mm
target 0.8mm

Notes:

1. Or comperable stack-up
2. Minimal width/clearance 0.125mm

ETH zürich			Project: STB Validation Board	
Drawing number:	Rev: A	Format: A3	Laboratory: PBL	Sheet: STB_ValidationBoard_manufacturing.PCBD
Date: 06.11.2022			Drawn by: mayerph	Page: 1 of 1
File: C:\Users\phili\polybox\05_AltiumProjects\SolarTestBed\STB_ValidationBoard\STB_ValidationBoard_manufacturing.PCBDwf				